


Kanaflo 110 CL/110 GR (110 CL/110 GR)

Heavy-duty water suction and discharge hose

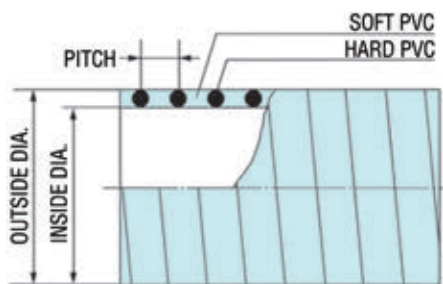

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Heavy-duty water suction hose

Construction: Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

Note: Not a food-grade hose

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
3/4	0.95	0.22	1.9	86	29.8	0.16	100
1	1.25	0.22	1.9	86	29.8	0.26	100
1-1/4	1.52	0.26	2.7	79	29.8	0.37	100
1-1/2	1.81	0.30	2.8	72	29.8	0.44	100
2	2.38	0.33	3.9	72	29.8	0.74	100
2-1/2	2.92	0.37	5.0	72	29.8	1.01	100
3	3.41	0.37	7.0	62	29.8	1.21	100
4	4.50	0.43	9.1	55	29.8	2.01	100
5	5.55	0.45	14.0	33	28.0	2.45	50,100
6	6.67	0.53	15.0	33	28.0	3.37	50,100
8	8.83	0.70	20.0	28	28.0	5.80	25



Suction & Discharge
 Cold Weather/Flexible
 Heavy-Duty
 Abrasion Resistance
 Petroleum
 Food Grade
 Duct
 Specialty
 Accessories