



GS



Size Range (In)75" to 12"
 Standard Length (Ft) 12'
 Standard Color iron oxide red
 Temperature Range (°F) -65° to 550°
 intermittent to 600°

- Double-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Ideal for plastic processing applications
- Non-kinking
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing

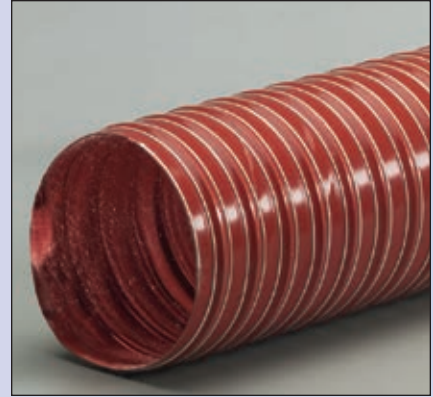

A **F**




CWGS




Size Range (In) 2" to 12"
 Standard Length (Ft) 25'
 Standard Color iron oxide red
 Temperature Range (°F) -65° to 550°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix
- Light weight and flexible
- Available in longer lengths than traditional mandrel-built hose
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing

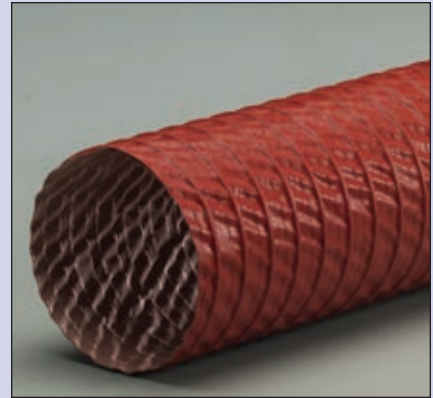


A **F**

BDS




Size Range (In) 1" to 10"
 custom to 12"
 Standard Length (Ft) 12'
 Standard Color iron oxide red
 Temperature Range (°F) -65° to 500°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Non-kinking
- Resistant to many oils and solvents, ozone, water, fungus and alkalis
- Not recommended for continuous flexing

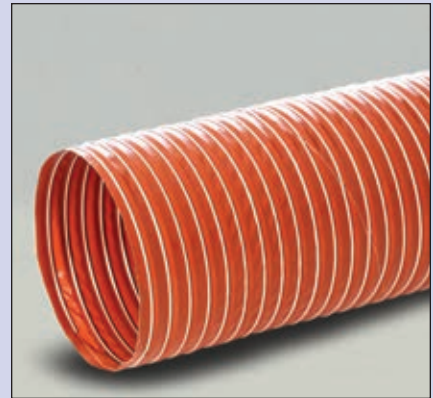

A **F**

CW-325




Size Range (In) 2" to 10"
 custom to 16"
 Standard Length (Ft) 25'
 Standard Color black
 Temperature Range (°F) -20° to 325°


- Single-ply acrylic coated polyester fabric hose reinforced with a spring steel wire helix
- Ideal for air and fume handling applications
- Excellent choice for overhead vehicle exhaust systems
- Light weight and flexible
- Listed as UL 94V-0 flame retardant
- Available with an external PVC wearstrip (CW-325-W)



A **F** **RU**




NS




Size Range (In) 1" to 12"
 Standard Length (Ft) 12'
 Standard Color iron oxide red inner layer
 black outer layer
 Temperature Range (°F) -65° to 550°

- Double-ply fabric hose with a silicone coated fiberglass inner layer and a silicone coated Nomex® outer layer reinforced with a spring steel wire helix and external filament fiberglass cord
- Nomex® material increases flex life and abrasion resistance
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Ideal for applications where constant flexing is involved
- Non-kinking
- Resistant to many oils and solvents, ozone, water, fungus and alkalis

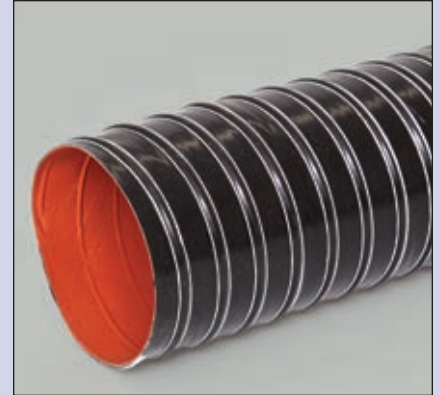

A **F**

GN



Size Range (In) 1" to 12"
 Standard Length (Ft) 12'
 Standard Color black
 Temperature Range (°F) -40° to 300°

- Double-ply neoprene coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord
- Offers higher temperature characteristics than traditional neoprene hoses
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Flame retardant to UL 94V-0
- Non-kinking
- Not recommended for continuous flexing



A **F**

Flex-Vest®




Size Range (In) 1" to 6"
 custom to 8"
 Standard Length (Ft) 12'
 custom to 25'
 Standard Color iron oxide red inner layer
 black outer layer
 Temperature Range (°F) -65° to 550° inner layer
 intermittent to 600°
 -40° to 250° outer layer

- Inner Layer; Double-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix
- Outer layer; Single-ply neoprene coated polyester fabric hose reinforced with a spring steel wire helix
- Insulation; 1-inch fiberglass insulation (R Value = 4)
- Insulated dryer hose
- Combines flexibility with minimal heat loss
- Suited for air handling applications at low positive and low negative pressures
- Good flexibility
- Excellent chemical resistance



A

Raceflex®



Size Range (In) 1.5" to 3"
 custom to 8"
 Standard Length (Ft) 12'
 Standard Color silver
 Temperature Range (°F) -65° to 625°

- Light weight laminate of fiberglass and vacuum metallized polyester film
- Heat reflective to 625°F
- Light weight and flexible
- Smooth bend radius
- 2.64-inch compression per foot of hose
- Designed for brake ducting and ventilation of drive compartments in racecars



A **F**