



flexFLO™ U 113 (113UVCLBK)

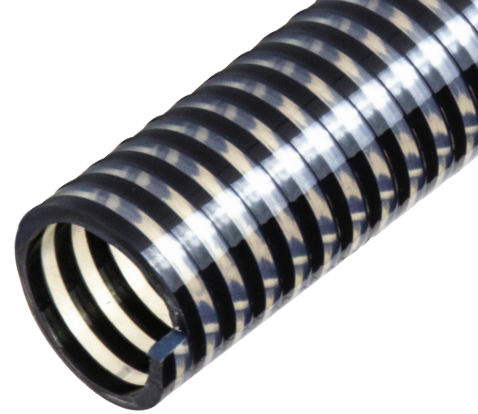

All weather suction and discharge hose

An agile solution for diverse agricultural needs. Lightweight and flexible, its blended polyurethane construction enhances abrasion and UV resistance. Ideal for air seeder, fertilizer sprayer, foam markers, irrigation, manure spreading, and fish suction applications.

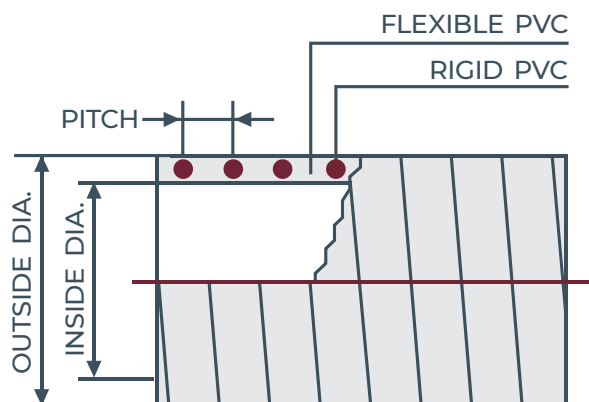

FEATURES

Lightweight and flexible water and suction hose. Improved abrasion and UltraViolet resistance because of the blended polyurethane construction. Clear sidewall permits visual check of material flow. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

APPLICATIONS

All weather water and suction hose with multiple agricultural applications including, air seeder, fertilizer sprayer, foam markers, irrigation, and manure spreading. Also useful in fish suction applications.

TEMP. RANGE

-13°F to 140°F

CONSTRUCTION

Flexible PVC blended with polyurethane, rigid PVC helix, smooth bore, smooth O.D.

NOTE

Not a food-grade hose

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, In Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
1	1.25	0.22	1.9	86	29.8	0.25	100
1-1/4	1.47	0.26	3.0	80	29.8	0.25	100
1-1/2	1.77	0.30	4.0	70	29.8	0.39	100
1-3/4	2.00	0.30	4.5	65	29.8	0.48	100
2	2.30	0.33	5.0	65	29.8	0.63	100
2-1/2	2.84	0.37	6.0	65	29.8	0.87	100
3	3.35	0.37	8.0	55	29.8	1.05	100

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*