


flexDUCT™ 630 (630 ED)



Medium-duty ducting and blower hose

A durable solution with a thicker sidewall for enhanced abrasion resistance. Designed for medium-duty blower and ducting applications, including hay baling, street refuse, grain dust, cotton pickers, wood chips, straw blowing, and leaf and grass collection. Constructed with EPDM rubber, a polypropylene helix.

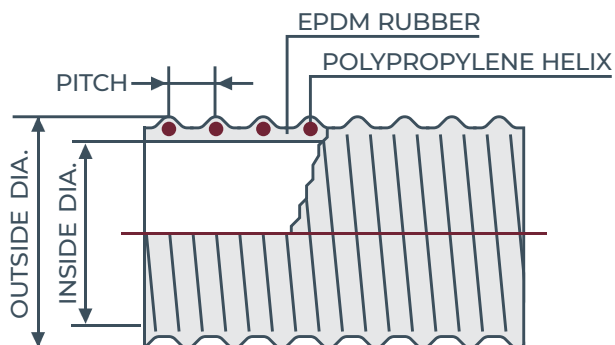

FEATURES

Thicker sidewall for more abrasion resistance. External helix acts as a scuff guard. 100% rubber sidewall (no fabric).

APPLICATIONS

Medium-duty blower and ducting applications such as hay baling, street refuse, grain dust, cotton pickers, wood chips, straw blowing, leaf and grass collection.

CONSTRUCTION

EPDM rubber, polypropylene helix, smooth bore, corrugated O.D.

TEMP. RANGE

-40°F to 158°F

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
4	4.53	0.67	4.0	—	—	0.70	50
6	6.56	0.83	6.0	—	—	1.05	50
8	8.66	0.87	8.0	—	—	1.46	50

Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. *Kanaflex will not be responsible for damage to hose due to over flexing.*