



ABBOTT RUBBER COMPANY, INC.

Food & Beverage
Hose & Accessories

Serving the Food & Beverage Markets for Over 65 Years



We welcome you to visit our 100,000 square foot facilities in Elk Grove Village, IL.



Order Entry and Technical Assistance - Our Specialty

ABBOTT RUBBER COMPANY, INC.

1700 Nicholas Blvd.
Elk Grove Village, IL 60007

(847) 952-1800

TOLL FREE

(800) 852-1855

FAX

(847) 952-0156

sales@bbotrubber.com

www.abbotrubber.com



Unparalleled Personalized Service

Kanaflex

Continental

LGV COUPLING

THE NOVA FLEX GROUP

TUDERTECHNICA

GOODYEAR

tigeraflex

SAINT-GOBAIN

COXREELS

DIXON
The Right Connection™

We can fabricate to your exact hose needs.

NAHAD
Industrial Hose
Listed Fabricator

NAHAD
HOSE SAFETY INSTITUTE.org
MEMBER

NAHAD
Hydraulic Hose
Listed Fabricator

MEMBER OF THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

All of our hose assemblies are fabricated according to the latest NAHAD Hose Safety Institute's Guidelines

Quick Index

Hose - Corrugated	Page	Nozzles	Page
Continental		Black - (Bronze, Aluminum, Stainless Steel)	34
Extremeflex™ Red w/ Ez-Clean Cover Hose	10	Blue - (Bronze, Aluminum, Stainless Steel)	34
Extremeflex™ Gray Beverage Hose	14	Gray - (Bronze, Aluminum, Stainless Steel)	34
Extremeflex™ Gray Food Hose	16	Red - (Bronze, Aluminum, Stainless Steel)	34
Extremeflex™ Red Beverage Hose (Microban®)	14	White - (Bronze, Aluminum, Stainless Steel)	34
Extremeflex™ White Food Hose	16	Compact Jr. Nozzle - Black - (Bronze & Stainless Steel)	34
EZ Glide Wine™ Transfer Hose	11	Compact Jr. Nozzle - White - (Bronze & Stainless Steel)	34
Plicord® Distillery Hose	12		
Kanaflex		Reels & Wall Mount Hangers	
FW Clear Braided FDA Hose	11	Auto-Rewind Hose Reels	33
Novaflex		Hand-Crank Hose Reels	33
6230WG Guernsey Hose	13	Wall Mount - Hose Hangers & Holders	33
6314WT Corrugated Food Hose	15		
6433WU UHMW Hose	15	Sheet Rubber	
Tudertecnica		Tan Natural Rubber	52
Glidetect® Butyl Hose	10	White Nitrile Rubber	52
Glidetect® Nitrile Hose	13		
Glidetect® UHMW Distillery Hose	12	Tri-Clamp Accessories	
		Gaskets	49
Hose - Crush-Proof		Sight Glasses	39
Continental		Solid End Caps	50
Brewline Hose (Microban®)	8	Tri-Clamps	49
Drinkline™ Hose	8	Tri-Clamps (Bolted)	49
Lactopal® Hose	9		
Purple Snake® Hose	4	Tri-Clamp Adapters	
Vintner™ Hose (Classic)	6	Tri-Clamp 45° Elbow	41
Vintner™ Reserve 250 EPDM Hose	5	Tri-Clamp 90° Elbow	41
Vintner™ Reserve 250 Butyl Hose	5	Tri-Clamp Concentric Reducer	42
Novaflex		Tri-Clamp Cross	40
6301WT Discharge Hose	6	Tri-Clamp Eccentric Reducer	43
6506WB Connoisseurs Hose	7	Tri-Clamp x GHT (Garden Hose Thread) Adapter	35
6507NB Novabrew Hose	7	Tri-Clamp Tee	40
		Tri-Clamp x Female NPT Adapter	45
Hose - Dry Foods Handling		Tri-Clamp x Male NPT Adapter	44
Alfagomma		Weld x Tri-Clamp 45° Elbow	46
T720LG Dry Foods Handling Hose	22	Weld x Tri-Clamp 90° Elbow	46
Norres		Weld x Weld 45° Elbow	46
350AS Anti-Static FDA Flexible Hose	23	Weld x Weld 90° Elbow	46
Novaflex			
6201WG Dry Foods Discharge Hose	22	Tri-Clamp Cam & Groove Adapters	
Tigerflex		Cam-Lock Female x Tri-Clamp Adapter	47
WT Clear PVC Material Handling Hose	23	Cam-Lock Male x Tri-Clamp Adapter	47
Hose - High-Temp Silicone		Tri-Clamp Low Pressure Hose Ends	
Abbott		Tri-Clamp x Hose Shank Adapter (Long)	47
FDA Braided Silicone Tubing	21	Tri-Clamp x Hose Shank Adapter (Short)	47
Tudertecnica			
Tusil® Bright Silicone Vacuum Hose	21	Tri-Clamp Valves	
		Mini Valves	47
Hose - Protection		Tri-Clamp Ball Valve	48
Adjusta-Flex Hose Donuts	38	Tri-Clamp Butterfly Valve (Pull Handle)	48
HoseGard Hose Supports	38	Tri-Clamp Butterfly Valve (Trigger Handle)	48
Silicone Rubber End Bumpers	38		
		Tubing - Non-Reinforced	
Hose - Smooth Cover		FDA Grade Clear PVC Flexible Tubing	24
Continental		Laboratory Grade Clear PVC Flexible Tubing	25
Gray Plicord® Food Hose	17	Tygon® 2375 High-Purity Alcohol Transfer Tubing	25
Nutriflo® Clear Suction Hose	19		
White Flexwing® Food Hose	17	Tubing - Reinforced	
Novaflex		Abbott	
6285WN Potable Water Hose	18	Regular Wall FDA Clear Braided PVC Tubing	26
6300WT Food Hose	18	Kuritech	
6403CU UHMW Hose	20	K3130 Heavy-Wall FDA Clear Braided PVC Tubing	26
6500WB Connoisseurs Hose	20	K6158 High Purity PVC Potable Water Hose	27
		K7130 Poly-Wire Clear Vacuum Tubing	28
Hose - Special Purpose		K7160 Poly-Spring Clear Vacuum Tubing	28
High Pressure FDA Wash-Down Hose	29	K7300 Clear Braid/Wire Inserted Vacuum Tubing	27
Hot Edible Fryer Oil Hose	29		
		Wash-Down Accessories	
Hose - Wash-Down		Caps - GHT Brass	36
Continental		Garden Hose - Adapters	37
Blue Fortress® 300 Wash-Down Hose (Microban®)	30	Garden Hose Couplings	36
Fortress 300 White - Wash-Down Hose	31	Garden Hose Couplings - Lead Free Brass	36
Super Sani-Wash™ 300 - Wash-Down (Microban®)	31	Garden Hose Couplings - Stainless Steel	36
Yellow Fortress® 300 Wash-Down Hose (Microban®)	30	Garden Hose Couplings - Stainless Steel	36
		Hose Menders	36
Mixer Hose Stations		Wash-Down Long Shank Garden Hose Couplings	36
Bronze - Hot & Cold Mixer		Wash-Down Rigid Hose Ends - Brass	35
W/ Gauge	32	Wash-Down Rigid Hose Ends - Plated Steel	35
No Gauge	32	Wash-Down Rigid Hose Ends - Stainless Steel	35
Stainless Steel - Hot & Cold Mixer		Wash-Down Swivel Adapters	
W/ Gauge	32	Brass/Stainless Steel (GHT Female x 1/2" NPT Male)	35
No Gauge	32	Brass/Stainless Steel (GHT Female x 3/8" NPT Male)	35
Steam & Cold Mixer Stations	32	Wash-Down Swivel Adapters	
		Stainless Steel (GHT Female x 1/2" NPT Male)	35
		Stainless Steel (GHT Female x 3/8" NPT Male)	35
		Washers & Washers w/ Filters	36

Prices subject to change without notice.

Food & Beverage Hose - Crush-Proof



Continental Purple Snake® Hose

Service/Application:

High quality hose for beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Meets the recommendation XXI of BfR. Taste and odor free tube is suitable for pure alcohol up to 98%.

Temperature Range:

-22°F to 203°F (-30°C to 95°C)

Construction:

White, EPDM (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies. Red (wrapped impression) cover w/ Blue line. Purple Snake® Plus Conductive hose also available. Rated at 3:1 Safety.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.438	232#	14.7	6.0	0.50	131	1538-1000	\$ 29.54	\$ 364.20
1½"	2.187	232#	14.7	9.0	1.08	131	1538-1500	42.14	394.30
2"	2.750	232#	11.8	12.0	2.20	100	1538-2000	47.11	506.26
3"	3.875	232#	8.8	20.0	3.23	*300	1538-3000	78.79	POR
4"	5.125	232#	8.8	28.0	4.30	*200	1538-4000	123.07	POR

Product Code: 500-005

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



Food & Beverage Hose - Crush-Proof



Continental Vintner™ Reserve 250# Butyl Hose

Service/Application:

For handling in-plant and/or tank truck transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

-30°F to 220°F (-34°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a Monofilament helix. Gray, EPDM synthetic rubber (wrapped impression) cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.560	250#	27.0	3.0	0.60	100	1536R-1000	\$ 27.30	\$ 364.20
1½"	2.060	250#	27.0	4.0	0.83	100	1536R-1500	34.70	356.34
2"	2.610	250#	27.0	7.0	1.18	100	1536R-2000	42.14	506.26
3"	3.810	250#	27.0	12.0	2.34	100	1536R-3000	62.60	1,023.30

Product Code: 549-381

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



Continental Vintner™ Reserve 250# EPDM Hose

Service/Application:

For handling in-plant and/or tank truck transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

-30°F to 220°F (-34°C to 104°C)

Construction:

White EPDM (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a Monofilament helix. Gray, EPDM synthetic rubber (wrapped impression) cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.590	250#	27.0	3.0	0.64	*100	1536E-1000	\$ 27.30	\$ 364.20
1½"	2.090	250#	27.0	4.0	0.89	*100	1536E-1500	34.70	356.34
2"	2.640	250#	27.0	7.0	1.25	*100	1536E-2000	42.14	506.26
2½"	3.180	250#	27.0	10.0	1.62	*100	1536E-2500	68.39	POR
3"	3.850	250#	27.0	12.0	2.45	*100	1536E-3000	62.60	1,023.30

Product Code: 549-695

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
*AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Crush-Proof



Continental Vintner™ Hose (Classic)

Service/Application:

For handling in-plant and/or tank truck transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

-30°F to 220°F (-34°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a Monofilament helix. Gray, EPDM synthetic rubber (wrapped impression) cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.620	250#	27.0	3.0	0.71	100	1536-1000	\$ 28.80	\$ 364.20
1½"	2.110	250#	27.0	4.0	0.98	100	1536-1500	36.60	356.34
2"	2.680	250#	27.0	7.0	1.38	100	1536-2000	44.46	506.26
3"	3.810	250#	27.0	12.0	2.80	100	1536-3000	66.07	1,023.30

Product Code: 549-886

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



Novaflex 6301WT Oil Resistant Discharge Hose

Service/Application:

Discharge hose used for oily liquids, hot water, cold beverages, wine, vinegar and other applications that require flexibility and ruggedness. Meets FDA, USDA & 3-A Sanitary standards Authorized #1376.

Temperature Range:

-40°F to 210°F (-40°C to 99°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Nitrile, FDA/USDA/3-A sanitary tube reinforced with multiple plies of fabric. Gray, PVC-Nitrile (wrapped impression) cover.




Hose I.D.	Hose O.D.	W/P @ 70°F	Ply	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.210	250#	2	0.41	100	6301WT-00750-00	\$ 15.89	\$ 270.36
1"	1.590	250#	4	0.64	100	6301WT-01000-00	16.03	364.20
1½"	2.090	250#	4	0.93	100	6301WT-01500-00	22.65	356.34
2"	2.570	250#	4	1.25	100	6301WT-02000-00	26.95	506.26
3"	3.640	250#	4	5.43	100	6301WT-03000-00	43.33	824.26
4"	4.640	250#	4	2.19	100	6301WT-04000-00	54.50	1301.96

Product Code: 6301WT

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
LESS 10% FULL COILS



Food & Beverage Hose - Crush-Proof

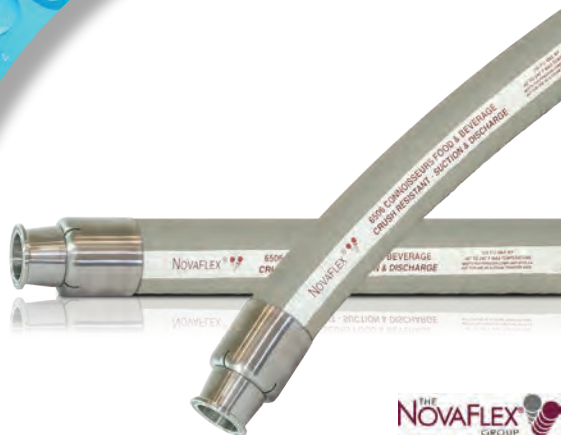

Novaflex 6506WB Connoisseurs Hose

Service/Application:

Special kink and crush resistant transfer hose for transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

40°F to 240°F (-40°C to 116°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Chlorobutyl (FDA/USDA/3-A Cert# 1376) tube reinforced with multiple plies of polyester tire cord and dual monofilament helix. Gray, EPDM synthetic rubber (wrapped impression) cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.410	250#	Full	3.0	0.33	100	6506WB-00750-00	\$ 25.76	\$ 270.36
1"	1.640	250#	Full	3.5	0.44	100	6506WB-01000-00	26.32	293.56*
1½"	2.140	250#	Full	4.5	0.63	100	6506WB-01500-00	30.10	283.04*
2"	2.770	250#	Full	7.0	1.21	100	6506WB-02000-00	47.25	408.24*
2½"	3.290	250#	Full	13.0	1.52	100	6506WB-02500-00	58.21	685.18
3"	3.790	250#	Full	16.0	1.84	100	6506WB-03000-00	70.00	729.86*

Product Code: 6506WB

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS - *ECONOMY CRIMP POLISHED FERRULES
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



Novaflex 6507NB Novabrew Hose

Service/Application:

Special kink and crush resistant transfer hose for transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

40°F to 240°F (-40°C to 116°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Chlorobutyl (FDA/USDA/3-A Cert# 1376) tube reinforced with multiple plies of polyester tire cord and dual monofilament helix. Dark Burgundy, EPDM synthetic rubber (wrapped impression) cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.640	250#	Full	3.5	0.48	100	6507NB-01000-00	\$ 32.76	\$ 364.20
1½"	2.140	250#	Full	4.5	0.65	100	6507NB-01500-00	34.41	356.34
2"	2.770	250#	Full	7.0	1.26	100	6507NB-02000-00	54.74	506.26
2½"	3.290	250#	Full	13.0	1.54	100	6507NB-02500-00	64.72	685.18

Product Code: 6507NB

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Crush-Proof

Continental Drinkline™ Discharge Hose

Service/Application:

A high quality discharge hose designed specifically for the highly demanding service of transferring non-oily liquid products in wineries and breweries.

Temperature Range:

-40°F to 220°F (-40°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with multiple fabric plies. Red, EPDM synthetic rubber (wrapped impression) cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Ply	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
3/4"	1.319	250#	4	0.45	*100	1543D-0750	\$ 22.40
1"	1.598	250#	4	0.62	100	1543D-1000	29.47
1 1/4"	1.862	250#	4	0.74	*100	1543D-1250	30.76
1 1/2"	2.114	250#	4	0.88	100	1543D-1500	40.53
2"	2.772	250#	6	1.46	100	1543D-2000	51.38
2 1/2"	3.346	250#	6	2.01	*100	1543D-2500	56.91
3"	3.846	250#	6	2.34	100	1543D-3000	71.82
4"	4.846	250#	6	3.03	*100	1543D-4000	95.55

Product Code: 549-380

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - *400 FT. MINIMUM REQUIRED

Continental Brewline Hose (Microban® Cover)

Service/Application:

A quality discharge hose designed specifically for the highly demanding service of transferring non-oily liquid products in wineries and breweries. Microban cover prohibits the growth of bacteria.

Temperature Range:

-40°F to 220°F (-40°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with multiple fabric plies. Red, EPDM synthetic rubber (wrapped impression) Microban cover w/ Blue line.



Hose I.D.	Hose O.D.	W/P @ 70°F	Ply	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1 1/2"	2.230	250#	4	1.19	100	1544-1500	\$ 44.21
2"	2.880	250#	6	1.86	100	1544-2000	55.83

Product Code: 549-003

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



Food & Beverage Hose - Crush-Proof

Continental Lactopal® FDA Discharge Hose

Service/Application:

A high-class hose for the food, pharmaceutical and cosmetic industry. Resistant to fatty and oily products. It is resistant to commonly used cleaning and disinfecting products.

Temperature Range:

-22°F to 176°F (-30°C to 80°C)
Steam clean up to 230°F (266°F max. 20 minutes)

Construction:

A special transparent plastomer coating, homogenous, smooth and free of plasticizers tube reinforced with synthetic fiber plies. Blue, oil resistant Nitrile cover (wrapped impression) USDA/3-A Sanitary standard 18-03.



Hose I.D. (in.)	Hose I.D. (mm)	Hose O.D. (in.)	W/P @ 70°F	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/2"	12	0.813	232#	3.1	0.19	131	20836414	\$10.99
5/8"	16	0.938	232#	3.9	0.22	700	20836415	11.75
3/4"	19	1.125	232#	4.5	0.34	131	20836416	15.31
1"	25	1.438	232#	5.9	0.54	131	20836417	25.87
1 1/4"	32	1.875	232#	7.7	0.94	131	20836418	33.69
1 1/2"	38	2.188	232#	9.0	1.14	131	20836419	40.00
1 5/16"	40	2.250	232#	9.4	1.28	131	20836420	40.46
2"	50	2.750	232#	11.8	1.84	131	20836421	47.65
2 3/8"	60	3.125	232#	16.6	2.02	393	20836422	53.99
2 5/8"	65	3.500	232#	17.9	2.55	131	20836423	68.08
2 3/4"	70	3.688	232#	19.3	2.62	393	20836424	75.80
3"	75	3.875	232#	20.7	2.76	393	20836425	78.87
3 1/8"	80	4.250	232#	22.0	3.43	393	20836426	92.40
4"	100	5.125	232#	27.6	4.50	262	20836427	133.22

Product Code: 500-002

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Corrugated



TUDERTECHNICA

Tudertecnica Glidetech® Butyl Hose

Service/Application:

A premium grade low permeation extra flexible suction and delivery hose suitable for wine and spirits. Chemical, oil, abrasion resistant, non-marking and easy to clean cover. Phthalates free.

Temperature Range:

-40°F to 248°F (-40°C to 120°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a steel wire helix. Red, corrugated rubber (wrapped impression) cover with UHMW non-marking cover. Available in 250 PSI. (1541HD)

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.220	150#	26.6	2.36	0.49	130	1541-0750	\$ 29.00	\$ 270.36
1"	1.460	150#	26.6	2.76	0.55	130	1541-1000	32.20	364.20
1½"	2.030	150#	26.6	3.15	0.82	130	1541-1500	38.85	356.34
2"	2.600	150#	26.6	3.94	1.27	130	1541-2000	46.90	506.26
2½"	3.090	150#	26.6	5.12	1.54	130	1541-2500	54.61	776.28
3"	3.620	150#	26.6	5.91	1.94	130	1541-3000	74.17	824.26
4"	4.650	150#	26.6	9.84	2.53	130	1541-4000	80.75	1,301.96

Product Code: 8103

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



Continental
contTech

Continental ExtremeFlex™ EZ Clean Cover Hose

Service/Application:

Flexible hose for beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Temperature Range:

-30°F to 220°F (-34°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a steel wire helix. Red, corrugated UHMWPE EZ-Clean semi-smooth cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1"	1.520	250#	29.0	2.0	0.65	100	1542-1000	\$ 28.42	364.20
1½"	2.030	250#	29.0	3.0	0.93	100	1542-1500	34.12	356.34
2"	2.537	250#	29.0	4.0	1.21	100	1542-2000	41.23	506.26
3"	3.601	200#	29.0	6.0	2.03	*100	1542-3000	65.17	824.26
4"	4.607	150#	29.0	8.0	2.77	**100	1542-4000	78.86	1,301.96

Product Code: 549-605

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
*100 FT. MINIMUM REQUIRED - **400 FT. MINIMUM REQUIRED



Food & Beverage Hose - Corrugated



Continental EZ Glide Wine™ Transfer Hose

Service/Application:

A high quality liquid transfer hose designed specifically for the highly demanding service of transferring non-oily liquid food products. Suitable for wine, beer, juice, potable water and other beverages.

Temperature Range:

-20°F to 180°F (-29°C to 82°C)
Max 200°F (93°C) for cleaning purposes only

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) rubber tube reinforced with synthetic fabric plies. Gray, EPDM synthetic rubber (wrapped impression) cover with Green outer helix. . Non-phthalates compound.

S/S Tri-Clamp
w/ Bumpers
(Add-On)

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	List Price (both ends)
1½"	2.060	150#	20.0	3.0	0.93	100	EZGW-1500	\$ 38.88	\$ 429.26
2"	2.590	150#	20.0	3.0	1.22	*100	EZGW-2000	47.04	559.78
3"	3.610	150#	20.0	5.0	1.85	*100	EZGW-3000	74.03	1,129.72

Product Code: 549-646

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES (BUILT-IN RUBBER BUMPERS)
*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



Kanaflex FW Braided Suction/Transfer Hose

Service/Application:

A heavy-duty clear reinforced FDA and 3-A non-toxic suction and discharge hose for bottling, wine making, canning, dairy, brewing and liquid foods. Not for use in oily applications.

Temperature Range:

-13°F to 140°F (-25°C to 60°C)

Construction:

Smooth, clear flexible (FDA, 3-A, USDA compliant, NSF-51) PVC material with synthetic braiding. White, corrugated PVC rigid outer helix.

S/S Tri-Clamp
(Add-On)

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	List Price (both ends)
1½"	2.100	110#	28.0	2.5	0.56	100	1580-1500	\$ 9.16	\$ 356.34
2"	2.600	100#	28.0	4.0	0.75	100	1580-2000	11.50	506.26
3"	3.700	100#	28.0	6.3	1.20	100	1580-3000	15.38	1,023.30
4"	4.800	75#	28.0	7.1	1.74	100	1580-4000	24.82	POR
6"	7.300	70#	28.0	10.2	3.88	100	1580-6000	55.51	2,612.82

Product Code: 1580

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Corrugated



Tudertecnica Glidete[®] Distillery Hose

Service/Application:

Extra flexible suction and delivery hose suitable for distilled and distillation by-products with alcohol concentration up to 96%. Phthalates free. Resistant to most oily food products. Please consult us for compatibility.

Temperature Range:

-31°F to +212°F (-35°C to 100°C)

Construction:

Translucent UHMW (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a steel wire helix. Green, corrugated rubber cover with UHMW non-marking and easy to clean cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.220	150#	26.6	3.15	0.48	130	1546-0750	\$ 33.30	\$ 270.36
1"	1.460	150#	26.6	3.94	0.54	130	1546-1000	37.00	364.20
1½"	1.970	150#	26.6	5.91	0.76	130	1546-1500	44.66	356.34
2"	2.560	150#	26.6	7.87	1.21	130	1546-2000	53.90	506.26
2½"	3.050	150#	26.6	10.24	1.47	130	1546-2500	66.64	776.28
3"	3.580	150#	26.6	13.78	1.88	130	1546-3000	85.33	824.26
4"	4.610	150#	26.6	19.69	2.45	*130	1546-4000	92.86	1,301.96

Product Code: 8206

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.

*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS

Continental Plicord[®] Distillery 150

Service/Application:

Extra flexible suction and delivery hose suitable for distilled and distillation by-products with alcohol concentration up to 96%. Phthalates free.

Temperature Range:

-40°F to 212°F (-40°C to 100°C)

Construction:

UHMWPE (FDA/USDA AND 3-A compliant) NSF-61 tube reinforced with fabric plies and a steel wire helix. Gray, corrugated EPDM rubber (wrapped impression).



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1"	1.450	150#	29.0	4.0	0.57	100	20866181	\$ 38.22
1½"	1.980	150#	29.0	5.0	0.87	100	20866182	44.18
2"	2.530	150#	29.0	6.0	1.02	100	20866183	51.30
3"	3.560	150#	29.0	9.0	1.93	100	20866184	79.20
4"	4.580	150#	29.0	12.0	2.63	100	20866185	101.05

Product Code: 549-683

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



Food & Beverage Hose - Corrugated



Tudertecnica Glidetechn® Nitrile Hose

Service/Application:

Extra flexible, lightweight suction and delivery hose suitable for fatty and non-fatty food products.

Temperature Range:

-13°F to +176°F (-25°C to +80°C)

Construction:

White, Nitrile (NBR), phthalates free, (FDA/3-A Sanitary Standard Class II) tube reinforced with fabric plies and a galvanized wire helix. Gray, corrugated rubber cover with UHMW non-marking and easy to clean cover. Available with Blue Cover - special order.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.220	150#	26.6	2.0	0.42	130	1533G-0750	\$ 23.70	\$ 270.36
1"	1.460	150#	26.6	2.8	0.54	130	1533G-1000	26.13	364.20
1¼"	1.730	150#	26.6	3.0	0.69	*130	1533G-1250	29.69	406.30
1½"	2.030	150#	26.6	3.2	0.82	130	1533G-1500	33.16	356.34
2"	2.600	150#	26.6	3.9	1.27	130	1533G-2000	41.09	506.26
2½"	3.090	150#	26.6	5.1	1.55	*130	1533G-2500	57.67	776.28
3"	3.620	150#	26.6	5.9	1.95	130	1533G-3000	61.75	824.26
4"	4.650	150#	26.6	9.8	2.55	*130	1533G-4000	73.63	1,301.96

Product Code: 1533G (Gray Cover)

Product Code: 8301 (Optional Blue Cover)

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS

Novaflex 6230WG Natural Rubber Food Hose

Service/Application:

An extremely flexibility and rugged natural rubber food hose for non-oily food products. Ideal for milk collection. The food grade tube is odorless and tasteless.

Temperature Range:

-40°F to 150°F (-40°C to 71°C)

Construction:

White FDA natural rubber tube reinforced with multiple fabric plies and steel wire helix. Blue, EPDM corrugated (wrapped impression) rubber cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1½"	2.010	150#	29.0	2.0	0.86	100	6230WG-01500-00	\$ 32.23
2"	2.510	150#	29.0	3.0	1.10	100	6230WG-02000-00	37.34
2½"	3.010	150#	29.0	4.0	1.42	100	6230WG-02500-00	43.08
3"	3.520	150#	29.0	5.0	1.69	100	6230WG-03000-00	49.59
4"	4.580	150#	29.0	6.5	2.81	100	6230WG-04000-00	66.46

Product Code: 6230WG

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Corrugated

Continental

Plicord® ExtremeFlex™ Beverage Hose

Service/Application:

Flexible hose for beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections.

Temperature Range:

-30°F to 220°F (-34°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a steel wire helix. Gray, corrugated EPDM synthetic rubber (wrapped impression) cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1"	1.560	250#	29.0	1.5	0.73	*100	1547-1000	\$ 27.62
1½"	2.020	250#	29.0	2.3	0.92	100	1547-1500	33.32
2"	2.530	250#	29.0	3.0	1.20	100	1547-2000	40.25
3"	3.590	200#	29.0	4.5	2.02	100	1547-3000	63.60
4"	4.600	150#	29.0	6.0	2.76	*100	1547-4000	76.97

Product Code: 549-603

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS
* 400 FT. MINIMUM REQUIRED



Continental

Plicord® ExtremeFlex™ Beverage Hose

Service/Application:

Flexible hose for beer, wine, distillery and beverage (edible liquid) transfer processing facilities. Ideal for applications requiring flexible and/or tight bend connections. Microban cover prohibits the growth of bacteria.

Temperature Range:

-30°F to 220°F (-30°C to 104°C)

Construction:

White Chlorobutyl (FDA/USDA/3-A Sanitary Standard 18-03) tube reinforced with fabric plies and a steel wire helix. Red, corrugated EPDM synthetic rubber (wrapped impression) Microban cover w/ Blue line.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1"	1.560	250#	29.0	1.5	0.73	100	1548-1000	\$ 28.98
1½"	2.020	250#	29.0	2.3	0.92	100	1548-1500	34.83
2"	2.530	250#	29.0	3.0	1.20	*100	1548-2000	42.07
3"	3.590	200#	29.0	4.5	2.02	*100	1548-3000	66.47

Product Code: 549-004

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS
* 400 FT. MINIMUM REQUIRED



Food & Beverage Hose - Corrugated



Novaflex 6433WU UHMW Food Hose

Service/Application:

Food transfer applications that demands extra flexibility and ruggedness. This food grade tube is odorless and tasteless for all those all purpose transfer applications.

Temperature Range:

-40°F to 225°F (-40°C to 116°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White FDA UHMW tube reinforced with multiple fabric plies and steel wire helix. Gray, corrugated EPDM (wrapped impression) rubber cover. Available with UHMW Cover (Series 6433WUU).

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1½"	2.030	200#	29.0	2.0	0.91	100	6433WU-01500-00	\$ 25.90	\$ 356.34
2"	2.530	200#	29.0	3.0	1.16	100	6433WU-02000-00	31.01	506.26
3"	3.740	200#	29.0	5.0	2.48	100	6433WU-03000-00	46.94	824.26
4"	4.760	200#	29.0	6.5	3.31	100	6230WG-04000-00	63.56	1,301.96

Product Code: 6433WU

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS MOST SIZES

Novaflex 6314WT Corrugated Nitrile Food Hose

Service/Application:

Extremely flexible, corrugated hose with pretzel-like agility for conveying oily food products and beverages under vacuum or low pressure discharge where maximum flexibility is required.

Temperature Range:

-40°F to 210°F (-40°C to 99°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and helix wire. Gray, corrugated Nitrile/PVC (wrapped impression) rubber cover. Available with abrasion resistant Nova-Glide easy clean UHMW cover (Part No. 6314WTU).



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1½"	2.050	150#	29.0	2.0	1.04	100	6314WT-01500-00	\$ 30.84
2"	2.550	150#	29.0	3.0	1.34	100	6314WT-02000-00	38.89
2½"	3.050	150#	29.0	4.0	1.60	100	6314WT-02500-00	51.45
3"	3.750	150#	29.0	5.0	2.78	100	6314WT-03000-00	69.94
4"	4.760	150#	29.0	6.5	3.82	100	6314WT-04000-00	80.22

Product Code: 6314WT

Product Code: 6314WTU (Nova-Glide UHMW Cover)

CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS MOST SIZES



800-852-1855



www.abbottrubber.com

Food & Beverage Hose - Corrugated

Continental ExtremeFlex™ White Food Hose



Service/Application:

Extremely flexible, corrugated hose with pretzel-like agility for conveying oily food products and beverages under vacuum or low pressure discharge where maximum flexibility is required.

Temperature Range:

-25°F to 212°F (-32°C to 100°C)

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a steel wire helix. White, corrugated Nitrile/PVC (wrapped impression) rubber cover. Conforms to 3-A Sanitary Standard 18-03.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
2"	2.440	150#	29.0	2.0	1.05	*100	1534-2000	\$ 54.53
3"	3.560	150#	29.0	3.0	2.07	*100	1534-3000	85.19
4"	4.590	150#	29.0	4.0	2.92	*100	1534-4000	117.32

Product Code: 549-462

CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS

Continental ExtremeFlex™ Gray Food Hose



Service/Application:

Extremely flexible, corrugated hose with pretzel-like agility for conveying oily food products and beverages under vacuum or low pressure discharge where maximum flexibility is required.

Temperature Range:

-25°F to 212°F (-32°C to 100°C)

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a steel wire helix. Gray, corrugated Nitrile/PVC (wrapped impression) rubber cover. Conforms to 3-A Sanitary Standard 18-03.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
2"	2.440	150#	29.0	2.0	1.05	*100	1533-2000	\$ 54.53
3"	3.560	150#	29.0	3.0	2.07	*100	1533-3000	85.19
4"	4.590	150#	29.0	4.0	2.92	*100	1533-4000	117.32

Product Code: 549-164 (Gray)

CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS





Continental White Flexwing® Food Hose

Service/Application:

Flexible hose for conveying oily food products and beverages under vacuum or low pressure discharge where wire is needed to prevent collapsing under vacuum or small bending radius.

Temperature Range:

-25°F to 230°F (-32°C to 110°C)

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a galvanized wire helix. White, Nitrile/PVC (wrapped impression) rubber cover. Conforms to 3-A Sanitary Standard 18-03.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On)
3/4"	1.200	150#	29.0	2.0	0.47	100	1530-0750	\$ 17.98	\$ 270.36
1"	1.440	150#	29.0	3.0	0.57	100	1530-1000	17.30	364.20
1¼"	1.700	150#	29.0	4.0	0.69	100	1530-1250	20.44	*406.30
1½"	1.970	150#	29.0	4.0	0.86	100	1530-1500	22.60	356.34
2"	2.530	150#	29.0	5.0	1.23	100	1530-2000	28.72	506.26
3"	3.600	150#	29.0	7.0	2.16	100	1530-3000	40.30	824.26
4"	4.640	150#	29.0	10.0	3.05	100	1530-4000	52.12	1,301.96

Product Code: 549-151

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
 *1-1/4" ID ASSEMBLED WITH 1-1/2" TRI-CLAMP ENDS - INTERNAL EXPANDED
 CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
 LESS 10% FULL COILS



Continental Gray Plicord® Food Hose

Service/Application:

Flexible hose for conveying oily food products and beverages under vacuum or low pressure discharge where wire is needed to prevent collapsing under vacuum or small bending radius.

Temperature Range:

-25°F to 230°F (-32°C to 110°C)

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and a galvanized wire helix. Gray, Nitrile/PVC (wrapped impression) rubber cover. Conforms to 3-A Sanitary Standard 18-03.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On)
3/4"	1.200	150#	29.0	2.0	0.47	*100	1535-0750	\$ 16.20	\$ 270.36
1"	1.450	150#	29.0	3.0	0.58	100	1535-1000	16.88	364.20
1½"	1.970	150#	29.0	4.0	0.85	100	1535-1500	22.82	356.34
2"	2.590	150#	29.0	5.0	1.42	100	1535-2000	29.62	506.26
3"	3.590	150#	29.0	7.0	2.10	100	1535-3000	33.12	824.26
4"	4.680	150#	29.0	10.0	3.19	100	1535-4000	48.24	1,301.96

Product Code: 549-834

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
 CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
 LESS 10% FULL COILS - *AVAILABLE IN STANDARD LENGTHS ONLY



Novaflex 6300WT Nitrile Food Hose

Service/Application:

Recommended for transfer of oily food products and beverages under vacuum or low pressure discharge where maximum flexibility is required.

Temperature Range:

-40°F to 210°F (-40°C to 99°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Nitrile FDA/USDA/3-A sanitary tube reinforced with fabric plies and helix wire. Gray, smooth, Nitrile/PVC (wrapped impression) rubber cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
3/4"	1.290	150#	29.0	4.0	0.40	100	6300WT-00750-00	\$ 19.67
1"	1.540	150#	29.0	5.0	0.50	100	6300WT-01000-00	20.75
1½"	2.050	150#	29.0	6.0	0.71	100	6300WT-01500-00	25.16
2"	2.550	150#	29.0	7.0	0.95	100	6300WT-02000-00	28.28
2½"	3.140	150#	29.0	8.0	1.19	100	6300WT-02500-00	37.41
3"	3.760	150#	29.0	9.0	1.51	100	6300WT-03000-00	47.70
4"	4.760	150#	29.0	12.0	1.98	100	6314WT-04000-00	56.66

Product Code: 6300WT

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
LESS 10% FULL COILS MOST SIZES

Novaflex 6285WN Potable Water Suction Hose

Service/Application:

Flexible hose for potable water applications that require high pressure or suction. Used for filling or temporary water supply lines.

Temperature Range:

-30°F to 180°F (-34°C to 82°C)

Construction:

White FDA Neoprene tube reinforced with multiple fabric plies and a steel wire helix. Blue, Smooth EPDM (wrapped impression) cover.




Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1"	1.540	250#	29.0	0.57	100	6285WN-01000-00	\$ 17.08
1½"	2.050	250#	29.0	0.93	100	6285WN-01500-00	19.85
2"	2.550	200#	29.0	1.31	100	6285WN-02000-00	27.79
2½"	3.050	150#	29.0	1.58	100	6285WN-02500-00	31.78
3"	3.650	145#	29.0	1.88	100	6285WN-03000-00	38.89
4"	4.740	125#	29.0	2.80	100	6285WN-04000-00	53.52

Product Code: 6285WN

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
LESS 10% FULL COILS



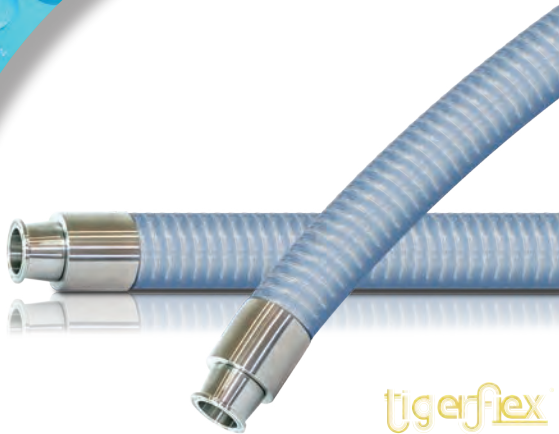

tigerflex

Tigerflex FT FDA/USDA/3-A Suction/Transfer Hose

Service/Application:

High quality hose for food grade liquids such as potable water, beer, cider, wine and juice. Ideal for transferring ice, milk and other dairy products. Not recommended for oily products.

Temperature Range:

-4°F to 150°F (-20°C to 65°C)

Construction:

Clear flexible (FDA, 3-A, USDA compliant) PVC material with clear PVC rigid Helix. Phthalate free. Approved by the USDA for meat and poultry plants.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	0.940	115#	29.0	3.0	0.17	100	1550-0750	\$ 4.50	\$ 184.50
1"	1.280	100#	29.0	3.0	0.24	100	1550-1000	4.52	364.20
1¼"	1.560	90#	29.0	4.0	0.44	100	1550-1250	5.65	406.30
1½"	1.800	85#	29.0	6.0	0.50	100	1550-1500	6.08	394.30
2"	2.360	85#	29.0	8.0	0.71	100	1550-2000	9.28	501.48
2½"	2.880	65#	29.0	10.0	0.94	100	1550-2500	13.48	685.18
3"	3.420	55#	29.0	11.0	1.14	100	1550-3000	15.34	824.26
4"	4.510	50#	29.0	18.0	1.91	100/60	1550-4000	26.96	1,301.96
5"	5.510	40#	29.0	28.0	2.41	100/20	1550-5000	33.78	-----
6"	6.590	30#	29.0	48.0	3.28	20	1550-6000	50.56	2,612.82
8"	8.850	25#	29.0	60.0	5.67	20	1550-8000	83.70	-----

Product Code: FT

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL COILS



CUSTOM-MADE HOSES AND FITTINGS ASSEMBLED TO NAHAD'S HOSE SAFETY INSTITUTE'S GUIDELINES.

ABBOTTRUBBER
COMPANY, INC.



800-852-1855



www.abbottrubber.com



Novaflex 6403CU UHMW FDA Beverage Hose

Service/Application:

Food transfer applications that demands extra flexibility and ruggedness. This food grade tube is odorless and tasteless for all those all purpose transfer applications.

Temperature Range:

-40°F to 225°F (-40°C to 116°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White FDA UHMW tube reinforced with multiple fabric plies and steel wire helix. Gray, smooth EPDM (wrapped impression) rubber cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
3/4"	1.280	200#	29.0	3.5	0.58	100	6403CU-00750-00	\$ 20.20	\$ 270.36
1"	1.550	200#	29.0	3.5	0.63	100	6403CU-01000-00	22.30	364.20
1½"	2.060	200#	29.0	5.0	1.06	100	6403CU-01500-00	23.80	356.34
2"	2.560	200#	29.0	8.0	1.33	100	6403CU-02000-00	28.88	506.26
3"	3.750	200#	29.0	12.0	2.12	100	6403CU-03000-00	43.44	824.26
4"	4.760	200#	29.0	16.0	2.83	100	6403CU-04000-00	60.55	1,301.96

Product Code: 6403CU

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
LESS 10% FULL COILS MOST SIZES



Novaflex 6500WB Food & Beverage Hose

Service/Application:

A rugged transfer hose for transfer of wine, beer, potable water and other non-oily, liquid food products.

Temperature Range:

-40°F to 240°F (-40°C to 116°C)
CIP to 248°F (120°C), not for continuous steam service

Construction:

White Chlorobutyl (FDA/USDA/3-A Cert# 1376) tube reinforced with multiple plies of polyester tire cord and steel wire helix. Gray, EPDM synthetic rubber (wrapped impression) cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	S/S Tri-Clamp (Add-On) List Price (both ends)
1/2"	1.000	150#	29.0	3.0	0.25	100	6500WB-00500-00	\$ 19.04	\$ 157.26
3/4"	1.290	150#	29.0	4.0	0.40	100	6500WB-00750-00	20.93	270.36
1"	1.540	150#	29.0	5.0	0.50	100	6500WB-01000-00	22.82	364.20
1½"	2.050	150#	29.0	6.0	0.71	100	6500WB-01500-00	28.74	356.34
2"	2.550	150#	29.0	7.0	0.95	100	6500WB-02000-00	36.40	506.26
2½"	3.140	150#	29.0	8.0	1.19	100	6500WB-02500-00	40.25	776.28
3"	3.670	150#	29.0	12.0	1.51	100	6500WB-03000-00	48.16	824.26
4"	4.670	150#	29.0	16.0	1.98	*100	6500WB-04000-00	62.13	1,301.96

Product Code: 6500WB

ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 FITTINGS ALSO AVAILABLE
LESS 10% FULL COILS MOST SIZES - *MINIMUM ORDER REQUIRED



High-Temp Silicone Hose



Tudertechnica Tusil® Bright Silicone Vacuum Hose

Service/Application:

A suction and delivery hose suitable for cosmetic, pharmaceutical and food products where low and high temperatures are required. Not suitable for blood or human fluids. FDA/3-A/USP Class XXXII and phthalates free.

Temperature Range:

-76°F to 392°F (-60°C to 200°C)

Construction:

Translucent FDA/3-A/USP Class XXXII silicone tube, reinforced with high temperature resistant plies and stainless steel helix. Smooth, silicone, translucent, heat, ageing, ozone and abrasion resistant glossy cover.

S/S Tri-Clamp
(Add-On)

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	List Price (both ends)
1/2"	0.940	250#	26.5	2.36	0.31	*130	1575-0500	\$ 42.90	\$ POR
5/8"	1.060	210#	26.5	2.76	0.36	*130	1575-0625	POR	POR
3/4"	1.180	195#	26.5	3.15	0.40	130	1575-0750	53.75	270.36
1"	1.420	150#	26.5	3.94	0.49	130	1575-1000	68.25	366.42
1¼"	1.690	120#	26.5	5.12	0.60	*130	1575-1250	85.50	POR
1½"	2.000	105#	26.5	6.10	0.81	130	1575-1500	97.75	373.76
2"	2.520	90#	26.5	8.27	1.05	*130	1575-2000	120.25	498.60
2½"	3.090	75#	26.5	10.24	1.55	*130	1575-2500	145.50	POR
3"	3.580	60#	26.5	12.20	1.82	*130	1575-3000	160.50	991.74
4"	4.610	45#	26.5	16.54	2.38	*130	1575-4000	225.50	POR

Product Code: TUSIL-BRIGHT

MOST ASSEMBLIES INCLUDE 304 STAINLESS STEEL FITTINGS & FERRULES - 316 STAINLESS STEEL (3/4" ONLY)
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.

*AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



FDA Braided Silicone Tubing

Service/Application:

Kink resistant FDA tubing designed for food and beverage machinery. Conveys liquids under pressure at high or low operating temperatures.

Temperature Range:

-65°F to 350°F (-54°C to 177°C)

Construction:

White translucent FDA and NSF-51 silicone tube reinforced with braided polyester. Translucent silicone cover. Platinum cured.

Hose I.D.	Hose O.D.	W/P @ 70°F	Fabric Braids	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
3/16"	.447	200#	1	0.07	100	4075-0187	\$ 4.50
1/4"	.520	200#	1	0.09	100	4075-0250	5.20
5/16"	.592	175#	1	0.11	100	4075-0312	6.78
3/8"	.655	150#	1	0.13	100	4075-0375	7.94
1/2"	.800	125#	1	0.17	100	4075-0500	9.15
5/8"	.965	100#	1	0.23	50	4075-0625	11.24
3/4"	1.100	75#	1	0.28	50	4075-0750	13.40
1"	1.380	75#	1	0.36	50	4075-1000	17.80

Product Code: 4075

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



800-852-1855



www.abbottrubber.com

Dry Foods Handling Hose

Alfagomma T720LG Dry Foods Handling Hose



Service/Application:

A smooth bore suction and discharge hose designed for abrasives such as grains, flour and pellet transfer. Suitable for wet or dry.

Temperature Range:

-20°F to 180°F (-29°C to 82°C)

Construction:

3/16" thick White, FDA grade, natural rubber tube. Reinforced with a high tensile steel wire helix and textile cords. Green SBR/EPDM abrasion and ozone resistant cover. Available with corrugated cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
2"	2.640	150#	30.0	6.0	1.22	100	1650-2000	\$ 23.65
2½"	3.400	150#	29.0	8.0	3.10	100	1650-2500	35.18
3"	3.620	150#	27.0	9.0	1.88	100	1650-3000	33.65
4"	4.650	150#	24.0	12.0	2.56	50/100	1650-4000	44.10
5"	5.710	75#	24.0	20.0	3.79	20/50	1650-5000	66.12
6"	6.690	75#	24.0	24.0	4.66	20/50	1650-6000	77.86
8"	8.780	75#	21.0	32.0	7.01	20	1650-8000	127.42

Product Code: T720LG

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
LESS 10% FULL COILS

Novaflex 6201WG Dry Foods Discharge Hose



Service/Application:

Designed for the transfer of dry edible food products such as sugar, flour, beans, grains etc. Ultra smooth microbe resistant FDA tube.

Temperature Range:

Up to 160°F (71°C)

Construction:

3/16" thick white, FDA grade, natural rubber tube. Reinforced multiple plies of polyester cord with static wire. Gray SBR (wrapped impression) abrasion and weather resistant cover.



Hose I.D.	Hose O.D.	W/P @ 70°F	Ply	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
3"	3.700	100#	2	1.95	100	6201WG-03000-00	\$ 46.24
4"	4.700	100#	2	2.50	100	6201WG-04000-00	60.34
5"	5.710	100#	2	3.35	100	6201WG-05000-00	104.48

Product Code: 6201WG

CUSTOM MADE ASSEMBLIES ARE AVAILABLE FOR THIS HOSE
AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS

ABBOTTRUBBER
COMPANY, INC.



Norres

350AS Anti-Static FDA Flexible Hose



Service/Application:

Extremely flexible, light-weight, abrasion resistant material handling hose. Used in food industry, pharmaceutical industry (FDA, EU guideline). Vacuum conveying devices, vacuum hoppers, suction conveyors, dosing systems, pelleting machines/ tablet presses. Oil resistant.

Temperature Range:

-40°F to 195°F (-40°C to 90°C) short time to 255°F (124°C)

Construction:

Translucent, flexible, permanently anti-static, microbe resistant and highly abrasion resistant FDA smooth bore material with a spiral copper wire embedded in wall. Convoluted, abrasion resistant urethane cover for flexibility.


Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1½"	1.750	26#	15.0	0.09	25/50	350ASF-24	\$ 6.72
2"	2.240	19#	13.0	0.11	25/50	350ASF-32	7.17
3"	3.200	13#	6.50	0.17	25/50	350ASF-48	9.10
4"	4.210	10#	3.40	0.26	25/50	350ASF-64	11.69

Product Code: 350ASF

OTHER SIZES AVAILABLE 1" ID TO 20" ID - ALSO AVAILABLE WITH STAINLESS STEEL WIRE HELIX

Tigerflex®

WT Clear PVC Food Handling Hose

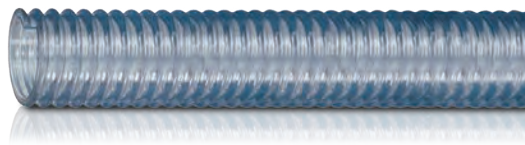

Service/Application:

Designed for bulk handling and conveying material such as resin, pellet, granular, or powder materials, as well as liquid, solid or semi-solid food products.

Temperature Range:

-5°F to 150°F (-20°C to 65°C)

Construction:

Clear, flexible, and highly abrasion FDA and 3-A PVC with a clear rigid spiral reinforcement. Smooth bore and convoluted cover for flexibility. Also available with copper static wire (Part No. 1611).



Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1"	1.300	55#	28.0	0.21	50/100	1610-1000	\$ 3.88
1¼"	1.600	50#	28.0	0.28	50/100	1610-1250	4.62
1½"	1.920	50#	28.0	0.35	50/100	1610-1500	5.42
45MM	2.090	45#	28.0	0.44	50	1610-1750	8.04
2"	2.400	40#	28.0	0.56	50/100	1610-2000	7.38
57MM	2.680	40#	28.0	0.64	50	1610-2250	10.65
2½"	2.990	40#	28.0	0.77	50/100	1610-2500	13.35
3"	3.640	40#	28.0	1.10	50/100	1610-3000	14.68
3½"	4.210	35#	28.0	1.48	50/100	1610-3500	24.80
4"	4.720	35#	24.0	1.80	50/100	1610-4000	25.45
5"	5.740	30#	24.0	2.34	20/50/100	1610-5000	42.82
6"	6.910	30#	24.0	3.70	20/50/100	1610-6000	48.48
8"	8.970	20#	20.0	5.53	20/50	1610-8000	67.92

Product Code: WT

LESS 10% FULL COILS SIZES 1" I.D. THRU 6" I.D. ONLY





FDA Grade Clear PVC Flexible Tubing

Service/Application:

Flexible FDA grade tubing suitable for use with foods and beverages. Handles a broad range of chemicals, gases, and liquids. Smooth inner wall allows excellent flow characteristics.

Temperature Range:

25°F to 150°F (-3°C to 65°C)

Construction:

Crystal clear 75 durometer polyvinyl chloride extrusion.

Hose I.D.	Wall (in.)	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/16"	.031	.125	65#	0.01	100	3010-0061	\$.10
1/8"	.062	.250	65#	0.02	100	3010-0131	.25
3/16"	.062	.312	55#	0.03	100	3010-0192	.19
1/4"	.062	.375	50#	0.04	100	3010-0252	.26
1/4"	.093	.437	60#	0.06	100	3010-0253	.36
1/4"	.125	.500	70#	0.08	100	3010-0254	.45
5/16"	.062	.437	40#	0.04	100	3010-0312	.30
5/16"	.093	.500	50#	0.07	100	3010-0313	.43
3/8"	.062	.500	35#	0.05	100	3010-0382	.31
3/8"	.093	.562	50#	0.07	100	3010-0383	.47
3/8"	.125	.625	60#	0.10	100	3010-0384	.70
7/16"	.062	.562	40#	0.05	100	3010-0442	.37
1/2"	.062	.625	30#	0.06	100	3010-0502	.42
1/2"	.093	.687	40#	0.11	100	3010-0503	.59
1/2"	.125	.750	45#	0.13	100	3010-0504	.83
5/8"	.125	.875	40#	0.16	100	3010-0634	1.05
3/4"	.125	1.000	35#	0.18	100	3010-0754	1.10
7/8"	.125	1.125	30#	0.21	100	3010-0884	1.26
1"	.125	1.250	25#	0.23	100	3010-1004	1.50
1 1/4"	.125	1.500	25#	0.29	50	3010-1254	1.98
1 1/4"	.187	1.625	35#	0.46	50	3010-1256	3.20
1 1/2"	.187	1.875	30#	0.35	50	3010-1506	3.54
1 1/2"	.250	2.000	35#	0.74	50	3010-1508	5.62
2"	.250	2.500	30#	0.96	50	3010-2008	6.40

Product Code: 3010

AVAILABLE IN STANDARD LENGTHS ONLY
LESS 5% FOR ORDERS OF 1,000 FT & OVER

ABBOTTRUBBER
COMPANY, INC.





Tygon® 2375 High-Purity Alcohol Transfer Tubing

Service/Application:

Ultra chemical resistant tubing offers unequaled combination of chemical resistance, clarity and flexibility. It is virtually unaffected by acids, bases, ketones, salts and alcohols. FDA 21 CFR 177.1520, REACH & RoHS compliant.

Temperature Range:

-103°F to 130°F (-75°C to 54°C)

Construction:

Clear, smooth, 75 durometer, non-DEHP & high-purity, plasticizer-free PVC.



Hose I.D.	Wall (in.)	Hose O.D.	W/P @ 73°F	Vacuum HG (in.)	Bend Radius (in.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/16"	1/32"	1/8"	40	29.9	0.250	50	AJK00002	\$ 2.06
1/16"	1/16"	3/16"	65	29.9	0.125	50	AJK00003	2.12
3/32"	1/32"	5/32"	25	29.9	0.250	50	AJK00004	2.09
1/8"	1/16"	1/4"	40	29.9	0.250	50	AJK00007	3.24
5/32"	1/32"	7/32"	20	29.9	0.250	50	AJK00009	2.62
3/16"	1/16"	5/16"	30	29.9	0.500	50	AJK00012	3.59
1/4"	1/16"	3/8"	25	29.9	0.750	50	AJK00017	4.02
5/16"	1/16"	7/16"	20	29.9	1.125	50	AJK00022	4.45
3/8"	1/16"	1/2"	17	29.0	1.500	50	AJK00027	5.07
3/8"	1/8"	5/8"	25	29.9	1.125	50	AJK00029	9.00
1/2"	1/8"	3/4"	25	29.9	1.500	50	AJK00038	11.25
5/8"	1/8"	7/8"	20	29.9	2.500	50	AJK00046	13.31
3/4"	1/8"	1"	17	20.0	2.750	50	AJK00053	14.37
1"	3/16"	1-3/8"	19	25.0	3.250	25	AJK2064	24.82

Product Code: 2375

AVAILABLE IN STANDARD LENGTHS ONLY

FDA Grade Flexible Polypropylene Tubing

Service/Application:

Durable and heat resistant tubing for hot liquids or gases. Meets FDA requirements.

Temperature Range:

25°F to 150°F (-3°C to 65°C)

Construction:

Clear 60 durometer polyvinyl chloride extrusion.



Hose I.D.	Wall (in.)	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
.170	.040	.250	149#	0.01	100	3080-0170	\$.22
1/8"	.062	.250	272#	0.02	100	3080-0132	.30
3/16"	.062	.312	196#	0.02	100	3080-0192	.32
1/4"	.062	.375	157#	0.02	100	3080-0252	.40
3/8"	.062	.500	112#	0.03	100	3080-0382	.58
1/2"	.062	.625	87#	0.04	100	3080-0502	.75
5/8"	.062	.750	71#	0.05	100	3080-0632	.90
3/4"	.125	1.000	110#	0.14	100	3080-0754	2.36
1"	.125	1.250	87#	0.18	100	3080-1004	3.04

Product Code: 3080


AVAILABLE IN STANDARD LENGTHS ONLY



800-852-1855



www.abbottrubber.com

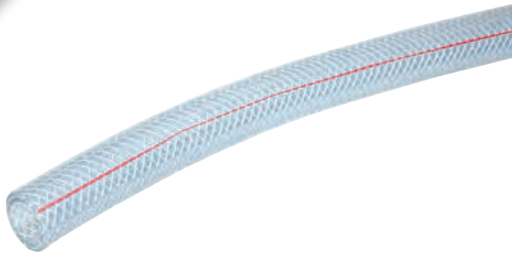

Regular Wall FDA Clear Braided PVC Tubing

Service/Application:

Flexible FDA grade tubing suitable for use with foods and beverages.
Handles a broad range of chemicals, gases, and liquids.

Temperature Range:


25°F to 150°F (-3°C to 65°C)

Construction:

Crystal clear 75 durometer polyvinyl chloride extrusion.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/8"	.325	250#	0.03	300	3020-0125	\$.62
3/16"	.375	250#	0.04	300	3020-0187	.66
1/4"	.437	250#	0.06	300	3020-0250	.68
5/16"	.531	250#	0.08	300	3020-0312	.84
3/8"	.593	225#	0.09	300	3020-0375	.86
1/2"	.750	200#	0.13	300	3020-0500	1.28
5/8"	.875	200#	0.18	300	3020-0625	1.55
3/4"	1.031	150#	0.22	300	3020-0750	1.88
1"	1.312	125#	0.30	300	3020-1000	2.60
1¼"	1.687	100#	0.45	100	3020-1250	4.58
1½"	1.937	100#	0.64	100	3020-1500	5.70
2"	2.500	75#	0.94	100	3020-2000	8.26

Product Code: 3020

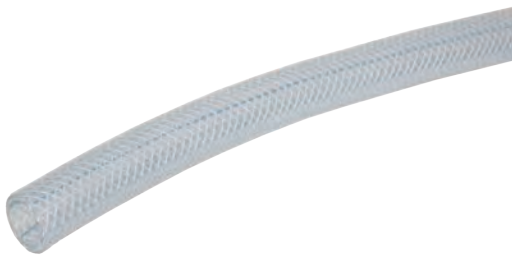

Kuritech K3130 Heavy Wall FDA Clear Braided PVC Tubing

Service/Application:

A high pressure, non-marking, flexible heavy wall clear reinforced tubing for a wide variety of applications including food, beverage, air and liquids. In compliance with FDA, NSF-51 and USDA 3A.

Temperature Range:

25°F to 150°F (-3°C to 65°C)

Construction:

Heavy wall clear reinforced PVC with Blue tint reinforced with spiral polyester.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/8"	.328	350#	0.04	300	3030-0125	\$.84
3/16"	.406	350#	0.06	300	3030-0187	.90
1/4"	.500	350#	0.08	300	3030-0250	1.14
5/16"	.563	275#	0.09	300	3030-0312	1.45
3/8"	.625	275#	0.11	300	3030-0375	1.58
1/2"	.813	250#	0.17	300	3030-0500	2.44
5/8"	1.000	225#	0.26	200	3030-0625	3.94
3/4"	1.125	200#	0.30	200	3030-0750	4.48
1"	1.375	150#	0.38	200	3030-1000	5.60
1¼"	1.750	125#	0.64	100	3030-1250	9.55
1½"	2.000	100#	0.96	100	3030-1500	11.02

Product Code: K3130

LESS 15% FULL COILS
LESS 5% FOR ORDERS OF 1,000 FT & OVER





Upgrade to 303 Stainless Steel GHT Fittings



High Purity PVC Potable Water Hose - NSF-51/ NSF-61

Service/Application:

High quality, non-toxic and flexible PVC hose for potable water, deionized water and temporary residential water supply lines. NSF-51 compliant. Phthalate Free, non conductive and RoHS compliant.

Temperature Range:

25°F to 150°F (-3°C to 65°C)


Construction:

Clear PVC FDA tube with high-strength polyester reinforcement. Dark Gray PVC non-marking cover. Also available with White cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)	Lead-Free Brass GHT Male x Female	303 Stainless GHT Male x Female
							List Price (Add-On)	List Price (Add-On)
3/8"	0.625	225#	0.09	300	3025-0375	\$ 1.44	\$ 45.65	\$ -----
1/2"	0.750	200#	0.13	300	3025-0500	2.14	45.65	-----
3/4"	1.000	150#	0.21	300	3025-0750	2.86	45.65	96.08
1"	1.312	125#	0.29	100	3025-1000	4.45	-----	-----
1 1/4"	1.687	100#	0.52	100	3025-1250	7.72	POR	POR
1 1/2"	1.937	100#	0.62	100	3025-1500	9.02	POR	POR
2"	2.500	75#	0.87	100	3025-2000	11.60	POR	POR

Product Code: 5000 & K6158

ASSEMBLIES INCLUDE LEAD-FREE GHT BRASS OR 303 STAINLESS STEEL FITTINGS & 304 STAINLESS STEEL FERRULES (MOST SIZES) CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE. LESS 10% FULL REELS ONLY

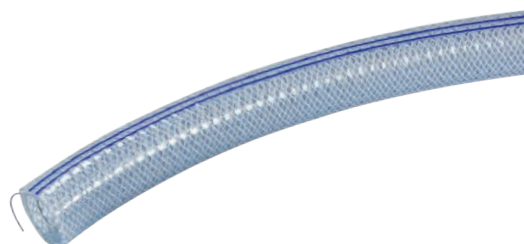

Clear Braided and Wire Inserted FDA PVC Vacuum Tubing

Service/Application:

Clear fabric and wire-reinforced construction handles higher pressure and full vacuum. Used to transport various chemicals and other liquids in areas with tight turns and sharp bends. FDA, NSF-51 and USDA 3A compliant.

Temperature Range:

15°F to 150°F (-9°C to 65°C)

Construction:

Clear PVC with a spring steel wire and fabric within the wall. Smooth outer cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/2"	0.906	250#	29.0	2.0	0.26	25/50/100	3046-0500	\$ 4.87
3/4"	1.196	225#	29.0	2.5	0.40	25/50/100	3046-0750	8.05
1"	1.464	225#	29.0	3.5	0.53	25/50/100	3046-1000	10.08
1 1/4"	1.780	175#	29.0	4.5	0.74	25/50	3046-1250	16.19
1 1/2"	2.030	175#	29.0	5.5	0.86	25/50	3046-1500	19.18
2"	2.600	175#	29.0	7.0	1.28	25/50	3046-2000	26.82

Product Code: K7300

AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS ADD LENGTH AT END OF PART NO. WHEN ORDERING (EXAMPLE: 3046-0500-25)





KuriTech - Poly-Spring Wire-Inserted PVC Vacuum Tubing

Service/Application:

Clear wire-reinforced construction handles pressure and full vacuum. Used to transport various chemicals and other liquids in areas with tight turns and sharp bends. FDA, NSF-51 and USDA 3A compliant.

Temperature Range:

25°F to 150°F (-3°C to 65°C)

Construction:

Clear PVC with a spring steel wire within the wall. Convoluted outer cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/4"	.460	150#	29.0	1.0	0.07	100	3045-0250	\$ 1.08
3/8"	.600	100#	29.0	1.5	0.11	100	3045-0375	1.68
1/2"	.750	100#	29.0	2.0	0.15	100	3045-0500	2.22
5/8"	.891	100#	29.0	2.5	0.19	100	3045-0625	2.64
3/4"	1.031	70#	29.0	3.0	0.24	100	3045-0750	3.60
1"	1.297	70#	29.0	4.0	0.33	100	3045-1000	4.64
1 1/4"	1.609	70#	29.0	5.0	0.50	25/50	3045-1250	7.05
1 1/2"	1.860	50#	29.0	6.0	0.58	25/50	3045-1500	8.20
2"	2.391	50#	29.0	8.0	0.84	25/50	3045-2000	11.86
2 1/4"	2.750	50#	29.0	9.0	1.16	25/50	3045-2250	19.36
2 1/2"	3.000	50#	29.0	10.0	1.28	25/50	3045-2500	23.65
3"	3.500	50#	29.0	12.0	1.62	25/50	3045-3000	27.42

Product Code: K7160

AVAILABLE IN STANDARD LENGTHS ONLY - CONTACT US FOR NON-STANDARD LENGTH REQUIREMENTS



KuriTech - Poly-Wire Wire-Inserted PVC Vacuum Tubing

Service/Application:

Clear wire-reinforced construction handles higher pressure and full vacuum. Used to transport various chemicals and other liquids in areas with tight turns and sharp bends. FDA, NSF-51 and USDA 3A compliant.

Temperature Range:

25°F to 150°F (-3°C to 65°C)

Construction:

Clear PVC with a spring steel wire within the wall. Smooth outer cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Vacuum HG (in.)	Bend Radius (in.)	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	List Price (ft.)
1/4"	.500	250#	29.0	1.0	0.10	100	3040-0250	\$ 1.56
3/8"	.625	150#	29.0	1.5	0.13	100	3040-0375	2.18
1/2"	.813	150#	29.0	2.0	0.21	100	3040-0500	3.44
5/8"	1.000	150#	29.0	2.5	0.30	100	3040-0625	5.40
3/4"	1.125	150#	29.0	3.0	0.36	100	3040-0750	6.20
1"	1.375	100#	29.0	4.0	0.44	100	3040-1000	7.75
1 1/4"	1.750	100#	29.0	5.0	0.74	25/50	3040-1250	13.00
1 1/2"	2.000	100#	29.0	6.8	0.84	25/50	3040-1500	15.62
2"	2.500	100#	29.0	8.0	1.12	25/50	3040-2000	21.80

Product Code: K7130

LESS 15% FULL COILS



Hot Edible Fryer Oil Hose



Service/Application:

Edible liquids, vegetable oils, salad dressings, vinegar, mustard and meat products requiring a sanitary hose which will not impair taste. Excellent for service with hot oil fat filters and fryers.

Temperature Range:

Up to 275°F (135°C) Constant, 350°F (176°C) Intermittent.

Construction:

White, FDA sanitary Nitrile tube, wire braid reinforcement. Gray FDA Nitrile cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Wire Braids	Weight (lbs./ft.)	Reel Length (ft.)	Part Number	List Price (ft.)	Steel Male x Male (Add-On)	Stainless Male x Male (Add-On)
1/2"	1.020	250#	1-Wire	0.48	250	1545-0500	\$ 10.68	\$ 30.80	\$ 257.22
5/8"	1.140	250#	1-Wire	0.53	250	1545-0625	13.80	42.86	-----
3/4"	1.265	250#	1-Wire	0.60	250	1545-0750	13.88	48.40	287.68

Product Code: A040

HOSE ASSEMBLIES INCLUDE RIGID NPT MALES ATTACHED BOTH ENDS
LESS 15% FULL REELS - RANDOM LENGTHS ON REELS

High Pressure FDA Wash-Down Hose Assembly



Service/Application:

Applications requiring resistance to animal fats such as poultry processing, meat packing, hotel and restaurant maintenance. Recommended for service requiring resistance to petroleum based products.

Temperature Range:

-40°F to 300°F (-40°C to 149°C) **NOT FOR STEAM SERVICE**

Construction:

Black, FDA, special polymer compounded for heat and detergent resistance reinforced with one braid high tensile steel wire. Yellow, FDA, special polymer compounded for resistance to animal fat, detergent, abrasion and weathering.

25 Ft. Assembly
NPT Male x Male Swivel

50 Ft. Assembly
NPT Male x Male Swivel

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Part Number	List Price (ea.)	Part Number	List Price (ea.)
3/8"	0.690	3000#	0.19	A096-6-M-MS/25	\$ 192.01	A096-6-M-MS/50	\$ 355.51
1/2"	0.820	3000#	0.26	A096-8-M-MS/25	246.42	A096-8-M-MS/50	456.42
3/4"	1.100	2000#	0.35	A096-12-M-MS/25	266.10	A096-12-M-MS/50	478.60

Product Code: A096

ASSEMBLIES INCLUDE ZINC PLATED HIGH-PRESSURE CRIMP NPT MALE & MALE SWIVEL FITTINGS.
CUSTOM LENGTHS AND STAINLESS STEEL FITTINGS ALSO AVAILABLE



Add a Live Swivel to the nozzle end of any Wash-Down Hose Assembly.

- Stainless/Brass
- All Stainless Steel



Continental Blue Fortress® 300 (Microban® Cover)

Service/Application:

A high-quality construction for hot water up to 200°F for cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries where high oil resistance is required. The White tube is comprised of FDA compliant materials.

Temperature Range: -20°F to 210°F (-29°C to 99°C)

Construction:

White, FDA compliant, oil resistant Nitrile tube reinforced with multiple plies of textile. Smooth, Blue abrasion resistant Nitrile rubber cover with Microban® antimicrobial protection.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	Bulk Hose & Adder per Foot List Price (ft.)	Brass Male x Female (Add-On) List Price (Both Ends)	Brass/Stainless Live Swivel (Add-On) List Price (One End)
1/2"	0.900	300#	0.30	500	1513-0500	\$ 4.38	\$ 43.00	\$ 52.50
5/8"	1.060	300#	0.37	500	1513-0625	5.15	45.00	55.13
3/4"	1.190	300#	0.44	500	1513-0750	6.51	45.00	61.69
1"	1.500	300#	0.57	450	1513-1000	7.94	45.00	-----

Product Code: 569-121

ASSEMBLIES INCLUDE LONG SHANK GHT BRASS FITTINGS & 304 STAINLESS STEEL FERRULES - 1" HOSE ASSEMBLY HAS NPSH THREADS
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL REELS ONLY

Add a Live Swivel to the nozzle end of any Wash-Down Hose Assembly.

- Stainless/Brass
- All Stainless Steel



Continental Yellow Fortress® 300 (Microban® Cover)

Service/Application:

A high-quality construction for hot water up to 200°F for cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries where high oil resistance is required. (NOT FDA)

Temperature Range: -20°F to 210°F (-29°C to 99°C)

Construction:

Black oil resistant Nitrile tube reinforced with multiple plies of textile. Smooth, Yellow abrasion resistant Nitrile rubber cover with Microban® antimicrobial protection.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	Bulk Hose & Adder per Foot List Price (ft.)	Brass Male x Female (Add-On) List Price (Both Ends)	Brass/Stainless Live Swivel (Add-On) List Price (One End)
1/2"	0.900	300#	0.29	500	1514-0500	\$ 3.19	\$ 43.00	\$ 52.50
5/8"	1.060	300#	0.36	500	1514-0625	4.89	45.00	55.13
3/4"	1.190	300#	0.41	450	1514-0750	5.22	45.00	61.69


Product Code: 569-120

ASSEMBLIES INCLUDE LONG SHANK GHT BRASS FITTINGS & 304 STAINLESS STEEL FERRULES
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL REELS ONLY



Add a Live Swivel to the nozzle end of any Wash-Down Hose Assembly.

- Stainless/Brass
- All Stainless Steel

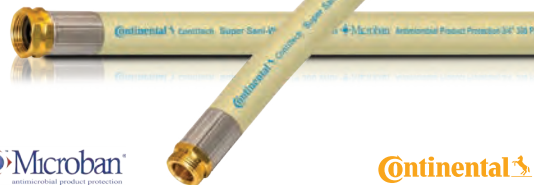

ContiTech

Continental Super Sani-Wash™ 300 (Microban® Cover)

Service/Application:

An economical hose for hot water wash-down up to 200°F cleanup in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Hose incorporates Microban's® antimicrobial built-in product protection. (NOT FDA)

Temperature Range: -40 °F to 210 °F (-40°C to 99°C)

Construction:

Black EPDM tube reinforced with multiple plies of textile. Smooth, White abrasion resistant EPDM rubber cover with Microban® antimicrobial protection. 3/4" ID also available with White FDA Compliant tube (Series 1512-0750).

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	Bulk Hose & Adder per Foot List Price (ft.)	Brass	Brass/Stainless
							Male x Female (Add-On) List Price (Both Ends)	Live Swivel (Add-On) List Price (One End)
1/2"	0.840	300#	0.26	500	1511-0500	\$ 3.03	\$ 43.00	\$ 52.50
3/4"	1.170	300#	0.42	500	1511-0750	4.97	45.00	61.69
1"	1.470	300#	0.62	450	1511-1000	7.20	45.00	-----

Product Code: 569-021

ASSEMBLIES INCLUDE LONG SHANK GHT BRASS FITTINGS & 304 STAINLESS STEEL FERRULES - 1" HOSE ASSEMBLY HAS NPSH THREADS
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL REELS ONLY

Add a Live Swivel to the nozzle end of any Wash-Down Hose Assembly.

- Stainless/Brass
- All Stainless Steel



ContiTech

Continental Fortress 300 White - Wash-Down Hose

Service/Application:

A high-quality, economical construction for hot water up to 200°F cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries where high oil resistance is required. (NOT FDA)

Temperature Range: -20 °F to 210 °F (-29°C to 99°C)

Construction:

Black oil resistant Nitrile tube reinforced with multiple plies of textile. Smooth, White abrasion and oil resistant rubber cover.

Hose I.D.	Hose O.D.	W/P @ 70°F	Weight (lbs./ft.)	Std. Length (ft.)	Part Number	Bulk Hose & Adder per Foot List Price (ft.)	Brass	Brass/Stainless
							Male x Female (Add-On) List Price (Both Ends)	Live Swivel (Add-On) List Price (One End)
1/2"	0.910	300#	0.27	500	1510-0500	\$ 2.88	\$ 43.00	\$ 52.50
3/4"	1.180	300#	0.40	500	1510-0750	4.39	45.00	61.69
1"	1.500	300#	0.60	450	1510-1000	6.84	45.00	-----


Product Code: 569-019

ASSEMBLIES INCLUDE LONG SHANK GHT BRASS FITTINGS & 304 STAINLESS STEEL FERRULES - 1" HOSE ASSEMBLY HAS NPSH THREADS
CUSTOM ASSEMBLED LENGTHS AND OTHER END CONFIGURATIONS AVAILABLE.
LESS 10% FULL REELS ONLY



Mixer/Hose Stations

Bronze - Hot & Cold Mixers

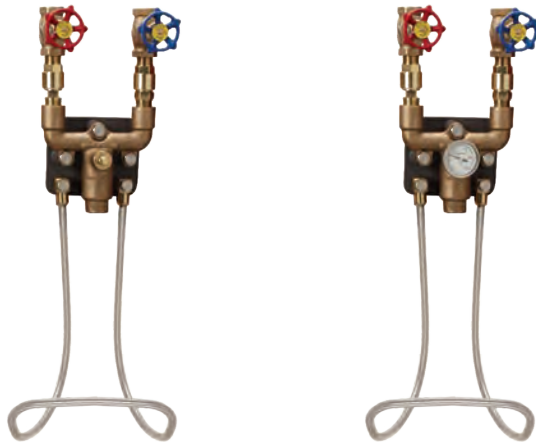

Hot and Cold Water Mixing Station, Bronze Construction, Wall Mounted, with Bronze Globe-Style Control Valves, In-Line Check Valves, Stainless Steel Hose Rack, Sani-Mount Wall Bracket, Stainless Steel Hardware (LESS HOSE AND NOZZLE)


Bronze
without Gauge

Bronze
with Gauge

Part No.	List Price (ea.)	Part No.	List Price (ea.)
MM3000	\$ 1150.88	MM3000-TG	\$ 1324.13

Product Code: MIXER

Stainless - Hot & Cold Mixers

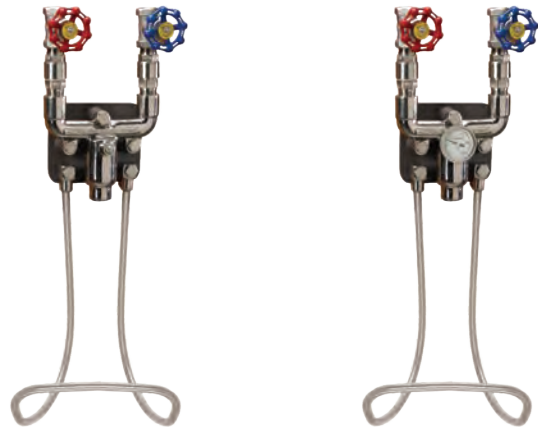

Hot and Cold Water Mixing Station, Stainless Steel Construction, Wall Mounted, with Stainless Globe-Style Control Valves, In-Line Check Valves, Stainless Steel Hose Rack, Sani-Mount Wall Bracket, Stainless Steel Hardware (LESS HOSE AND NOZZLE)


Stainless
without Gauge

Stainless
with Gauge

Part No.	List Price (ea.)	Part No.	List Price (ea.)
MM3000SS	\$ 3069.00	MM3000SS-TG	\$ 3229.88

Product Code: MIXER

Steam & Cold Mixers

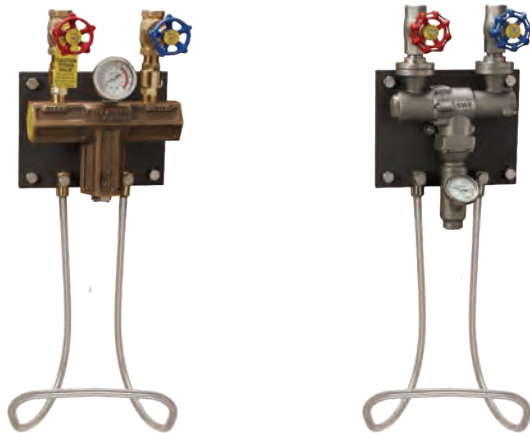

Steam and Cold Water Mixing Station includes Wall Mount, Globe Style Control Valves, In Line Check Valves, Stainless Steel Temperature Gauge, Stainless Steel Hose Rack and Mounting Plate with Stainless Steel Hardware (LESS HOSE AND NOZZLE)

Bronze
with Gauge

Stainless
with Gauge

Part No.	List Price (ea.)	Part No.	List Price (ea.)
STM2000	\$ 2994.75	STM4000	\$ 5308.88

Product Code: MIXER



ADDITIONAL PARTS AND REPLACEMENT PARTS AVAILABLE FOR ALL MIXER/HOSE STATIONS AND NOZZLES

Wash-Down Hose Reels & Hose Hangers

Auto-Rewind - Hose Reels



	50 Ft.	75 Ft.	100 Ft.
Hose Size	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)
1/2"	TSHL-N-450-SS \$ 000.00	TSHL-N-475-SS \$ 3165.40	TSHL-N-4100-SS \$ 000.00
3/4"	TSHL-N-550-SS 2836.37	D9300 OLS-S 000.00	----- -----

Product Code: COX

Hand-Crank - Hose Reels



	100 Ft.
Hose Size	Part No. List Price (ea.)
1/2"	T1125-4-100-SP \$ 000.00
3/4"	1125-5-100-SP 000.00
1"	1175-6-100-SP 000.00

Product Code: COX

Hose Hangers - Heavy-Duty Wall Mount



12ga Stainless (Arch Design)

Part No.	Dimensions L x W x H	List Price (ea.)
FBH-200	16" x 6" x 16"	\$ 560.00

Product Code: FBH



All Stainless (w/ Clamp Holders)

Part No.	Dimensions L x W x H	List Price (ea.)
FBH-100	16" x 6" x 16"	\$ 000.00

Product Code: FBH



All Stainless Steel (Slot Design w/ Clamp Holders)

Part No.	Capacity (Holds)	Dimensions L x W x H	List Price (ea.)
FBH-12	(12 ea) 3/4" Hoses	6" x 5.13" x 7.5"	\$ 455.00
FBH-16	(4 ea) 1" Hoses	6" x 5.13" x 7.5"	455.00
FBH-24	(4 ea) 1½" Hoses	6" x 5.13" x 7.5"	455.00
FBH-32	(4 ea) 2" Hoses	6" x 5.63" x 7.5"	455.00

Product Code: FBH



Wash-Down Nozzles & Accessories

Rubber Covered Wash-Down Nozzles



	Black	White	Blue	Red	Gray	White (w/ Temp Indicator)
	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)
Bronze	S151B \$ 231.00	S151W \$ 246.75	S151BL \$ 238.88	S151R \$ 238.88	S151G \$ 238.88	S151TRW \$ 349.13
Aluminum	S151ALB 246.75	S151ALW 270.38	S151ALBL 254.63	S151ALR 254.63	S151ALG 254.63	S151ALTRW 370.13
Stainless	S151SSB 498.75	S151SSW 514.50	S151SSBL 506.63	S151SSR 506.63	S151SSG 506.63	----- -----

Product Code: S151

ALL STANDARD NOZZLES HAVE 1/2" NPT FEMALE PORT
OTHER COLORS AVAILABLE WITH HIGH TEMPERATURE INDICATOR GAUGES

Compact Rubber Covered Wash-Down Nozzles w/ Adapter



	Black	Black	White	White
	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)
Bronze	S151JRBGHTJR \$ 173.25	----- -----	S151JRWGHTJR \$ 186.38	----- -----
Stainless	----- -----	S151JRSSBGHTJR 278.25	----- -----	S151JRSSWGHTJR 288.75

Product Code: S151

COMPACT SIZE NOZZLES HAVE 3/8" NPT FEMALE PORT - SUPPLIED WITH SWIVEL ADAPTER (GHTJR or GHTJRSS)




Complete Line of Wash-Down
Hoses and Accessories



Wash-Down Fittings & Accessories

Long Shank Wash-Down Hose Inserts

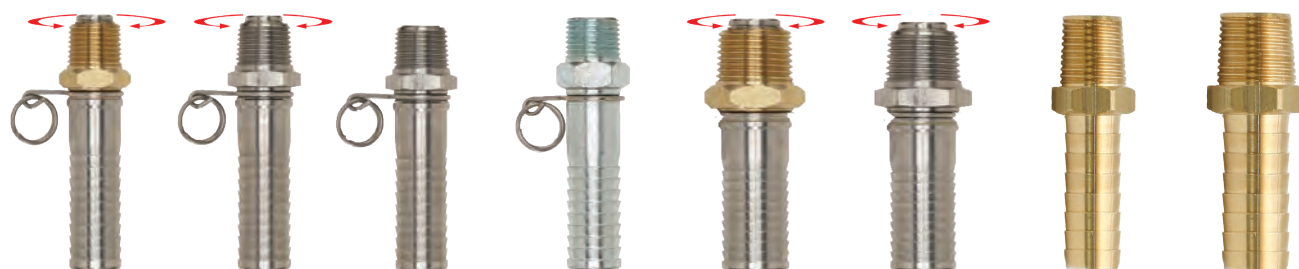


	SS/Brass 1/2" NPT Swivel	Stainless 1/2" NPT Swivel	Stainless 1/2" NPT Rigid	Plated Steel 1/2" NPT Rigid	SS/Brass 3/4" NPT Swivel	Stainless 3/4" NPT Swivel	Brass 1/2" NPT Rigid	Brass 3/4" NPT Rigid
Hose Size	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)	Part No. List Price (ea.)
1/2"	50S \$ 57.75	50SSS \$ 68.25	50NSS \$ 30.84	----- -----	----- -----	----- -----	A102L-08 15.50	----- -----
5/8"	625S 60.38	625SSS 78.75	----- -----	625NS 28.88	625SX 65.63	625SSSX 91.88	----- -----	----- -----
3/4"	75S 65.63	75SSS 84.00	75NSS 68.25	75NS 42.00	75SX 74.25	75SSSX 105.00	----- -----	A102L-12 15.75

Product Code: S151A

RECOMMENDED FOR WASH-DOWN HOSES - IMAGE SHOWN MAY DIFFER FROM ACTUAL PRODUCT

Wash-Down Swivel Adapters

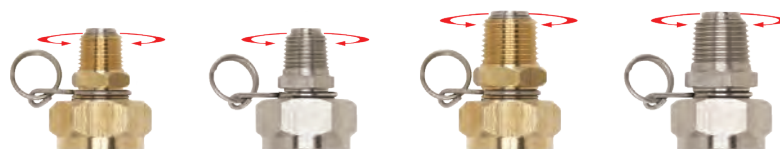

	Brass/Stainless 3/8" NPT Swivel	Stainless 3/8" NPT Swivel	Brass/Stainless 1/2" NPT Swivel	Stainless 1/2" NPT Swivel
Size	Part No. List Price(ea.)	Part No. List Price(ea.)	Part No. List Price(ea.)	Part No. List Price(ea.)
Female GHT	GHTJR \$ 52.50	GHTJRSS \$ 62.34	GHTS \$ 65.63	GHTSSS \$ 81.38

Product Code: S151A

Garden Hose Thread x Tri-Clamp Adapters



304 Stainless Steel
Male GHT x Tri-Clamp



304 Stainless Steel
Female GHT x Tri-Clamp

Size	Clamp Size	Part No.	List Price (ea.)
GHT	1-1/2"	TC150/075-MGHT	\$ 33.00

Product Code: TC15

Size	Clamp Size	Part No.	List Price (ea.)
GHT	1-1/2"	TC150/075-FGHT	\$ 34.00

Product Code: TC15



800-852-1855



www.abbottrubber.com

Wash-Down Hose Couplings

Brass - Long Shank Couplings



M&F Set
Long Shank

Female
Long Shank

Male
Long Shank

NSF EPDM
Washer*

Hose Size	Thread	Part No.	List Price (ea.)	Part No.	List Price (ea.)	Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	GHT	A192L-0808	\$ 12.50	A191L-0812	\$ 8.50	A190L-0812	\$ 7.00	NSFW-12	\$ 1.00
5/8"	GHT	A192L-1010	12.50	A191L-1012	8.50	A190L-1012	7.00	NSFW-12	1.00
3/4"	GHT	A192L-1212	12.50	A191L-1212	8.50	A190L-1212	7.00	NSFW-12	1.00
1"	NPSM	A192L-1616	20.50	A191L-1616	12.00	A190L-1616	11.50	NSFW-16	1.00

Product Code: A192L

NON-NSF SBR RUBBER WASHER INSTALLED ON ALL BRASS COUPLINGS (*NSF WASHER OPTIONAL)

Standard Shank Couplings



Hose Size	Thread	Material	Part No.	List Price (ea.)
3/8"	GHT	Brass	A192-0606	\$ 8.50
1/2"	GHT	Brass	A192-0808	8.50
1/2"	GHT	Lead Free Brass	5920808KLF	31.09
1/2"	GHT	303 Stainless	5920808KSS	162.80
5/8"	GHT	Brass	A192-1010	8.50
5/8"	GHT	Lead Free Brass	5921010KLF	31.09
5/8"	GHT	303 Stainless	5921010KSS	162.70
3/4"	GHT	Brass	A192-1212	8.50
3/4"	GHT	Lead Free Brass	5921212KLF	31.09
3/4"	GHT	303 Stainless	5921212KSS	162.70
1"	NPSM	Brass	A192-1616	18.50
1"	NPSM	Lead Free Brass	5921616K	26.85

Product Code: A192

MOST SIZES AVAILABLE IN ALUMINUM, NYLON, POLYPROPYLENE AND STEEL

Hose Menders



Hose Size	Hose Size	Material	Part No.	List Price (ea.)
1/8"	1/8"	Brass	A178-0202	\$ 1.98
1/4"	1/4"	Brass	A178-0404	2.04
1/4"	1/4"	316 Stainless	A178-0404-SS	15.20
3/8"	3/8"	Brass	A178-0606	2.40
3/8"	3/8"	316 Stainless	A178-0606-SS	16.30
1/2"	1/2"	Brass	A178-0808	3.36
1/2"	1/2"	316 Stainless	A178-0808-SS	24.45
5/8"	5/8"	Brass	A178-1010	4.00
3/4"	3/4"	Brass	A178-1212	5.60
3/4"	3/4"	316 Stainless	A178-1212-SS	31.40
1"	1"	Brass	A178-1616	10.50

Product Code: A178

NYLON PARTS SOLD IN BAGS OF 50 ONLY
JUMP SIZES ALSO AVAILABLE

Garden Hose - Brass Cap



Female GHT	Material	Part No.	List Price (ea.)
3/4"	Brass	5131212C	\$ 4.42

Product Code: A513

Garden Hose - Filter Washer



Size	Material	Part No.	List Price (ea.)
3/4"	FDA PVC, 304 S/S	A192-12-RWF	\$.82

Product Code: A591

304 STAINLESS STEEL 6050 MESH

Wash-Down Adapters

Male GHT x Male NPT



Male GHT	Male NPTF	Material	Part No.	List Price (ea.)
3/4"	3/8"	Brass	5081206C	\$ 5.12
3/4"	1/2"	Brass	5081208C	5.28
3/4"	1/2"	Lead Free Brass	5081208CLF	10.89
3/4"	1/2"	303 Stainless	5081208SS	37.87
3/4"	3/4"	Brass	5081212C	6.39
3/4"	3/4"	303 Stainless	5081212SS	35.27
3/4"	3/4" x 1/2"	Brass	5141212C*	5.78
3/4"	3/4" x 1/2"	Lead Free Brass	5141212CLF*	11.06
3/4"	3/4" x 1/2"	303 Stainless	5141212SS*	40.38
3/4"	1"	Brass	5081216C	12.87

Product Code: A508

* HAS 1/2" NPT FEMALE NPT INSIDE THE 3/4" NPT MALE

Male GHT x Female NPT



Male GHT	Female NPTF	Material	Part No.	List Price (ea.)
3/4"	1/4"	Brass	5071204C	\$ 4.21
3/4"	3/8"	Brass	5071206C	4.79
3/4"	1/2"	Brass	5071208C	4.50
3/4"	1/2"	303 Stainless	5071208SS	26.40
3/4"	3/4"	Brass	5071212C	7.22
3/4"	3/4"	Lead Free Brass	5071212CLF	10.97
3/4"	3/4"	304 Stainless	5071212SS	44.51

Product Code: A507

Male GHT x Male GHT



Male GHT	Male GHT	Material	Part No.	List Price (ea.)
3/4"	3/4"	Brass	5091212C	\$ 5.36
3/4"	3/4"	303 Stainless	5091212SS	34.86
3/4"	1" *	Brass	5091612C	11.14

Product Code: A509

* NPSH THREAD

Female Swivel GHT x GHT



Swivel Female GHT	Swivel Female GHT	Material	Part No.	List Price (ea.)
3/4"	3/4"	Brass	5061212C	\$ 8.87
3/4"	3/4"	Lead Free Brass	5061212CLF	17.86

Product Code: A506

SWIVELS UNTIL TIGHTENED

Female GHT x Female NPT




Swivel Female GHT	Female NPTF	Material	Part No.	List Price (ea.)
3/4"	1/2"	Brass	5021208C	\$ 7.71
3/4"	1/2"	Lead Free Brass	5021208CLF	15.47
3/4"	1/2"	303 Stainless	5021208SS	65.79
3/4"	3/4"	Brass	5021212C	9.45
3/4"	3/4"	Lead Free Brass	5021212CLF	20.17
3/4"	3/4"	303 Stainless	5021212SS	73.67

Product Code: A502

GHT FEMALE SWIVELS UNTIL TIGHTENED

Female GHT x Male NPT



Swivel Female GHT	Male NPTF	Material	Part No.	List Price (ea.)
3/4"	1/4"	Brass	5041204C	\$ 8.13
3/4"	3/8"	Brass	5041206C	8.25
3/4"	1/2"	Brass	5041208C	8.09
3/4"	1/2"	303 Stainless	5041208SS	76.44
3/4"	3/4"	Brass	5041212C	9.86
3/4"	3/4"	303 Stainless	5041212SS	80.97

Product Code: A504

GHT FEMALE SWIVELS UNTIL TIGHTENED



Hose & Fitting Protection

HoseGard™ Hose Supports



Features:

HoseGard's lightweight, two piece design with stainless steel socket head cap screws installs easily on your hose, stays in place allowing the hose to slide across the floor. The built-in handle facilitates movement, placement and carrying of the hose, while protecting workers from ergonomic-related injuries and associated costs.

Hose I.D. Size	Fits Hose O.D. (in)	Material	Yellow		Blue	
			Part No.	List Price (ea.)	Part No.	List Price (ea.)
1½"	2.150 - 2.643	HDPE	HG150Y	\$ 188.42	HG150B	\$ 188.42
2"	2.644 - 3.155	HDPE	HG200Y	193.50	HG200B	193.50
2½"	3.156 - 3.719	HDPE	HG250Y	198.59	HG250B	198.59
3"	3.720 - 4.719	HDPE	HG300Y	203.68	HG300B	203.68
4"	4.720 - 4.875	HDPE	HG400Y	208.80	HG400B	208.80

Product Code: HGY (Yellow), HGB (Blue)

Adjusta-Flex Hose Donuts



Features:

This patented universal hose donut fits a wide range of outside diameters, consistent tight fit and secure. Made of impact and crack resistant FDA grade polyurethane plastic. Supplied with stainless steel hardware. Also features a built-in carrying handle.

Temperature Range: -20°F to 250°F.

Hose I.D. Size	Fits Hose O.D. (in)	Material	Standard Duty		Heavy-Duty (1.50" Thick)	
			Part No.	List Price (ea.)	Part No.	List Price (ea.)
1"	1.240 - 1.750	Polyurethane	146-0210	\$ 57.60	146-1015	\$ 115.20
1½"	1.800 - 2.380	Polyurethane	146-0215	62.40	146-1015	115.20
2"	2.380 - 2.900	Polyurethane	146-0220	67.20	146-1020	115.20
2½"	2.750 - 3.500	Polyurethane	146-0225	79.20	146-1025	115.20
3"	3.400 - 4.250	Polyurethane	146-0230	84.00	146-1030	115.20
4"	4.375 - 5.400	Polyurethane	146-0240	93.60	146-1040	213.60
5"	6.400 - 7.400	Polyurethane	-----	-----	146-1060	213.60

Product Code: Donut

Silicone Rubber End Bumpers




Hose I.D. Size	Material	Part No.	List Price (ea.)
1½"	Gray Silicone	SAB-150	\$ 18.73
2"	Gray Silicone	SAB-200	20.34
2½"	Gray Silicone	SAB-250	23.52
3"	Gray Silicone	SAB-300	26.71

Product Code: SAB

S/S Tri-Clamp Adapters

Clamp Sight Glass

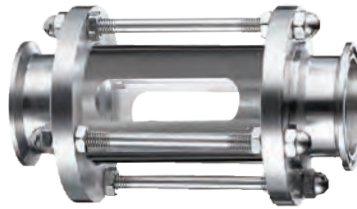

Clamp Size	Clamp Size	Temp	Stainless	W/P (PSI)	Part No.	List Price (ea.)
1"	1"	200°F	T316L	145	TCSG-100	\$ 580.80
1½"	1½"	200°F	T316L	145	TCSG-150	580.80
2"	2"	200°F	T316L	145	TCSG-200	619.52
2½"	2½"	200°F	T316L	120	TCSG-250	721.60
3"	3"	200°F	T316L	120	TCSG-300	802.56
4"	4"	200°F	T316L	95	TCSG-400	960.96

Product Code: TCSG



S/S Tri-Clamp Adapters

Clamp - Tee



Size	Clamp Size	304 Stainless Steel		316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	1/2"	-----	-----	7MP6-050	\$ 99.71
3/4"	3/4"	-----	-----	7MP6-075	99.71
1"	1½"	7MP4-100	52.83	7MP6-100	71.39
1½"	1½"	7MP4-150	53.76	7MP6-150	70.21
2"	2"	7MP4-200	65.22	7MP6-200	83.84
2½"	2½"	7MP4-250	81.70	7MP6-250	84.40
3"	3"	7MP4-300	118.98	7MP6-300	178.91
4"	4"	7MP4-400	173.22	7MP6-400	254.24

Product Code: 7MP4 (304 S/S), 7MP6 (316L S/S)

Clamp - Cross



Size	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1"	316L	9MP6-100	\$ 203.78
1½"	1½"	316L	9MP6-150	212.74
2"	2"	316L	9MP6-200	251.01
2½"	2½"	316L	9MP6-250	342.78
3"	3"	316L	9MP6-300	344.96
4"	4"	316L	9MP6-400	757.70

Product Code: 9MP6



Clamp 90° Elbow



Clamp Size	Clamp Size	304 Stainless Steel		316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	1/2"	-----	-----	2CMP6-050	\$ 58.88
3/4"	3/4"	-----	-----	2CMP6-075	58.88
1"	1½"	2CMP4-100	33.39	2CMP6-100	42.24
1½"	1½"	2CMP4-150	36.40	2CMP6-150	45.09
2"	2"	2CMP4-200	45.50	2CMP6-200	55.10
2½"	2½"	2CMP4-250	62.16	2CMP6-250	85.60
3"	3"	2CMP4-300	81.90	2CMP6-300	99.46
4"	4"	2CMP4-400	130.41	2CMP6-400	159.55

Product Code: 2CMP4 (304 S/S), 2CMP6 (316L S/S)

Clamp 45° Elbow



Clamp Size	Clamp Size	304 Stainless Steel		316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	1/2"	-----	-----	2KMP6-050	\$ 62.78
3/4"	3/4"	-----	-----	2KMP6-075	62.78
1"	1½"	2KMP4-100	30.31	2KMP6-100	38.08
1½"	1½"	2KMP4-150	31.85	2KMP6-150	41.86
2"	2"	2KMP4-200	39.41	2KMP6-200	54.59
2½"	2½"	2KMP4-250	53.06	2KMP6-250	78.24
3"	3"	2KMP4-300	58.80	2KMP6-300	102.27
4"	4"	2KMP4-400	69.79	2KMP6-400	166.43

Product Code: 2KMP4 (304 S/S), 2KMP6 (316L S/S)



S/S Tri-Clamp Adapters

Concentric Reducer (Clamp x Clamp)



Clamp Size	Clamp Size	304 Stainless Steel		316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
3/4"	1/2"	-----	-----	3114MP6-075050	\$ 125.70
1"	1/2"	-----	-----	3114MP6-100050	119.97
1"	3/4"	-----	-----	3114MP6-100075	119.97
1½"	1/2"	-----	-----	3114MP6-150050	150.88
1½"	3/4"	-----	-----	3114MP6-150075	150.88
1½"	1"	3114MP4-150100	54.08	3114MP6-150100	59.20
2"	1"	3114MP4-200100	74.14	3114MP6-200100	89.31
2"	1½"	3114MP4-200150	56.83	3114MP6-200150	62.98
2½"	1½"	3114MP4-250150	79.52	3114MP6-250150	85.22
2½"	2"	3114MP4-250200	68.77	3114MP6-250200	77.95
3"	1"	3114MP4-300100	234.75	3114MP6-300100	316.86
3"	1½"	3114MP4-300150	135.23	3114MP6-300150	165.25
3"	2"	3114MP4-300200	92.80	3114MP6-300200	107.30
3"	2½"	3114MP4-300250	84.83	3114MP6-300250	94.27
4"	1"	3114MP4-400100	378.21	3114MP6-400100	459.52
4"	1½"	3114MP4-400150	323.30	3114MP6-400150	404.61
4"	2"	3114MP4-400200	184.10	3114MP6-400200	219.68
4"	2½"	3114MP4-400250	209.15	3114MP6-400250	232.13
4"	3"	3114MP4-400300	124.83	3114MP6-400300	140.61
6"	2"	3114MP4-600200	POR	3114MP6-600200	POR
6"	3"	3114MP4-600300	POR	3114MP6-600300	POR
6"	4"	3114MP4-600400	POR	3114MP6-600400	POR
8"	3"	3114MP4-800300	POR	3114MP6-800300	POR
8"	4"	3114MP4-800400	POR	3114MP6-800400	POR
8"	6"	3114MP4-800600	POR	3114MP6-800600	POR

Product Code: 3114MP4 (304 S/S), 3114MP6 (316L S/S)

ABBOTTRUBBER
COMPANY, INC.



S/S Tri-Clamp Adapters

Eccentric Reducer (Clamp x Clamp)



Clamp Size	Clamp Size	304 Stainless Steel		316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
3/4"	1/2"	-----	-----	3214MP6-075050	\$ 189.09
1"	1/2"	-----	-----	3214MP6-100050	233.66
1"	3/4"	-----	-----	3214MP6-100075	216.67
1½"	1/2"	-----	-----	3214MP6-150050	248.67
1½"	3/4"	-----	-----	3214MP6-150075	248.67
1½"	1"	3214MP4-150100	61.09	3214MP6-150100	65.63
2"	1"	3214MP4-200100	144.03	3214MP6-200100	220.06
2"	1½"	3214MP4-200150	69.50	3214MP6-200150	117.47
2½"	1½"	3214MP4-250150	95.90	3214MP6-250150	164.45
2½"	2"	3214MP4-250200	80.77	3214MP6-250200	150.91
3"	1"	3214MP4-300100	234.85	3214MP6-300100	158.53
3"	1½"	3214MP4-300150	155.84	3214MP6-300150	151.74
3"	2"	3214MP4-300200	112.58	3214MP6-300200	139.55
3"	2½"	3214MP4-300250	136.45	3214MP6-300250	143.39
4"	1"	3214MP4-400100	308.16	3214MP6-400100	436.96
4"	1½"	3214MP4-400150	239.52	3214MP6-400150	368.32
4"	2"	3214MP4-400200	232.83	3214MP6-400200	256.54
4"	2½"	3214MP4-400250	226.75	3214MP6-400250	166.37
4"	3"	3214MP4-400300	165.60	3214MP6-400300	249.82
6"	2"	3214MP4-600200	POR	3214MP6-600200	POR
6"	3"	3214MP4-600300	POR	3214MP6-600300	POR
6"	4"	3214MP4-600400	POR	3214MP6-600400	POR
8"	3"	3214MP4-800300	POR	3214MP6-800300	POR
8"	4"	3214MP4-800400	POR	3214MP6-800400	POR
8"	6"	3214MP4-800600	POR	3214MP6-800600	POR

Product Code: 3214MP4 (304 S/S), 3214MP6 (316L S/S)

ABBOTTRUBBER
COMPANY, INC.



800-852-1855



www.abbottrubber.com

S/S Tri-Clamp Adapters

Clamp x Male NPT Adapter



Clamp Size	Thread NPT	T304L Stainless Steel		T316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	1/2"	21MP4-050	\$ 32.96	21MP6-050	\$ 51.81
3/4"	3/4"	21MP4-075	36.38	21MP6-075	43.94
3/4"	1/2"	-----	-----	21MP6-075050	63.20
1"	1"	21MP4-100	60.90	21MP6-100	75.30
1"	1/2"	-----	-----	21MP6-100050	108.96
1"	3/4"	-----	-----	21MP6-100075	108.96
1 1/2"	1 1/2"	21MP4-150	49.70	21MP6-150	74.30
1 1/2"	1/2"	21MP4-150050	57.82	21MP6-150050	105.18
1 1/2"	3/4"	21MP4-150075	55.83	21MP6-150075	105.18
1 1/2"	1"	21MP4-150100	51.17	21MP6-150100	95.04
1 1/2"	1 1/4"	-----	-----	21MP6-150125	95.04
1 1/2"	2"	21MP4-150200	95.48	-----	-----
2"	2"	21MP4-200	71.02	21MP6-200	109.38
2"	1"	21MP4-200100	63.32	21MP6-2000100	132.86
2"	1 1/2"	21MP4-200150	89.36	21MP6-2000150	123.01
2"	1/2"	-----	-----	21MP6-200050	147.17
2"	3/4"	21MP4-200075	68.88	21MP6-200075	147.17
2 1/2"	2 1/2"	21MP4-250	100.96	21MP6-250	158.24
2 1/2"	1 1/2"	-----	-----	21MP6-250150	172.29
2 1/2"	2"	-----	-----	21MP6-250200	172.29
3"	3"	21MP4-300	103.43	21MP6-300	191.84
3"	2"	21MP4-300200	154.04	21MP6-300200	207.17
4"	4"	21MP4-400	160.86	21MP6-400	411.65
4"	3"	21MP4-400300	231.00	21MP6-400300	437.73

Product Code: 21MP4 (T304L S/S), 21MP6 (T316L S/S)

ABBOTTRUBBER
COMPANY, INC.



S/S Tri-Clamp Adapters

Clamp x Female NPT Adapter



Clamp Size	Thread NPT	T304L Stainless Steel		T316L Stainless Steel	
		Part No.	List Price (ea.)	Part No.	List Price (ea.)
1/2"	1/2"	22MP4-050	\$ 56.32	22MP6-050	\$73.92
3/4"	3/4"	22MP4-075	56.32	22MP6-075	73.92
3/4"	1/2"	-----	-----	22MP6-075050	89.28
1"	1"	22MP4-100	63.20	22MP6-100	80.86
1"	1/2"	-----	-----	22MP6-100050	80.48
1"	3/4"	-----	-----	22MP6-100075	80.48
1 1/2"	1 1/2"	22MP4-150	57.30	22MP6-150	87.10
1 1/2"	1/2"	22MP4-150050	61.92	22MP6-150050	95.07
1 1/2"	3/4"	22MP4-150075	57.12	22MP6-150075	95.07
1 1/2"	1"	22MP4-150100	49.70	22MP6-150100	87.84
1 1/2"	1 1/4"	-----	-----	22MP6-150125	87.84
1 1/2"	2"	22MP4-150200	127.65		
2"	2"	22MP4-200	76.37	22MP6-200	113.25
2"	1"	22MP4-200100	81.90	22MP6-2000100	94.14
2"	1 1/2"	22MP4-200150	103.88	22MP6-2000150	85.86
2"	1/2"	-----	-----	22MP6-200050	102.46
2"	3/4"	22MP4-200075	73.78	22MP6-200075	102.46
2 1/2"	2 1/2"	22MP4-250	146.27	22MP6-250	198.02
2 1/2"	1 1/2"	-----	-----	22MP6-250150	239.20
2 1/2"	2"	-----	-----	22MP6-250200	239.20
3"	3"	22MP4-300	115.50	22MP6-300	223.52
3"	2"	22MP4-300200	179.10	22MP6-300200	261.50
4"	4"	22MP4-400	204.16	22MP6-400	471.68
4"	3"	22MP4-400300	330.02	22MP6-400300	509.66

Product Code: 22MP4 (T304L S/S), 22MP6 (T316L S/S)

ABBOTTRUBBER
COMPANY, INC.



800-852-1855



www.abbottrubber.com

S/S Tri-Clamp - Weld Adapters

Weld x Clamp 90° Elbow



Tube O.D.	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1½"	304	L2CM4-100	\$ 48.32
1½"	1½"	304	L2CM4-150	48.32
2"	2"	304	L2CM4-200	53.22
2½"	2½"	304	L2CM4-250	69.60
3"	3"	304	L2CM4-300	91.52
4"	4"	304	L2CM4-400	160.16

ALSO AVAILABLE IN 316 STAINLESS STEEL

Product Code: L2CM4 (304 S/S), L2CM6 (316L S/S)

Weld x Clamp 45° Elbow



Tube O.D.	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1½"	304	L2KM4-100	\$ 35.56
1½"	1½"	304	L2KM4-150	38.56
2"	2"	304	L2KM4-200	54.21
2½"	2½"	304	L2KM4-250	87.78
3"	3"	304	L2KM4-300	89.15
4"	4"	304	L2KM4-400	145.02

ALSO AVAILABLE IN 316 STAINLESS STEEL

Product Code: L2KM4 (304 S/S), L2KM6 (316L S/S)

Weld 90° Elbow



Tube O.D.	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1½"	304	L2S4P-100	\$ 21.79
1½"	1½"	304	L2S4P-150	23.30
2"	2"	304	L2S4P-200	25.31
2½"	2½"	304	L2S4P-250	36.06
3"	3"	304	L2S4P-300	51.14
4"	4"	304	L2S4P-400	92.45

ALSO AVAILABLE IN 316 STAINLESS STEEL

Product Code: L2S4P (304 S/S), L2S6P (316L S/S)

Weld 45° Elbow



Tube O.D.	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1½"	304	L2KS4P-100	\$ 17.92
1½"	1½"	304	L2KS4P-150	19.46
2"	2"	304	L2KS4P-200	24.06
2½"	2½"	304	L2KS4P-250	33.15
3"	3"	304	L2KS4P-300	44.83
4"	4"	304	L2KS4P-400	77.18
6"	6"	304	L2KS4P-600	414.69

ALSO AVAILABLE IN 316 STAINLESS STEEL

Product Code: L2KS4P (304 S/S), L2KS6P (316L S/S)

ABBOTTRUBBER
COMPANY, INC.



S/S Tri-Clamp Fittings & Adapters

Clamp End x Coupler



Size	Clamp Size	Stainless	Part No.	List Price (ea.)
1½"	1½"	316	RC150SE	\$ 298.55
2"	2"	316	RC200SE	343.35
3"	3"	316	RC300SE	541.80

Product Code: RCSE

Clamp End x Adapter



Size	Clamp Size	Stainless	Part No.	List Price (ea.)
1½"	1½"	316	RE150SE	\$ 180.00
2"	2"	316	RE200SE	199.10
3"	3"	316	RE300SE	418.00

Product Code: RESE

Low-Pressure Clamp Hose Barb (Long)



Barb Size	Clamp Size	Stainless	Part No.	List Price (ea.)
1"	1½"	304	100LPTCLI	\$ 61.75
1"	2"	304	100200LPTCLI	66.95
1½"	1½"	304	150LPTCLI	57.95
2"	2"	304	200LPTCLI	65.25
2½"	2½"	304	250LPTCLI	81.95
3"	3"	304	300LPTCLI	88.25
4"	4"	304	400LPTCLI	110.00

Product Code: LPTCLI

Low-Pressure Clamp Hose Barb (Short)



Barb Size	Clamp Size	Stainless	Part No.	List Price (ea.)
½"	½"	316L	14MPHR6-050	\$ 56.19
¾"	¾"	316L	14MPHR6-075	55.86
1"	1"	316L	14MPHR6-100	72.13
1½"	1½"	316L	14MPHR6-150	72.13
2"	2"	316L	14MPHR6-200	80.22
2½"	2½"	316L	14MPHR6-250	83.36
3"	3"	316L	14MPHR6-300	112.90
4"	4"	316L	14MPHR6-400	145.25

Product Code: 14MPHR6

316 Stainless Steel Mini-Valves



316 Stainless Steel
1/2 Male NPT x 1/2 Female NPT

Size	Size	Part No.	List Price (ea.)
1/2"	1/2"	BV050-SS-M	\$ 25.00

Product Code: BV050



316 Stainless Steel
1/2 Female NPT x 1/2 Female NPT

Size	Size	Part No.	List Price (ea.)
1/2"	1/2"	BV050-SS-M-F/F	\$ 25.00

Product Code: BV050



Clamp Butterfly Valve - Pull Handle



Clamp Size	Break Torque (in/lbs)	W/P @ 68°F	T316 S/S (EPDM Seals)		T316 S/S (Viton Seals)	
			Part No.	List Price (ea.)	Part No.	List Price (ea.)
1"	75#	140#	TCBFE-100	\$ 196.64	TCBFV-100	\$ 218.56
1½"	130#	140#	TCBFE-150	190.14	TCBFV-150	223.04
2"	165#	140#	TCBFE-200	229.57	TCBFV-200	276.29
2½"	210#	110#	TCBFE-250	280.26	TCBFV-250	378.14
3"	350#	110#	TCBFE-300	382.75	TCBFV-300	524.45
4"	540#	85#	TCBFE-400	588.90	TCBFV-400	868.67
6"	1550#	60#	TCBFE-600	1267.04	TCBFV-600	1865.09
8"	1650#	60#	TCBFE-800	2764.06	TCBFV-800	-----

OPERATING TEMPERATURE 15°F to 200°F

Product Code: TCBFE (EPDM Seals), TCBFV (Viton Seals)

Clamp Butterfly Valve (Trigger Handle)



Clamp Size	Max Operating Pressure	T304 S/S (Silicone Seals)	
		Part No.	List Price (ea.)
1"	110#	TCBFS4-100	\$ 136.16
1½"	110#	TCBFS4-150	136.16
2"	110#	TCBFS4-200	159.68
2½"	110#	TCBFS4-250	216.64
3"	110#	TCBFS4-300	273.76
4"	110#	TCBFS4-400	367.74

OPERATING TEMPERATURE 15°F to 200°F

Product Code: TCBFS4

Clamp Ball Valve (3-Piece Encapsulated)



Clamp Size	Max Operating Pressure	T316 S/S (PTFE Seats)	
		Part No.	List Price (ea.)
1/2"	200#	TCBVS-050	\$ 134.46
3/4"	200#	TCBVS-075	149.70
1"	200#	TCBVS-100	192.51
1½"	200#	TCBVS-150	313.57
2"	200#	TCBVS-200	448.26
2½"	200#	TCBVS-250	951.14
3"	200#	TCBVS-300	1293.79
4"	200#	TCBVS-400	2069.57

OPERATING TEMPERATURE -4°F to 392°F

Product Code: TCBVS



S/S Tri-Clamps & Gaskets

Single Pin - Tri-Clamp



Bolted - Tri-Clamp



Clamp Size	Stainless	Part No.	List Price (ea.)
½" & ¾"	304	13MHHM-050-075	\$ 8.29
1" & 1½"	304	13MHHM-100-150	10.85
2"	304	13MHHM-200	12.16
2½"	304	13MHHM-250	14.05
3"	304	13MHHM-300	14.94
4"	304	13MHHM-400	19.23
5"	304	13MHHM-500	57.34
6"	304	13MHHM-600	43.10
8"	304	13MHHM-800	65.06
10"	304	13MHHM-1000	170.02
12"	304	13MHHM-1200	196.99

Product Code: 13MHHM

Clamp Size	Stainless	Part No.	List Price (ea.)
½" & ¾"	304	13MHP-050-075	\$ 18.11
1" & 1½"	304	13MHP-100-150	20.48
2"	304	13MHP-200	25.63
2½"	304	13MHP-250	28.03
3"	304	13MHP-300	34.11
4"	304	13MHP-400	38.56
6"	304	13MHP-600	66.50
8"	304	13MHP-800	178.37

Product Code: 13MHP


Tri-Clamp Gaskets - FDA




PTFE (Tuf-Flex®)




PTFE



Viton



EPDM



Buna-N

Clamp Size	Part No.	List Price (ea.)	Part No.	List Price (ea.)	Part No.	List Price (ea.)	Part No.	List Price (ea.)	Part No.	List Price (ea.)
½"	GTCX-050	\$ 30.45	GTCT-050	\$ 1.63	GTCV-050	\$ 3.71	GTCE-050	\$ 1.38	GTCB-050	\$.99
¾"	GTCX-075	30.45	GTCT-075	1.63	GTCV-075	3.36	GTCE-075	1.38	GTCB-075	2.05
1"	GTCX-100	30.59	GTCT-100	1.79	GTCV-100	4.13	GTCE-100	.86	GTCB-100	.51
1½"	GTCX-150	34.37	GTCT-150	1.34	GTCV-150	2.91	GTCE-150	.99	GTCB-150	.38
2"	GTCX-200	37.45	GTCT-200	1.50	GTCV-200	3.10	GTCE-200	.99	GTCB-200	.51
2½"	GTCX-250	49.56	GTCT-250	2.02	GTCV-250	5.63	GTCE-250	1.15	GTCB-250	.61
3"	GTCX-300	60.20	GTCT-300	2.21	GTCV-300	7.23	GTCE-300	1.31	GTCB-300	.77
4"	GTCX-400	70.98	GTCT-400	3.10	GTCV-400	10.78	GTCE-400	1.63	GTCB-400	1.34
5"	-----	-----	-----	-----	-----	-----	GTCE-500	43.14	-----	-----
6"	GTCX-600	329.46	GTCT-600	28.86	GTCV-600	49.25	GTCE-600	8.06	GTCB-600	8.16
8"	GTCX-800	425.53	GTCT-800	39.04	GTCV-800	109.09	GTCE-800	18.46	GTCB-800	7.55
10"	GTCX-1000	464.59	GTCT-1000	47.84	GTCV-1000	112.61	GTCE-1000	55.07	GTCB-1000	-----
12"	GTCX-1200	699.62	GTCT-1200	140.64	GTCV-1200	133.60	GTCE-1200	66.72	GTCB-1200	-----

Product Code: See Part Number Prefix



800-852-1855



www.abbottrubber.com

Solid Clamp End Caps



Clamp Size	304 Stainless Steel		316L Stainless Steel	
	Part No.	List Price (ea.)	Part No.	List Price (ea.)
½" & ¾"	16AMP4-050-075	\$ 3.90	16AMP6-050-075	\$ 5.34
1" & 1½"	16AMP4-100-150	5.66	16AMP6-100-150	6.94
2"	16AMP4-200	6.21	16AMP6-200	8.96
2½"	16AMP4-250	9.34	16AMP6-250	12.96
3"	16AMP4-300	12.80	16AMP6-300	17.57
4"	16AMP4-400	23.81	16AMP6-400	33.76
5"	16AMP4-500	387.01	-----	-----
6"	16AMP4-600	93.63	16AMP6-600	113.25
8"	16AMP4-800	180.90	16AMP6-800	233.09
10"	-----	-----	16AMP6-1000	476.96
12"	-----	-----	16AMP6-1200	719.84

BEVEL SEAT SOLID END CAPS ALSO AVAILABLE

Product Code: 16AMP4 (304 S/S), 16AMP6 (316 S/S)

Tri-Clamp Dimensions

Size	Tube I.D.	Flange O.D.	Clamp Size
½"	0.370"	0.992"	¾" Clamp
¾"	0.620"	0.992"	¾" Clamp
1"	0.870"	1.984"	1½" Clamp
1½"	1.370"	1.984"	1½" Clamp
2"	1.840"	2.516"	2" Clamp
2½"	2.250"	3.047"	2½" Clamp
3"	2.750"	3.579"	3" Clamp
4"	3.834"	4.682"	4" Clamp
6"	----	6.570"	6" Clamp


→
ACTUAL SIZING
GUIDE
(SEE PAGE 51)

I.D. MEASUREMENTS ARE INDICATED IN BLUE
O.D. MEASUREMENTS ARE INDICATED IN RED



Tri-Clamp Dimensions & Sizing Guide

Tri-Clamp Sizing Guide (Actual Size)

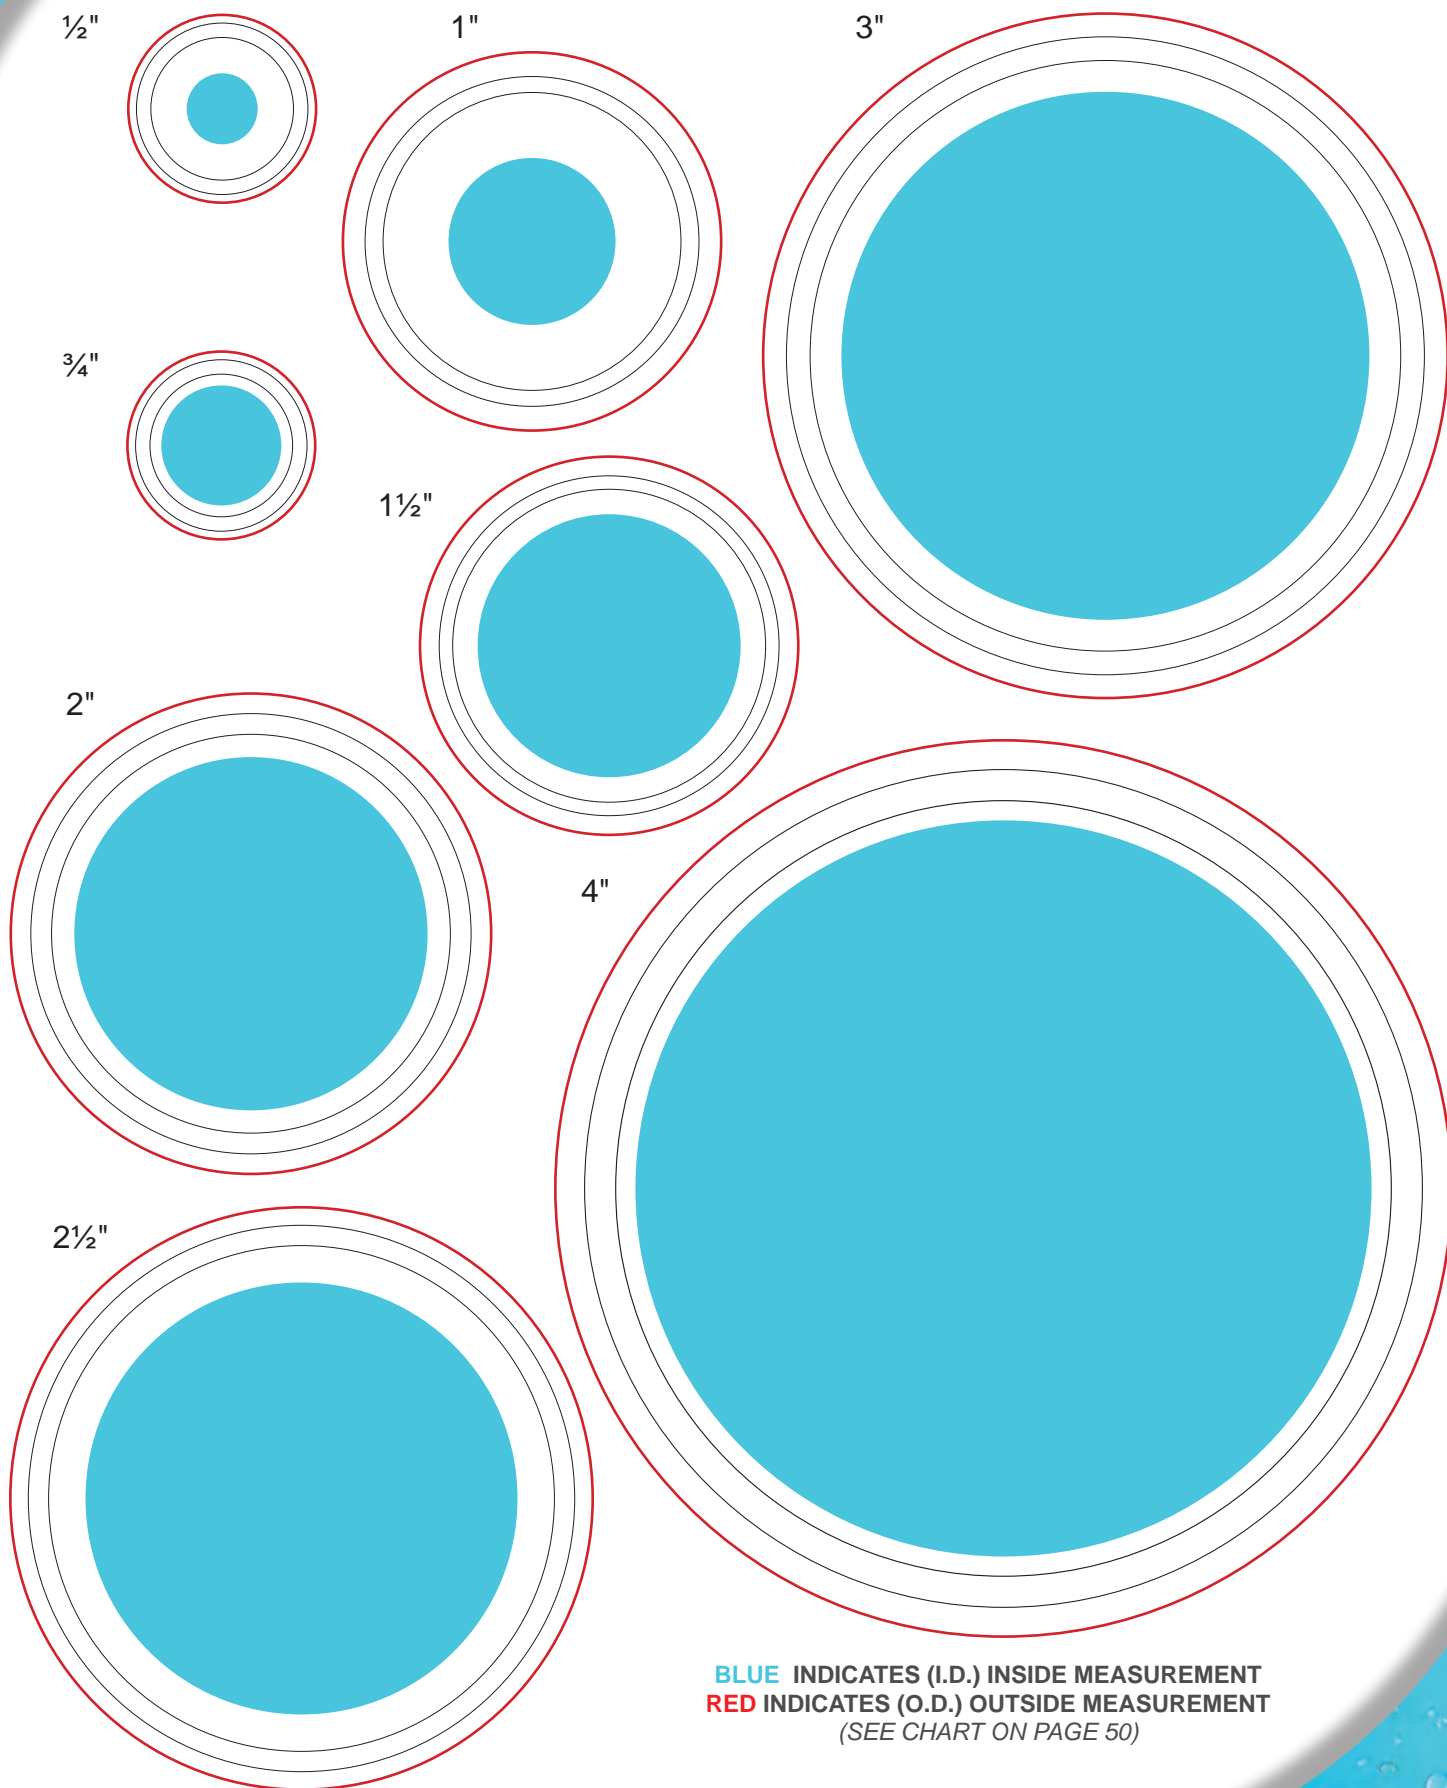

BLUE INDICATES (I.D.) INSIDE MEASUREMENT
RED INDICATES (O.D.) OUTSIDE MEASUREMENT
(SEE CHART ON PAGE 50)



White FDA Nitrile Sheet Rubber



Service/Application:

White Nitrile sheet made to Dairy 3-A and FDA grade specifications. Excellent resistance to fatty oils and other petroleum based products. Used in food, pharmaceutical, cosmetic and industrial plants where FDA grade gaskets are required. Easy cut material.

Temperature Range: -40°F to 200°F. (-40°C to 90°C)

Construction:

Non-marking, powder free, oil and age resistant, smooth finish NBR/SBR White rubber. Specification ASTM D2000: 1BF610 meets FDA requirements. 1000 PSI tensile strength.

Width (in.)	Thickness (in.)	Durometer	Lineal Weight (lbs./ft.)	Roll Length (ft.)	Part No.	List Price (lineal/ft.)
12"	1/16"	60	0.49	100	5450-0062-12	\$ 10.00
	1/8"	60	0.86	50	5450-0125-12	19.90
	3/16"	60	1.26	40	5450-0187-12	29.70
	1/4"	60	1.71	40	5450-0250-12	39.50
36"	1/16"	60	1.29	100	5450-0062-36	21.78
	1/8"	60	2.58	50	5450-0125-36	40.36
	3/16"	60	3.80	40	5450-0187-36	60.20
	1/4"	60	5.15	40	5450-0250-36	80.26

Product Code: 5450

ALSO AVAILABLE IN FDA GRADE SILICONE, URETHANE, EPDM, NEOPRENE AND PTFE. AVAILABLE IN OTHER WIDTHS AND LENGTHS. \$35.00 MINIMUM NET PRICE PER SIZE

Tan FDA Natural Gum Sheet Rubber



Service/Application:

Natural FDA rubber sheet which offers superior abrasion and tear resistance. Used in food, pharmaceutical, cosmetic and industrial plants where FDA grade gaskets are required.

Temperature Range: -20°F to 180°F. (-29°C to 82°C)

Construction:

Non-marking, powder free, tear and age resistant, smooth finish Natural NR blend Beige rubber. Specification ASTM D2000: 2AA420A13F17. Made with FDA compliant ingredients (FDA 21 CFR 177.2600 and 182.8891. 2000 PSI tensile strength.

Width (in.)	Thickness (in.)	Durometer	Lineal Weight (lbs./ft.)	Roll Length (ft.)	Part No.	List Price (lineal/ft.)
12"	1/16"	40	0.36	100	5210-0062-12	\$ 9.80
	1/8"	40	0.72	50	5210-0125-12	17.40
	3/16"	40	1.17	40	5210-0187-12	24.10
	1/4"	40	1.44	40	5210-0250-12	32.00
36"	1/16"	40	1.08	100	5210-0062-36	19.58
	1/8"	40	2.16	50	5210-0125-36	34.88
	3/16"	40	3.50	40	5210-0187-36	51.64
	1/4"	40	4.33	40	5210-0250-36	68.52

Product Code: 5450

ALSO AVAILABLE IN FDA GRADE SILICONE, URETHANE, EPDM, NEOPRENE AND PTFE. AVAILABLE IN OTHER WIDTHS AND LENGTHS. \$35.00 MINIMUM NET PRICE PER SIZE



Sanitary Couplings Selection Guide

Sanitary Hose Ends & Attachment Methods



Tri-Clamp
(w/ Sanitary Crimp Ferrule)



Tri-Clamp & Bumper
(w/ Sanitary Crimp Ferrule)



Tri-Clamp
(w/ Economy Crimp Ferrule)



Tri-Clamp & Bumper
(w/ Economy Crimp Ferrule)



Bevel Seat Male
(w/ Sanitary Crimp Ferrule)



Bevel Seat Female
(w/ Sanitary Crimp Ferrule)



Bevel Seat Male
(w/ Economy Crimp Ferrule)



Bevel Seat Female
(w/ Economy Crimp Ferrule)



I-Line Male
(w/ Sanitary Crimp Ferrule)



I-Line Female
(w/ Sanitary Crimp Ferrule)



I-Line Male
(w/ Economy Crimp Ferrule)



I-Line Female
(w/ Economy Crimp Ferrule)



John Perry Female
(w/ Sanitary Crimp Ferrule)



John Perry
(w/ Economy Crimp Ferrule)



Tube Weld End
(w/ Sanitary Crimp Ferrule)



Tube Weld End
(w/ Economy Crimp Ferrule)



Din Female
(w/ Sanitary Crimp Ferrule)



NPT Male
(w/ Economy Crimp Ferrule)



Hose Shank Coupler 'C'
(w/ Economy Crimp Ferrule)



Hose Shank Coupler 'E'
(w/ Economy Crimp Ferrule)

**OTHER END CONFIGURATIONS
& ATTACHMENT METHODS AVAILABLE**
(PLEASE CALL FOR MORE INFO)



Notes:



BREWHOSE
■ .com

Notes:



BREWHOSE
■ .com



800-852-1855



www.abbottrubber.com



ABBOTT RUBBER COMPANY, INC.

Corporate:

1700 Nicholas Boulevard
Elk Grove Village, IL 60007
P: 800.852.1855
F: 847-952-0156

Branch:

1450 Greenleaf Avenue
Elk Grove Village, IL 60007
P: 800.852.1855
F: 847-378-8151

Rockford Branch:

2335 Newburg Road
Belvidere, IL 61008
P: 815-975-9437
F: 815-975-9476

sales@abbottrubber.com

www.abbottrubber.com