


## XLT



Size Range (In) . . . . . 2" to 6"  
 Standard Length (Ft) . . . . . 25'  
 Standard Color . . . . . black  
 Temperature Range (°F) . . . . . -60° to 275°

- Very light weight thermoplastic rubber hose reinforced with a spring steel wire helix
- Excellent compressibility and flexibility
- Most compressible thermoplastic rubber hose in product line
- Designed for applications with wide temperature ranges
- Easy to install in tight spaces
- Recommended for light duty, low pressure applications
- Great moisture and UV resistance
- Excellent chemical resistance
- Wall Thickness = .012"



**A** **F**

## LT



Size Range (In) . . . . . 1.5" to 12"  
 . . . . . custom to 16"  
 Standard Length (Ft) . . . . . 25', 50'  
 . . . . . 14" and above in 25' only  
 Standard Color . . . . . black  
 Temperature Range (°F) . . . . . -60° to 275°

- Light weight thermoplastic rubber hose reinforced with a spring steel wire helix
- Excellent compressibility and flexibility
- Designed for applications with wide temperature ranges
- Great moisture and UV resistance
- Excellent chemical resistance
- Smooth interior assures minimal friction loss and efficient air flow
- Wall Thickness = .020"
- Available with factory-installed 2" black soft cuffs




**A** **F**

## HT-W



Size Range (In) . . . . . 8" to 12"  
 Standard Length (Ft) . . . . . 25'  
 Standard Color . . . . . black with yellow wearstrip  
 Temperature Range (°F) . . . . . -60° to 275°

- Heavy weight thermoplastic rubber hose reinforced with a spring steel wire helix and external polypropylene wearstrip
- Wearstrip offers additional external abrasion and drag resistance
- Suitable for more demanding positive and negative pressure applications including lawn and leaf collection
- Designed for applications with wide temperature ranges
- Great moisture and UV resistance
- Excellent chemical resistance
- Smooth interior assures minimal friction loss and efficient air flow
- Wall Thickness = .045"
- Available without external wearstrip (HT)

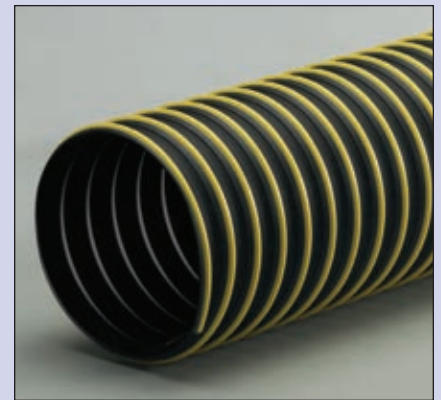

**M**

## L-Vac



Size Range (In) . . . . . 5" to 7.87"  
 Standard Length (Ft) . . . . . 10'  
 Standard Colors . . . . . orange  
 Temperature Range (°F) . . . . . -20° to 185°

- Medium weight polypropylene elastomer hose reinforced with both a plastic and a spring steel wire helix
- Vacuum lift tube fits most vacuum lift equipment
- Encapsulated high tensile steel wire provides longer life than traditional neoprene PVC wrapped constructions
- Ideally suited for use in environments requiring frequent wash downs
- Available with factory-installed heat welded cuffs for easy clamping and an air tight seal
- Available in yellow, metric sizes and 8'3" lengths, consult sales team for pricing and minimum



**A**