


# KanaDuct 630 (630 ED)

Medium-duty blower and ducting hose

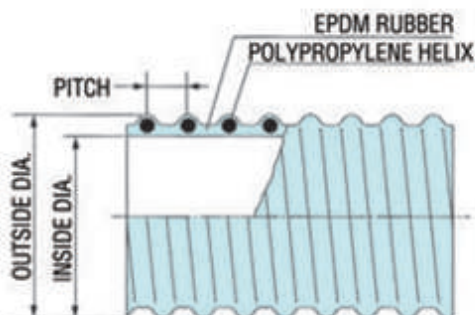

## SPECIFICATIONS

**Temp. Range:** -40°F to 158°F

**Applications:** Medium-duty blower and ducting applications such as hay baling, street refuse, grain dust, cotton pickers, wood chips, straw blowing, leaf and grass collection

**Construction:** EPDM rubber, polypropylene helix, smooth bore, corrugated O.D.

**Features:** Thicker sidewall for more abrasion resistance. External helix acts as a scuff guard. 100% rubber sidewall (no fabric).

## AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.36	0.39	3.5	—	—	0.31	50
2-1/2	2.89	0.56	3.5	—	—	0.38	50
3	3.43	0.59	4.0	—	—	0.49	50
4	4.53	0.67	4.0	—	—	0.70	50
6	6.56	0.83	6.0	—	—	1.05	50
8	8.66	0.87	8.0	—	—	1.46	50



Suction & Discharge

Cold Weather/  
Flexible

Heavy-Duty

Abrasion  
Resistance

Petroleum

Food Grade

Duct

Specialty

Accessories