


KanaPower (ST120 LT)

*Tank truck drop hose with static grounding wire;
50% lighter than conventional rubber hose*

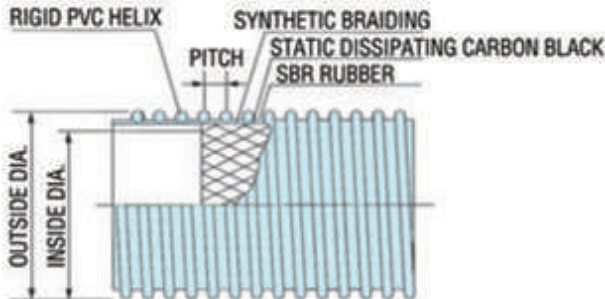

SPECIFICATIONS

Temp. Range: -30°F to 140°F

Applications: Gasoline tank truck gravity drop hose for fluids such as naphtha, kerosene, light and heavy oil, diesel and some ethanol

Construction: Nitrile rubber static dissipating tube, rigid PVC helix, synthetic braiding, smooth bore, static grounding wire, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Rated for up to 40% aromatic content.

Note: Banding sleeves or banding coils must be used for all sizes.

Static wire must be properly imbedded during fitting installation and tested to assure proper static grounding of hose to a grounded system.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.68	0.39	5.0	65	29.8	1.13	60,100
3	3.8	0.59	6.0	65	29.8	1.37	60,100
4	4.9	0.65	8.0	65	29.8	2.16	60,100

