




OIL  
RESISTANT

WATER

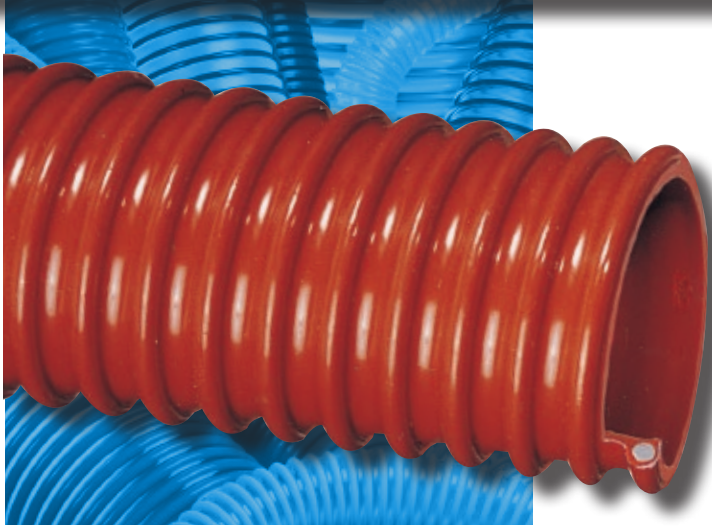

## WOR™ Series

### Standard Duty Oil Resistant PVC Suction Hose

#### General Applications:

- Environmental clean-up
- Oil skimming
- Oil slurries
- Oil suction
- Vapor recovery – hydrocarbon emissions

**Construction:** Oil resistant PVC tube with rigid PVC helix.

**Service Temperature:** 5°F (-15°C) to 150°F (+65°C)\*



#### Features and Advantages:

- **Oil Resistant PVC** – Made with special oil resistant compounds which exhibit medium resistance to oil and other hydrocarbons.
- **Convolved Outer Cover** – Provides increased hose flexibility.
- **Phthalate Free**

#### Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
					WOR150	1-1/2	38.1	1.92			
WOR200	2	50.8	2.40	61.0	40	20	28	24	4	100	0.50
WOR300	3	76.2	3.64	92.5	40	20	28	24	6	100	1.17
WOR400	4	101.6	4.72	119.9	35	18	28	22	10	100	1.74

**NOTE:** Service life may vary depending on operating conditions and type of material being conveyed.

**NOTE:** For details of the following compliances, refer to footnotes listed on page 62.

\*Actual service temperature range is application dependent.

**PHthalate FREE<sup>(09)</sup>, RoHS<sup>(10)</sup>**

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.