

700/1700/1800 SERIES

AIR COUPLERS & PLUGS
700/1700/1800 SERIES

DRIVEWAY SIGNALS
800 SERIES

PRESSURE GAGES
900 SERIES

F-R-Ls
1000/1100 SERIES

TEST EQUIPMENT
1200 SERIES

COUPLER/PLUG STYLES











- Milton® offers 11 different automotive & industrial styles
- Most styles are not interchangeable. However, couplers & plugs within the same style, from most manufacturers, will work together
- Milton's "Match-Up System" ensures that all couplers and plugs with the same letter code can be used together regardless of thread size
- Milton's 3-way couplers (page 62) simplify the process by working with A, M® & T style plugs
- Couplers & plugs are not DOT certified

AIR COUPLERS & PLUGS




MILTON® PLUG IDENTIFIER

NOTE: PLUG PROFILES
ARE ACTUAL SIZE

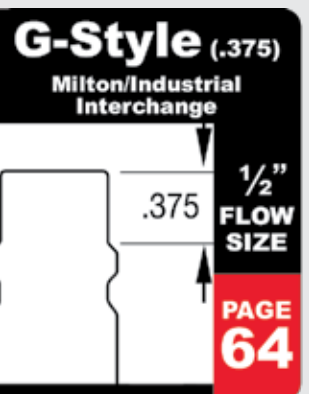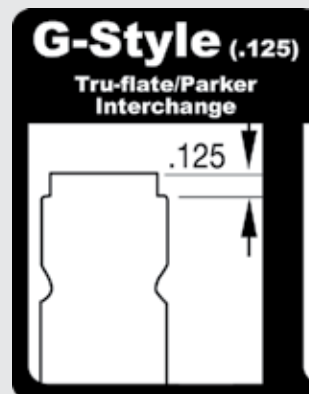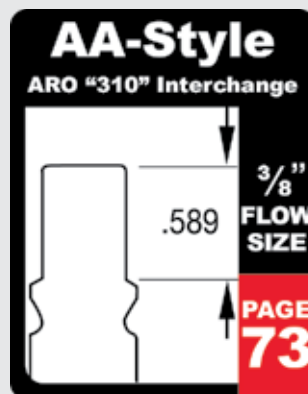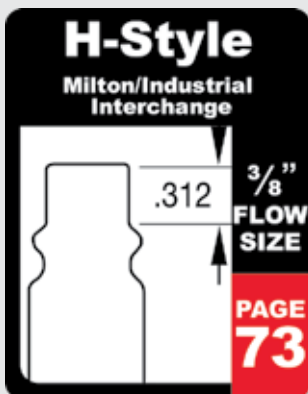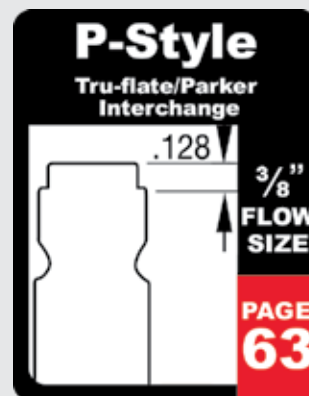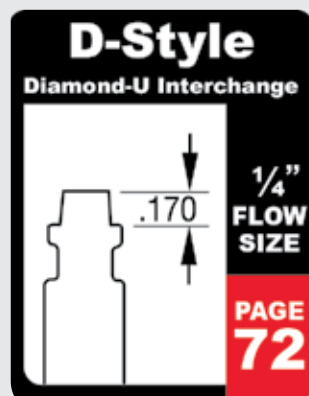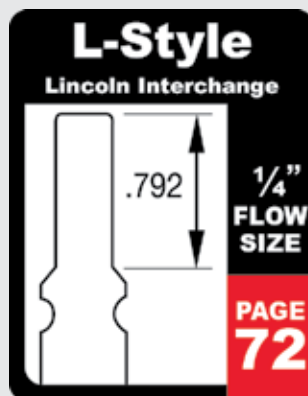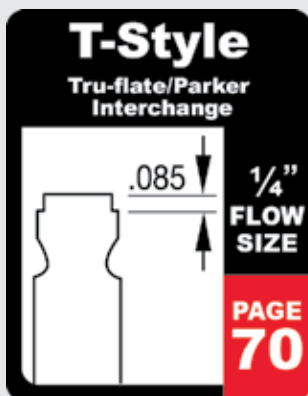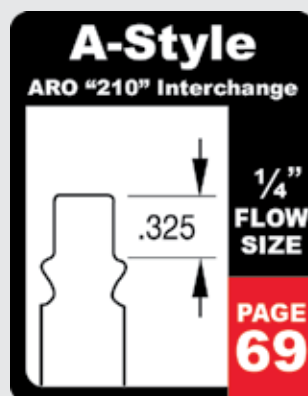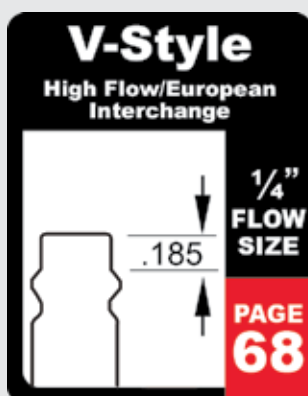

AIR HANDLING CAPACITY

- Basic Flow Size defines the air flow capacity
- Please do not confuse Basic Flow Size with Thread Size
- Thread Size is not directly related to air flow capacity in any way

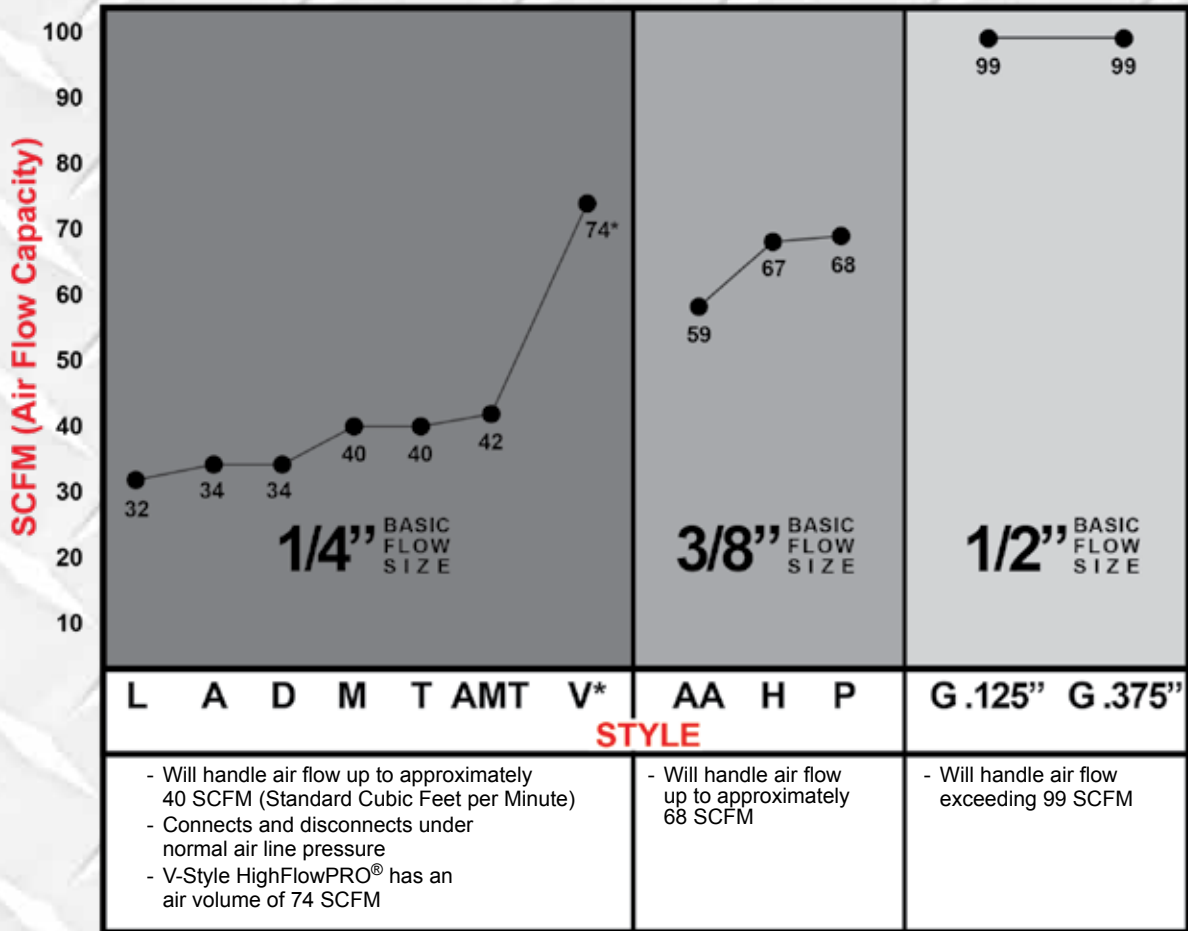

DEFINITION OF TERMS

DRAG GUARD



Protects couplers from accidental disconnection

PUSH-TYPE



Eliminates need to retract coupler sleeve to connect. Convenient and time saving option

PUSH-ON & LOCK


Push cut hose onto hose barb. Locks hose in place. Only for use with Push-On & Lock-On hose on Page 54

RE-CAP

Recap plugs screw directly onto tire valves to allow for direct coupler connection and faster pressurization

SAFETY EXHAUST COUPLERS

Connects with the five most popular plug styles

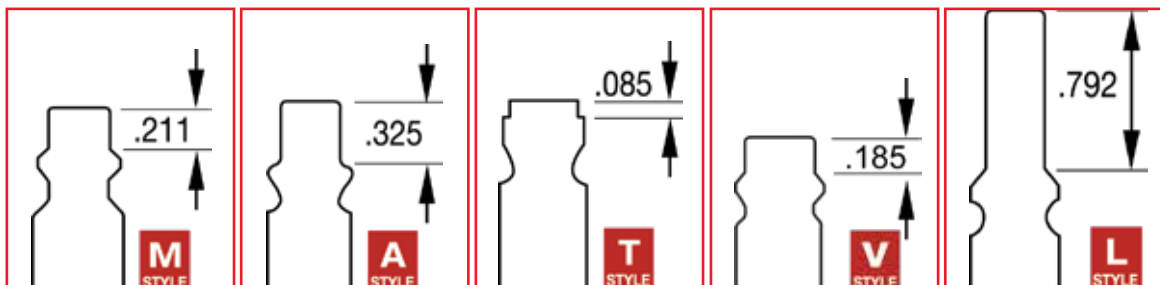

1750 • 1751 • 1752
1753 • 1754 • 1755

5 in ONE[®]

UNIVERSAL




- Push type connection - push plug into coupler to connect, pull back sleeve to release. Convenient and time saving
- Safely disengages fitting without dangerous blow-back from trapped pressure inside your air line or hose
- Heavy-duty steel design with steel plug release sleeve and aluminum safety lock sleeve

1/4" Basic Flow Size						
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Feature
1750	1750BK	s-1750	1	1/4"	Female	Push Type w/ Safety Exhaust Sleeve
1751	1751BK	s-1751	1		Male	
1752	1752BK	s-1752	1	3/8"	Female	
1753	1753BK	s-1753	1		Male	
1754	1754BK				1/4" ID Hose Barb	
1755	1755BK				3/8" ID Hose Barb	

1756 • 1757
1758 • 1759

XSC

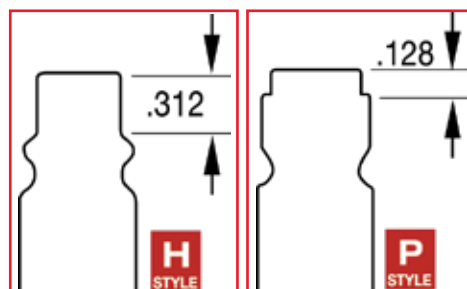

- Connects with H- and P-style 3/8" basic flow plugs
- Maximum inlet pressure: 200 PSI
- Maximum temperature: 225°F

3/8" Basic Flow Size						
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Feature
1756	1756BK	s-1756	1	1/4"	Female	Push Type w/ Safety Exhaust Sleeve
1757	1757BK	s-1757	1		Male	
1758	1758BK	s-1758	1	3/8"	Female	
1759	1759BK	s-1759	1		Male	

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE


SAFETY EXHAUST COUPLERS (cont)

1773 • 1774



1773
1774


- Connects with G-style 1/2" basic flow plugs
- Maximum inlet pressure: 200 PSI
- Maximum temperature: 225°F

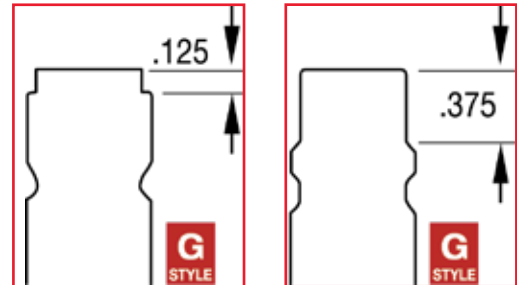

1/2" Basic Flow Size						
Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Feature
1773	1773BK	s-1773	1	1/2"	Female	Push Type w/Safety Exhaust Sleeve
1774	1774BK	s-1774	1		Male	

UNIVERSAL COUPLERS

Connects with the five most popular plug styles

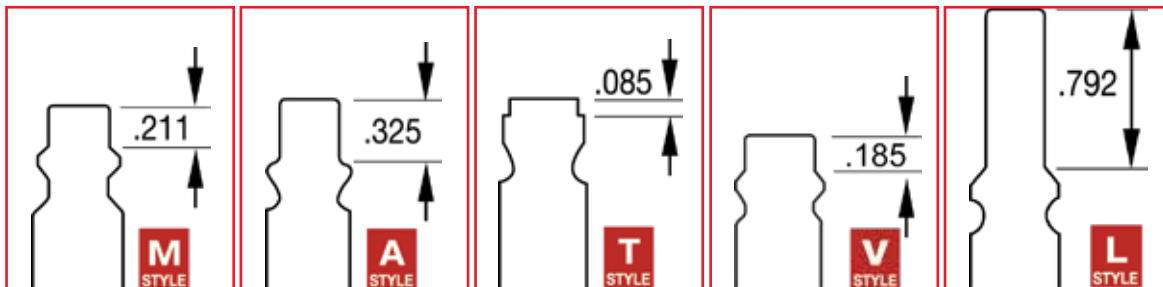

743 • 744




5 in ONE®
UNIVERSAL

- Push type connection - push plug into coupler to connect, pull back sleeve to release. Convenient and time saving
- Heavy-duty steel design
- Zinc-plated to resist rust

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body
743	743BK	s-743	1	1/4"	Female	Steel
744	744BK	s-744	1		Male	

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

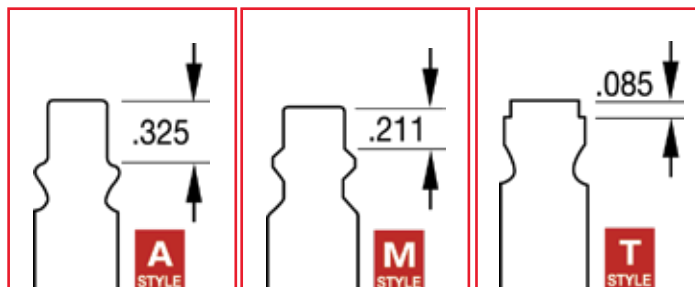

745 • 746



A-M®-T STYLE 3-WAY COUPLERS

- 1/4" basic flow size
- 3 ball bearing connection
- A-M®-T Style are push type with drag guard
- Heavy duty brass - rust resistant
- Accepts the 3 most popular 1/4" basic style plugs sold
 - Milton® or Industrial style plugs (M-Style®)
 - Aro 210-style plugs (A-Style)
 - Tru-Flate/Parker automotive style plugs (T-Style)
- Air flow: 42 SCFM



Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Product Specs Body	Sleeve	Features
745	745BK	s-745	1	1/4"	Female	Heavy Duty Brass	Heavy Duty Brass	Push-Type Drag Guard
746	746BK	s-746	1		Male			

STEEL COUPLERS & PLUGS

715ST • 716ST • 717ST 718ST • 719ST



M-Style® Steel Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Product Specs Material	Feature
715ST	715STBK	s-715ST	1	1/4"	Female	Solid Steel	Steel Drag Guard
716ST	716STBK	s-716ST	1		Male		
717ST	717STBK	s-717ST	1		1/4" ID Hose Barb		
718ST	718STBK	s-718ST	1		Female		
719ST	719STBK	s-719ST	1		Male		



764ST • 765ST 766ST • 767ST



V-Style HIGHFLOWPRO® Hi-Flow Steel Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Product Specs Material	Feature
764ST	764STBK	s-764ST	1	1/4"	Female	Solid Steel	Push-Type
765ST	765STBK	s-765ST	1		Male		
766ST	766STBK	s-766ST	1	3/8"	Female		
767ST	767STBK	s-767ST	1		Male		

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

STEEL COUPLERS & PLUGS (cont)

**785ST • 786ST
788ST • 789ST**




T-Style Steel Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Material
785ST	785STBK	s-785ST	1	1/4"	Female	Solid Steel
786ST	786STBK	s-786ST	1		Male	
788ST	788STBK	s-788ST	1	3/8"	Female	
789ST	789STBK	s-789ST	1		Male	


P-STYLE TRU-FLATE/PARKER INTERCHANGE

- 3/8" basic flow size
- 8 ball bearing connection
- P-Style couplers are heavy duty steel
- P-Style plugs are case hardened steel, plated to resist rust
- Also known as "3/8" flow T-Style"

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 68 SCFM
- Seals: Buna-N



**1803 • 1804
1805 • 1806 • 1806-6**




P-Style Steel Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body	Sleeve
1803	1803BK	s-1803	1	1/4"	Female	Heavy Duty Plated Steel	Heavy Duty Steel
1804	1804BK	s-1804	1		Male		
1805	1805BK	s-1805	1	3/8"	Female		
1806	1806BK	s-1806	1		Male		
1806-6	1806-6BK				3/8" ID Hose Barb		

SEE PG. 54 FOR PUSH-ON & LOCK HOSE

**1807 • 1807-6
1808 • 1809 • 1810**



P-Style Steel Plugs

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body	Sleeve
1809	1809BK	s-1809	2	1/4"	Female	Heavy Duty Plated Steel	Heavy Duty Steel
1810	1810BK	s-1810	2		Male		
1807	1807BK	s-1807	2	3/8"	1/4" ID Hose Barb		
1808	1808BK	s-1808	2		Female		
1807-6					3/8" ID Hose Barb		

s-1802



P-Style 3/8" Steel Coupler/Plug Kit

Kit Part No.	Kit includes (qty):	
	#1803	#1809
s-1802	1	1




WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

STEEL COUPLERS & PLUGS (cont)
G-STYLE TRU-FLATE/PARKER INTERCHANGE

There are two distinct G-Style plug profiles. Although different, both styles fully connect with all G-Style couplers

- 1/2" basic flow size
- 8 ball bearing connection
- G-Style couplers are steel, plated to resist rust
- G-Style plugs are case hardened steel, plated to resist rust
- Also known as "1/2" flow T-Style"
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 99 SCFM
- Seals: Buna-N


**1813 • 1814
1815 • 1816**

G-Style Couplers

• Accepts both .125" and .375" G-Style plugs



Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body	Sleeve
1813				3/8"	Female	Heavy Duty Plated Steel	Heavy Duty Steel
1814					Male		
1815	1815BK	s-1815	1	1/2"	Female		
1816	1816BK	s-1816	1		Male		


**1817 • 1818
1819 • 1820**

G-Style Plugs

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Material
1817	1817BK	s-1817	1	1/2"	Male	Zinc Chromate Coated Steel
1818	1818BK	s-1818	1		Female	
1819	1819BK			3/8"	Male	
1820					Female	

G-STYLE INDUSTRIAL INTERCHANGE

- 1/2" basic flow size
- G-Style couplers are steel plated to resist rust
- G-Style plugs are case hardened steel, plated to resist rust
- Also known as "1/2" flow M-Style"
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 99 SCFM
- Seals: Buna-N


**1855 • 1857 • 1858
1859 • 1860**

G-Style Steel Plugs

Boxed Part No.	Bulk Part No.	Product Specs		
		NPT (in)	Connection	Material
1855	1855BK	1/4"	Male	Case Hardened Plated Steel
1859	1859BK	3/8"		
1860				
1857	1857BK	1/2"	Male	
1858	1858BK		Female	


s-224 • s-1815-2

G-Style 1/2" Coupler/Plug Kits

Kit Part No.	Kit includes (qty):				
	#1815	#1816	#1857	#1858	#652-8
s-224	1	1	1	1	1
s-1815-2	2				




WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

M-STYLE® INDUSTRIAL INTERCHANGE


Milton® M-Style® KWIK-CHANGE® couplers and plugs will interchange with all manufacturers who comply with the dimensional requirements of military specification MIL-C-4109, AA-59439 and ISO 6150 B

- 1/4" basic flow size
- 3 ball bearing connection
- M-Style® plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 40 SCFM
- Seals: Buna-N



**707 • 713 • 714 • 715 • 716
717 • 717-6 • 718 • 719
755 • 756 • 1717-4 • 1717-6**

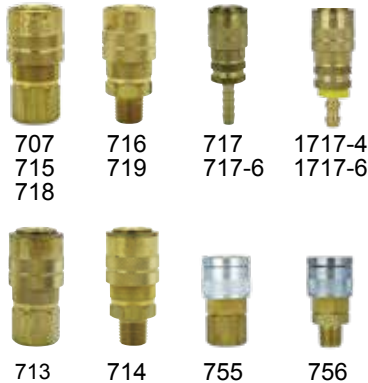

M-Style® Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	Product Specs				
				NPT (in)	Connection	Body	Sleeve	Feature
707				1/8"	Female	Solid Brass	Brass	
715	715BK	s-715	1	1/4"	Female			
716	716BK	s-716	1	1/4"	Male			
718	718BK	s-718	1	3/8"	Female			
719	719BK	s-719	1	3/8"	Male			
755	755BK	s-755	1	1/4"	Female		Steel	Steel Drag Guard & Push Type
756	756BK	s-756	1		Male			
713	713BK		1		Female		Brass	Drag Guard: Steel Sleeve Brass
714	714BK				Male			
717	717BK				1/4" ID Hose Barb			
717-6	717-6BK				3/8" ID Hose Barb			
1717-4	1717-4BK				1/4" ID Push-on & Lock Hose Barb			
1717-6	1717-6BK				3/8" ID Push-on & Lock Hose Barb			

Boxed Part No.	Description
768	Milton® Synthetic Replacement Washers*

*(Fits all M-Style® Couplers except ColorFit® Couplers)

**726 • 727 • 728 • 729
731 • 732 • 733 • 736
736-6 • 1736-4 • 1736-6**



M-Style® Plugs

SEE PG. 54 FOR PUSH-ON & LOCK HOSE

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	Product Specs		
				NPT (in)	Connection	Material
726				1/8"	Male	Case Hardened Steel
729	729BK			1/8"	Female	
727	727BK	s-727	2	1/4"	Male	
728	728BK	s-728	2	1/4"	Female	
731	731BK		2	.305-.32 Size	Female	
732	732BK	s-732	2	3/8"	Female	
733	733BK	s-733	2		Male	
736	736BK			1/4"	1/4" ID Hose Barb	
736-6	736-6BK			3/8"	3/8" ID Hose Barb	
1736-4	1736-4BK			1/4"	1/4" ID Push-on & Lock Hose Barb	
1736-6	1736-6BK			3/8"	3/8" ID Push-on & Lock Hose Barb	

**s-210 • s-210-14 • s-211
s-212 • s-312MKIT • 711
s-711 • s-715-4 • s-727-5**



M-Style® Coupler/Plug Kits

Kit Part No.	Kit includes (qty):			
	#715	#716	#727	#728
711	10		10	
s-711	1		1	
s-210	2		8	2
s-210-14	4		8	2
s-211	1		3	1
s-212	1		3	3
s-715-4	4			
s-727-5			5	
s-312MKIT	1	1	6	4



WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

M-STYLE® INDUSTRIAL INTERCHANGE (cont)
s-218


s-218

**6-pc M-Style® Coupler/Plug Kit
w/ Variable Angle Swivel Plug**

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM



Part No.	s-218
Qty	Description
1	#715 M-Style® Female Brass Coupler
3	#727 M-Style® Male Steel Plugs
1	#728 M-Style® Female Steel Plug
1	#99681-4 M-Style® Variable Angle Swivel Plug

**1/4"
NPT**
s-219


s-219

5-pc M-Style® Safety Coupler/Plug Kit

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM



Part No.	s-219
Qty	Description
3	#727 M-Style® Male Steel Plugs
1	#728 M-Style® Female Steel Plug
1	#99705 M-Style® Female Button Safety Coupler

**1/4"
NPT**
s-220


s-220

16-pc Compressor Accessory Starter Kit

- Complete starter kit of Milton® accessories needed for a multitude of compressed air functions
- Applications: Inflating and checking tire pressure, inflating sports equipment, blowing debris, mending and connecting hoses, quick connection of air tools
- Ideal for "Do-it-Yourself", small repair shop, mobile repair & maintenance



Part No.	s-220	
Qty	Description	Size
1	#148 Safety Blo Gun w/ Rubber & Venturi Tips	1/4" NPT
1	#600 Brass Male Hose End	1/4"NPT Barb x 1/4" Thread
1	#640 Brass Male Hose Mender	
1	#643 Brass Female Hex Coupling	1/4" NPT x 1/4" NPT
1	#646 Brass Male Hex Nipple	
1	#699 Female Single Head Air Chuck	
2	#715 M-Style® Female Brass Couplers	1/4" NPT
3	#727 M-Style® Male Steel Plugs	
2	#728 M-Style® Female Steel Plugs	
1	#921 Tire Pressure Gage	5-50 PSI (40-350 kPa)
1	#P148-1 Inflator Needle	1/8" NPS
1	#P148-2 Inflator Needle Adapter	

**1/4"
NPT**
s-221


s-221

**5-pc M-Style® Coupler/Plug Kit
w/ 3-in-1 Manifold**

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM



Part No.	s-221
Qty	Description
1	#685-4 3-in-1 Air Manifold - (1)1/4" inlet, (3) 1/4" outlets
3	#716 M-Style® Male Brass Couplers
1	#727 M-Style® Male Steel Plug

**1/4"
NPT**
WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

REDUCER KITS

- Reducer kits have been assembled to provide an easy and convenient method of reducing compressor outlets to smaller hose or pipe sizes
- Matching couplers and plugs are included for the reduced connection sizes
- Kits have multiple applications for customers engaged in auto body repair, automotive services, agriculture, heavy duty fleets, roofing, construction, woodworking, and metal fabricators, to name a few



s-222



s-222

5-pc M-Style® Coupler/Plug Kit w/ 3/4" to 1/4" Reducer

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM

Part No.	s-222
Qty	Description
1	#652-1 Reducer Bushing 3/4" to 1/4"
1	#715 M-Style® Female Brass Coupler
1	#716 M-Style® Male Brass Coupler
1	#727 M-Style® Male Steel Plug
1	#728 M-Style® Female Steel Plug

1/4" NPT

NYLON RE-KOIL AIR HOSE KITS

s-225 • s-230



s-225



s-230

4-pc Re-Koil Hose Safety Blo-Gun Kit

Part No.	s-225
Qty	Description
1	#148 Safety Blo-Gun w/ Rubber & Venturi Tips
1	#715 M-Style® Female Brass Coupler
1	#727 M-Style® Male Steel Plug
1	#1669 1/4" x 25' Re-Koil Air Hose



4-pc Truck Air Seat Blo-Gun Kit

Part No.	s-230
Qty	Description
1	#148 Safety Blo-Gun w/ Rubber & Venturi Tips
1	#643 1/4" x 1/4" NPT Hex Coupling
1	#2204-2 Male 1/4" x 1/4" Swivel Branch Tee Fitting
1	#1667 1/4" x 12' Re-Koil Air Hose

AIR TOOL KIT ACCESSORY KITS

s-325HKIT



s-325HKIT

25-pc Pro Recoil Air Hose Kit

- Comes with storage case
- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM



Part No.	s-325HKIT
Qty	Description
1	#148 Safety Blo-Gun w/ Rubber & Venturi Tips
1	#921 Tire Pressure Gage (5-50 PSI)
1	#690 Dual Head Air Chuck w/ 12" Extension
2	#643 1/4" x 1/4" NPT Hex Couplings
2	#646 1/4" x 3/8" NPT Male Hex Nipples
1	Blo-Gun Safety/Adapter Tip
1	s-168RUB Blo Gun Rubber Tip
1	Blo-Gun Tapered Tip
1	Tire Inflator Tip/Blo Nozzle
2	##P148-2 Sport Inflation Needles
6	#727 1/4" NPT M-Style® Male Steel Plugs
2	#728 1/4" NPT M-Style® Female Steel Plugs
1	#715 1/4" NPT M-Style® Female Brass Coupler
1	Pipe Thread Tape
1	#699 Female Single Head Air Chuck
1	#1669 1/4" x 25' Nylon Re-Koil Air Hose

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

HIGHFLOWPRO®

UP TO 75% MORE FLOW

AIR COUPLERS & PLUGS
700/1700/1800 SERIES

DRIVEWAY SIGNALS
800 SERIES

PRESSURE GAGES
900 SERIES


F-R-Ls
1000/1100 SERIES

TEST EQUIPMENT
1200 SERIES

V-STYLE HIGH FLOW/EUROPEAN INTERCHANGE

V-Style specifically designed for high volume and HVLP (High Volume Low Pressure) applications

- Provides up to 75% MORE FLOW than standard couplers
- 6 ball bearing connection
- V-Style couplers are push-type for quicker connection
- Maximum inlet pressure: 300 PSI
- 1/4" basic flow size
- Maximum temperature: 250°F
- Air flow: 74 SCFM
- Seals: Buna-N



764 • 765 • 766 • 767



V-Style HIGHFLOWPRO® Hi-Flow Couplers

Boxed Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Product Specs		
					Body	Sleeve	Feature
764	s-764	1	1/4"	Female	Brass	Brass	Push-Type
765	s-765	1		Male			
766	s-766	1	3/8"	Female			
767	s-767	1		Male			

NOTE: V-Style couplers will accept M-Style® and A-Style plugs, however to retain maximum flow use V-Style plugs

760 • 761 • 762 • 763



V-Style HIGHFLOWPRO® Hi-Flow Plugs - Brass

Boxed Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs	
				Connection	Material
760	s-760	2	1/4"	Male	Solid Brass
761	s-761	2		Female	
762	s-762	2	3/8"	Male	
763	s-763	2		Female	

NOTE: The use of brass plugs with air tools will cause damage and premature wear on the couplers and plugs

**760-1 • 761-1
762-1 • 763-1**



V-Style HIGHFLOWPRO® Hi-Flow Plugs - Steel

Boxed Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs	
				Connection	Material
760-1	s-760-1	2	1/4"	Male	Case Hardened Steel
761-1	s-761-1	2		Female	
762-1	s-762-1	2	3/8"	Male	
763-1	s-763-1	2		Female	

NOTE: Steel plugs are highly recommended for use with any type of percussion tool such as impact tools, grinders, polishers, drills, etc.

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

HIGHFLOWPRO®

UP TO 75% MORE FLOW

s-216



s-216

**2-pc V-Style HIGHFLOWPRO®
Hi-Flow Coupler/Plug Kit**

- Max inlet pressure: 300 PSI
- Air flow: 74 SCFM

Part No.	s-216
Qty	Description
1	#760-1 Male Hi-Flow Steel Plug
1	#764 Female Hi-Flow Brass Coupler



s-217



s-217

**6-pc V-Style HIGHFLOWPRO®
Hi-Flow Coupler/Plug Kit**

- Max inlet pressure: 300 PSI
- Air flow: 74 SCFM


Part No.	s-217
Qty	Description
2	#760-1 Male Hi-Flow Steel Plugs
2	#761-1 Female Hi-Flow Steel Plugs
2	#764 Female Hi-Flow Brass Couplers



A-STYLE ARO "210" INTERCHANGE

- 1/4" basic flow size
- 2 locking rod connection
- A-Style couplers are push type for quicker connection
- A-Style couplers are steel, plated to resist rust
- A-Style plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 34 SCFM
- Seals: Buna-N



775 • 776 • 776-4 • 776-6



775


776

776-4
776-6

A-Style Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Body	Sleeve	Feature
775	775BK	s-775	1	1/4"	Female	Case Hardened Plated Steel	Case Hardened Plated Steel	Push-Type
776	776BK	s-776	1		Male			
776-4					1/4" ID Hose Barb			
776-6					3/8" ID Hose Barb			

**777 • 777-4 • 777-6
778 • 1777-6**



777

778

777-4
777-6

1777-6

A-Style Plugs

SEE PG. 54 FOR PUSH-ON & LOCK HOSE

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Connection	Feature
777	777BK	s-777	2	1/4"	Male	Case Hardened Plated Steel
778	778BK	s-778	2		Female	
777-4	777-4BK				1/4" ID Hose Barb	
777-6					3/8" ID Hose Barb	
1777-6					3/8" ID Push-on & Lock Hose Barb	

s-213 • s-772 • s-775-4



s-213

A-Style 1/4" Coupler/Plug Kits

Kit Part No.	Kit includes (qty):		
	#775	#777	#778
s-213	1	3	1
s-772	1	1	
s-775-4	4		




s-772

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

T-STYLE TRU-FLATE/PARKER INTERCHANGE

- 1/4" basic flow size
- 3 ball bearing connection
- T-Style plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 40 SCFM
- Seals: Buna-N




**785 • 786 • 786-4
786-6 • 787 • 788 • 789
1786-4 • 1786-6**



785
788

786
789

787



786-4
786-6

1786-4
1786-6

T-Style Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	Product Specs			
				NPT (in)	Connection	Body	Sleeve
785	785BK	s-785	1	1/4"	Female	Solid Brass	
786	786BK	s-786	1		Male		
787	787BK				Female		Oversized Sleeve Ring
788				3/8"			
789					Male		
786-4					1/4" ID Hose Barb		
786-6					3/8" ID Hose Barb		
1786-4				1/4" ID Push-on & Lock Hose Barb			
1786-6				3/8" ID Push-on & Lock Hose Barb			

Boxed Part No.	Description
768	Milton® Synthetic Replacement Washers*

*(Fits all T-Style Couplers except ColorFit® Couplers)

SEE PG. 54 FOR PUSH-ON & LOCK HOSE

779 • 783 • 784 • 1783-6



779

783

784

1783-6

T-Style Plugs

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Material
783	783BK	s-783	2	1/4"	Male	Case Hardened Plated Steel
784	784BK	s-784	2		Female	
779						
1783-6				.305-.32 Size	3/8" ID Push-on & Lock Hose Barb	

s-215 • s-782



s-215

T-Style 1/4" Coupler/Plug Kits

Kit Part No.	Kit includes (qty):		
	#785	#783	#784
s-215	1	3	1
s-782	1	1	



s-782

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

ColorFit®

Color Connect System

Clearly distinguish air lines with color

- Easily match plugs to couplers
 - Durable steel sleeve design* outlasts the competition
 - Proprietary hard anodizing lasts longer
- *Patent pending




AIR COUPLERS & PLUGS
700/1700/1800 SERIES

DRIVEWAY SIGNALS
800 SERIES

PRESSURE GAGES
900 SERIES

F-R-Ls
1000/1100 SERIES


TEST EQUIPMENT
1200 SERIES

**M-STYLE®**


Basic Flow Size:	1/4"
NPT:	1/4"
Max Pressure:	300 PSI
Ball Bearing Connection:	4

**V-STYLE**

Basic Flow Size:	1/4"
NPT:	1/4"
Max Pressure:	300 PSI
Ball Bearing Connection:	6

**A-STYLE**

Basic Flow Size:	1/4"
NPT:	1/4"
Max Pressure:	300 PSI
Ball Bearing Connection:	4

**T-STYLE**

Basic Flow Size:	1/4"
NPT:	1/4"
Max Pressure:	300 PSI
Ball Bearing Connection:	4

ColorFit® Coupler & Plug Kits

Part No.	Description	Kit Contents			
		Male Coupler	Female Coupler	Male Plug	Female Plug
s-303MKIT	3 pc. Milton® ColorFit® M-Style® Coupler & Plugs Kit		1	1	1
s-305MKIT	5 pc. Milton® ColorFit® M-Style® Couplers & Plugs Kit		1	3	1
s-307MKIT	7 pc. Milton® ColorFit® M-Style® Couplers & Plugs Kit	1	1	3	2
s-314MKIT	14 pc. Milton® ColorFit® M-Style® Couplers & Plugs Kit	2	2	6	4
s-303VKIT	3 pc. Milton® ColorFit® HighFlowPRO® Hi-Flow V-Style Couplers & Plugs Kit		1	1	1
s-314VKIT	14 pc. Milton® ColorFit® HighFlowPRO® Hi-Flow V-Style Couplers & Plugs Kit	2	2	6	4
s-314AKIT	14 pc. Milton® ColorFit® A-Style Couplers & Plugs Kit	2	2	6	4
s-307TKIT	7 pc. Milton® ColorFit® T-Style Couplers & Plugs Kit	1	1	3	2
s-314TKIT	14 pc. Milton® ColorFit® T-Style Couplers & Plugs Kit	2	2	6	4

**3 PC Kit****7 PC Kit****14 PC Kit****ColorFit® Bulk Couplers & Plugs**

	Part No.	Description	Kit Contents			
			Male Coupler	Female Coupler	Male Plug	Female Plug
M-STYLE®	715MC	10 pc. Milton® ColorFit® M-Style® Bulk Female Couplers		10		
	716MC	10 pc. Milton® ColorFit® M-Style® Bulk Male Couplers	10			
	727MC-20	20 pc. Milton® ColorFit® M-Style® Bulk Male Plugs			20	
	728MC-20	20 pc. Milton® ColorFit® M-Style® Bulk Female Plugs				20
V-STYLE	764VC	10 pc. Milton® ColorFit® HighFlowPRO® V-Style Bulk Female Couplers		10		
	765VC	10 pc. Milton® ColorFit® HighFlowPRO® V-Style Bulk Male Couplers	10			
	760VC-20	20 pc. Milton® ColorFit® HighFlowPRO® V-Style Bulk Male Plugs			20	
	761VC-20	20 pc. Milton® ColorFit® HighFlowPRO® V-Style Bulk Female Plugs				20
A-STYLE	775AC	10 pc. Milton® ColorFit® A-Style Bulk Female Couplers		10		
	776AC	10 pc. Milton® ColorFit® A-Style Bulk Male Couplers	10			
	777AC-20	20 pc. Milton® ColorFit® A-Style Bulk Male Plugs			20	
	778AC-20	20 pc. Milton® ColorFit® A-Style Bulk Female Plugs				20
T-STYLE	785TC	10 pc. Milton® ColorFit® T-Style Bulk Female Couplers		10		
	786TC	10 pc. Milton® ColorFit® T-Style Bulk Male Couplers	10			
	783TC-20	20 pc. Milton® ColorFit® T-Style Bulk Male Plugs			20	
	784TC-20	20 pc. Milton® ColorFit® T-Style Bulk Female Plugs				20


**764VC****728MC-20**

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

L-STYLE LINCOLN INTERCHANGE

- 1/4" basic flow size
- 3 ball bearing connection
- L-Style couplers are push type for quicker connection
- L-Style couplers are steel, plated to resist rust
- L-Style plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 32 SCFM
- Seals: Buna-N



790 • 794



L-Style Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body	Sleeve Release
790	790BK	s-790	1	1/4"	Female	Plated Steel	Push-Type
794		s-794	1		Male		

791 • 792




L-Style Plugs

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Material
791	791BK	s-791	2	1/4"	Male	Case Hardened Plated Steel
792	792BK	s-792	2		Female	

D-STYLE DIAMOND-U INTERCHANGE

- 1/4" basic flow size
- 3 ball bearing connection
- D-Style couplers are steel, plated to resist rust
- D-Style plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 34 SCFM
- Seals: Buna-N



795 • 796



D-Style Couplers

Boxed Part No.	NPT (in)	Product Specs Connection	Body
795	1/4"	Female	Plated Steel
796		Male	

797 • 798



D-Style Plugs


Boxed Part No.	NPT (in)	Product Specs Connection	Body
797	1/4"	Male	Case Hardened Plated Steel
798		Female	

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

H-STYLE INDUSTRIAL INTERCHANGE

- 3/8" basic flow size
- 6 ball bearing connection
- H-Style couplers are steel, plated to resist rust
- H-Style plugs are case hardened steel, plated to resist rust
- Also known as "3/8" flow M-Style®"

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 67 SCFM
- Seals: Buna-N




**1796-6 • 1833 • 1834
1835 • 1836 • 1836-6**



H-Style Couplers

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body
1833	1833BK	s-1833	1	1/4"	Female	Plated Steel
1834	1834BK	s-1834	1		Male	
1835	1835BK	s-1835	1	3/8"	Female	
1836	1836BK	s-1836	1		Male	
1836-6					3/8" ID Hose Barb	
1796-6	1796-6BK				3/8" ID Push-on & Lock Hose Barb	

**1797-6 • 1837 • 1837-6
1838 • 1839 • 1840**

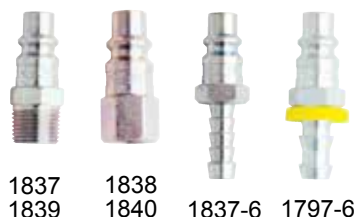

H-Style Plugs

SEE PG. 54 FOR PUSH-ON & LOCK HOSE

Boxed Part No.	Bulk Part No.	Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Material
1839	1839BK	s-1839	2	1/4"	Male	Case Hardened Plated Steel
1840	1840BK	s-1840	2		Female	
1837	1837BK	s-1837	2	3/8"	Male	
1838	1838BK	s-1838	2		Female	
1837-6	1837-6BK				3/8" ID Hose Barb	
1797-6					3/8" ID Push-on & Lock Hose Barb	

s-223 • s-1835-4



H-Style 3/8" Coupler/Plug Kits


Kit Part No.	Kit includes (qty):				
	#1835	#1836	#1837	#1838	#652-4
s-223	1	1	1	1	1
s-1835-4	4				



AA-STYLE ARO "310" INTERCHANGE

- 3/8" basic flow size
- AA-Style couplers are push type
- AA-Style coupler bodies are heavy duty steel
- AA-Style plugs are case hardened steel, plated to resist rust

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- Air flow: 59 SCFM
- Seals: Buna-N



1875



AA-Style Couplers

Boxed Part No.	NPT (in)	Product Specs Connection	Body	Feature
1875	3/8"	Female	Heavy Duty Steel	Push Type

1877 • 1878



AA-Style Plugs

Boxed Part No.	NPT (in)	Product Specs Connection	Body
1877	3/8"	Male	Case Hardened
1878		Female	Plated Steel



WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

AIR COUPLERS/PLUGS CROSS REFERENCE

With the Milton® "Match-up system" all couplers and plugs with same letter code (on face of skin-card) can be used together regardless of thread sizes. Milton® M-Style® "KWIK-CHANGE®" couplers and plugs will INTERCHANGE with all manufacturers who comply with the dimensional requirements of military specification MIL-C-4109

MILTON®	AMFLO	ARO	CAMEL	COIL HOSE	DIXON 1	DIXON 2	HANSEN	NAPA	PARKER	TRU-FLATE	MILTON®
M-STYLE®			INDUSTRIAL			1/4" BASIC FLOW SIZE			PAGE 62 & 65		
715	C20B	MSCF22-000	61-573	150	DC20B	2FF2-B	1000	90-670	B23	13-235	715
715ST	C20			150S	DC20	2FF2					715ST
716	C21B	MSCM22-000	61-574	152	DC21B	2FM2-B	1100	90-672	B22	13-224	716
716ST	C21			152S	DC21	2FM2					716ST
717	C20-42	MSCH22-000	61-575	153	DC2042	2DS2	1600	90-671	B20-3B	13-264	717
717-6	C20-44	MSCH23-000	61-720	156	DC2044	2DS3	1700		B20-5B	13-266	717-6
718	C20-23	MSCF23-000	61-718	151	DC2023	2DF3	1200	90-667	B23E	13-236	718
719	C21-03	MSCM23-000	61-716	155	DC2103	2DF4	1300	90-657	B22E	13-226	719
726	CP21-01	23902-110		1504	DC2101	D2M1	12	90-675	H0C		726
727	CP21	23902-210	61-578	1501	DCP21	D2M2	10	90-674	H2C	12-224/12-225	727
728	CP20	23902-200	61-579	1502	DCP20	D2F2	11	90-676	H3C	12-234/12-235	728
729	CP20-21	23902-100		1509	DCP2021	D2F1	13	90-665	H1C		729
732	CP20-23	23902-300		1505	DCP2023	D2F3	15	90-659	H3C-E	12-236	732
733	CP21-03	23902-310	61-535	1503	DCP2103	D2M3	14	90-677	H2C-E	12-226	733
736	CP21-42	23902-220	61-576	1506	DCP2142	D2S2	16	90-673	H8C	12-264	736
736-6	CP21-44	23902-420		1508	DCP2144	D2S3	17		H9C	12-266	736-6
755	C40B	MSCF22-X00	61-013		DCB20			90-615	B33	13-755	755
756	C41B	MSCM22-X00	61-011		DCB21			90-617	B32	13-756	756
1717-4	C20-42L	MSCP22-000		153L	DC20-42L		1600P		B20-3BP		1717-4
1717-6	C20-44L	MSCP23-000		156L	DC20-44L		1700P		B20-5BP		1717-6
1736-4	CP21-42L	23902-227		1506L	DCP21-42L		16P		H8CP		1736-4
1736-6	CP21-44L	23902-228		1508L	DCP21-44L		17P		H9CP		1736-6
V-STYLE			HIGH FLOW/EUROPEAN			1/4" BASIC FLOW SIZE			PAGE 62 & 68		
760						CJ2M2-B			RF-254-4MP		760
760-1	CP91			1101		CJ2M2-LG			RF-254-4MP		760-1
761						CJ2F2-B			RF-254-4FP		761
761-1	CP90			1102		CJ2F2-LG			RF-254-4FP		761-1
762						CJ2M3-B			RF-254-6MP		762
762-1				1103		CJ2M3-LG			RF-254-6MP		762-1
763						CJ2F3-B			RF-254-6FP		763
763-1				1105		CJ2F3-LG			RF-254-6FP		763-1
764	C90			110		2CJF2-B			RF-251-4FP		764
765	C91			112		2CJM2-B			RF-251-4MP		765
766				111		2CJF3-B			RF-251-6FP		766
767						2CJM3-B			RF-251-6MP		767
A-STYLE			ARO 210			1/4" BASIC FLOW SIZE			PAGE 69		
775	C38, C46	210	61-518, 61-526	140,140S	DC38	2MF2-B	20AS-25F	90-613	B53	13-334/13-335	775
776	C37, C45	210-212	61-527, 61-581	142,142S	DC37	2MM2-B			B50	13-324/13-325	776
776-4	C38-42	210-022		143	DC3842	2MS2-B	20AS-25H	90-679	B50-3BP		776-4
776-6	C38-44	210-215			DC3844	2MS3-B	20AS-37H		B50-5BP		776-6
777	CP37	2608	61-528	1401	DCP37	2MF2	20AP-25M	90-618	A2C	12-324/12-325	777
777-4	CP37-42	3946		1406	DCP3742	M2S2	20AP-25H		A8C		777-4
777-6	CP37-44	22238		1408	DCP3744	M2S3					777-6
778	CP38	2609	61-529	1402	DCP38	M2F2	20AP-25F	90-620	A3C	13-334/12-335	778
1777-6	CP37-44L										1777-6
T-STYLE			TRU-FLATE/PARKER			1/4" BASIC FLOW SIZE			PAGE 63 & 70		
783	CP1	TFPM22-000	61-538	1601	DCP1	J2M2	21AP-25M	90-628	2C	12-124/12-125	783
783-4	CP1-42	TFPH22-000		1606	DCP142	J2S2	21AP-25H	90-630	8C	12-117	783-4
784	CP2	TFPF22-000	61-539	1602	DCP2	J2F2	21AP-25F	90-600	3C	12-134/12-135	784
785	C2B	TFCF22-000	61-523	160	DC2	2JF2-B	B21QS-25F	90-610	B13	13-134/13-135	785
785ST	C2			160S							785ST
786	C1B	TFCM22-000	61-524	162	DC1	2JM2-B	B21QS-25M	90-607	B12	13-124/13-125	786
786ST	C1			162S							786ST
786-4	C2-42	TFCH22-000		163	DC242	2JS2-B	B21QS-25H	90-611	B10-3B	13-164	786-4
786-6	C2-44	TFCH23-000		166	DC244	2JS3-B	B21QS-37H	90-609	B10-5B		786-6

AIR COUPLERS/PLUGS CROSS REFERENCE

MILTON®	AMFLO	ARO	CAMEL	COIL HOSE	DIXON 1	DIXON 2	HANSEN	NAPA	PARKER	TRU-FLATE	MILTON®
T-STYLE (cont)			TRU-FLATE/PARKER			1/4" BASIC FLOW SIZE				PAGE 63 & 70	
787	C2R		61-487, 61-545							13-136/13-137	787
788	C2-32	TFCF23-000	61-704	161		2JF3-B				13-138	788
789	C1-03	TFCM23-000		165	DC103	2JM3-B					789
1783-6	CP1-44L	TFPP23-000		1608L		J2B3	N/A		9CP		1783-6
1786-4	C2-42L	TFCH22-000		163L		2JB2-B	B21QS-25HP		B10-3BP		1786-4
1786-6	C2-44L	TFCH23-000		166L		2JB3-B	B21QS-37HP		B10-5BP		1786-6
L-STYLE			LINCOLN			1/4" BASIC FLOW SIZE				PAGE 72	
790	C28	LNCF22-000	61-548	170	DC28	2LF2-B	N/A	90-644	B73	13-434/13-435	790
791	CP27	LNPM22-000	61-550	1701	DCP27	L2M2	N/A	90-648	L2C	12-424/12-425	791
792	CP28	LNPF22-000	61-551	1702	DCP28	L2F2	N/A	90-650	L3C	12-434/12-435	792
794	C27	LNCM22-000	61-486	172	DC27	2LM2-B	N/A	90-645	B72	13-424/13-425	794
P-STYLE			TRU-FLATE/PARKER			3/8" BASIC FLOW SIZE				PAGE 63	
1746-6	C6-44L	TFPC23-000		598L		3JB2	32QS-37HP		14-5BP		1746-6
1747-6	CP5-44L	TFPP23-000		5906L		J3B3	N/A		5EP		1747-6
1803	C8	TFCF32-000	61-476	592	DC8	3JF2	32QS-25F	90-686	15C	13-610/13-611	1803
1804	C7	TFCM32-000	61-478	593	DC7	3JM2		90-684		13-602	1804
1805	C6	TFCF33-000	61-553	590	DC6	3JF3	32QS-37F	60-654	15	13-612/13-613	1805
1806	C5	TFCM33-000	61-554	591	DC5	3JM3	32QS-37M	90-656	14	13-604	1806
1806-6	C6-44	TFCH33-000		598	DC644	3JS3	32QS-37H	90-521	14-5B	13-666	1806-6
1807	CP5	TFPM33-000	61-558	5901	DCP5	J3M3	31AP-37M	90-658	2E	12-604/12-605	1807
1807-6	CP5-44	TFPH33-000		5906	DCP544	J3S3	31AP-37H	90-530	5E		1807-6
1808	CP6	TFPF33-000	61-559	5902	DCP6	J3F3	31AP-37F	90-660	3E	12-612	1808
1809	CP7	TFPM32-000	61-480	5903	DCP7	J3M2	31AP-25M	90-685	0E	12-602/12-603	1809
1810	CP8	TFPF32-000	61-481	5904	DCP8	J3F2	31AP-25F	90-687	1E	12-610	1810
H-STYLE			INDUSTRIAL			3/8" BASIC FLOW SIZE				PAGE 73	
1796-6	C26-44L	MSCP33-000		586L		3FB3			24-5BP		1796-6
1797-6	CP25-44L	23903-28		5806L		D3B3			H5EP		1797-6
1833	C26-22	MSCM32-000		582	DC2622	3FF2	400	90-629	25C		1833
1834	C25-02			583		3FM2		90-625			1834
1835	C26	NSCF33-000	61-482	580	DC26	3FF3	420	90-680	25	13-536/13-537	1835
1836	C25-02	MSCM33-000	61-483	581	DC25	3DF3	430	90-682	24	13-526/13-527	1836
1836-6	C26-44L	MSCH33-000		586	DC2644	3FS3	4006	90-635	24-6B		1836-6
1837	CP25	23903-310	61-484	5801	DCP25	D3M3	42	90-683	H2E	12-526/12-527	1837
1837-6	CP25-44	23903-420		5806	DCP2544	D3S3	406	90-651	H5EP		1837-6
1838	CP26	23903-300	61-485	5802	DCP26	D3F3	43	90-681	H3E	12-536/12-537	1838
1839	CP25-02	23903-210		5803	DCP2502	D3M2	40	90-605	H0E	12-525	1839
1840	CP26-22	23903-200		5804	DCP2622	D3F2	41	90-606	H1E	12-535	1840
AA-STYLE			ARO 310			3/8" BASIC FLOW SIZE				PAGE 73	
1875	C36	310			DC36	3MF3-PL					1875
1877	CP35	3804			DCP35	M3M3					1877
1878	CP36	3806			DCP36	M3F3					1878
G-STYLE			TRU-FLATE/PARKER			1/2" BASIC FLOW SIZE				PAGE 64	
1813	C10-23	TFCF43-000	61-472	123	DC1023	4DF3	500	90-690	17E	13-710	1813
1814	C9-03	TFCM43-000		121	DC903	4DM3	510	90-688	16E	13-702	1814
1815	C10-23	TFCF44-000	61-563	120	DC10	4DF4	520	90-662	B37	13-712/13-713	1815
1816	C9-03	TFCM44-000	61-564	122	DC9	4DM4	530	90-664	B36	13-704	1816
1817	CP9	TFPM44-000	61-568		DCP9		54	90-666	2F	12-704/12-705	1817
1818	CP10	TFPF44-000	61-569		DCP10		55	90-668	3F	12-712	1818
1819	CP9-03	TFPM43-000	61-474		DCP903		52	90-689	0F	12-702	1819
1820	CP10-23	TFPF43-000	61-475		DCP1023		53	90-691	1F	12-710	1820
G-STYLE			INDUSTRIAL			1/2" BASIC FLOW SIZE				PAGE 64	
1857	CP17	23904-410	61-134	1201	DCP17	D4M4	54	90578	H2F	12-752	1857
1858	CP18	23904-400	61-137	1202	DCP18	D4F4	55	90588	H3F	12-762	1858
1859	CP17-03	23904-310	61-133	1203	DCP1703	D4M3	52	90-575	H0F		1859
1860	CP18-23	23904-3	61-136	1204	DCP1823	D4F3	53	90-587	H1F		1860

STRAIGHT THRU PRESSURE WASHER COUPLERS & PLUGS**Application: high pressure washers & industrial carpet cleaning**

- **Warning:** Straight thru couplers are not to be used in hydraulic applications
- Straight thru couplers are brass with stainless steel balls and spring
- 1/4" couplers - 6 ball bearing connection
- 3/8" couplers - 8 ball bearing connection
- Straight thru plugs are case hardened steel, plated to resist rust
- Compatible with other major manufacturers of straight thru couplers

**1761 • 1762**

1761

1762

Straight Thru Couplers

Boxed Part No.	Bulk Part No.	NPT (in)	Product Specs Connection	Body	Maximum Air Pressure
1761	1761BK	1/4"	Female	Solid Brass, Stainless Steel Balls and Spring	5200 PSI
1762			Male		

1763 • 1764 • 1767 • 1768

1763

1764

1767

1768

Straight Thru Plugs

Boxed Part No.	Bulk Part No.	NPT (in)	Product Specs Connection	Body	Maximum Air Pressure
1763		1/4"	Male	Case Hardened Plated Steel	5200 PSI
1764	1764BK		Female		
1767	1767BK	3/8"	Male		2700 PSI
1768			Female		

PUSH BUTTON SAFETY COUPLERS

- 1/4" basic flow size
- Push button design - press once to stop airflow, press again to release plug from coupler
- Max air flow: 36 SCFM
- Easy to identify style with color coded push buttons

s-99705 • s-99706s-99705
s-99706**M-Style® Safety Couplers**

Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body
s-99705	1	1/4"	Female	Impact Resistant Composite
s-99706	1		Male	

s-99773 • s-99774s-99773
s-99774**A-Style Safety Couplers**

Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body
s-99773	1	1/4"	Female	Impact Resistant Composite
s-99774	1		Male	

s-99787

s-99787

T-Style Safety Couplers

Retail Part No.	Per Card	NPT (in)	Product Specs Connection	Body
s-99787	1	1/4"	Female	Impact Resistant Composite

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE

TWIST-LOCK UNIVERSAL COUPLERS

- **Warning:** Twist lock couplers are not for steam or hydraulic applications
- Commonly used with jack hammer hoses
- Twist lock couplers are made from malleable iron
- Commonly referred to as "Crowfoot", "Claw" type or "Chicago" couplers
- Milton® twist lock couplers come complete with safety clip and lanyard
- Maximum working pressure: 150 PSI
- Maximum temperature: 160°F
- 1860 series Universal/Chicago style coupler 1/4" to 1" couplings can be used with each other. 1 1/4", 1 1/2" and 2" cannot be used with the smaller sizes
- Application: Construction, highway maintenance, mobile compressors, mining, agriculture

1862 • 1863 • 1864



1862
1862-6
1862-8



1862-10
1862-14



1863
1863-6
1863-8



1864
1864-6
1864-8



1864-10

Boxed Part No.	NPT (in)	Product Specs Connection	Body	Number of Claws
1862-6	1/2"	Hose Barb (Hose ID)	Malleable Iron	2
1862-8	3/4"			
1862	1"			
1862-10	1 1/4"			
1862-14	2"			
1863-6	1/2"	Male NPT	Malleable Iron	2
1863-8	3/4"			
1863	1"			
1864-6	1/2"	Female NPT	Malleable Iron	2
1864-8	3/4"			
1864	1"			
1864-10	1 1/4"			

SEE JACKHAMMER HOSE ON PG. 55

1865-1 • 1865-3 • 1865-4



1865-1



1865-3
1865-4

Replacement Parts

Boxed Part No.	For use with:	Description	Fits Sizes
1865-1	Twist Lock	Safety Clip	
1865-3	Universal	Rubber Replacement	1/4" to 1"
1865-4	Couplers	Grommet	1 1/4" to 2"

HYDRAULIC COUPLERS

3/8" High Flow Hydraulic Coupling (M42)

This 3/8" FNPT high flow coupling, with its threaded union locking system and precision check valves, is designed for extreme high-pressure applications, such as portable hydraulic jacks. Our couplings include a dust cap for protection against dust and debris when not in use and are ISO 14540 compliant

M42-06HFCFP
M42-06HFCMP
M42-06HFCSP

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M42-06HFCFP	3/8"	Female	Poppet	9.25	10,000	YES
M42-06HFCMP		Male				
M42-06HFCSP		Complete Set (M & F)				



Flush Face Hydraulic Couplings (M43, M47, M48)

Flush face couplers are widely used in the public utility market where hydraulic oil spillage can be a serious safety hazard. These couplers are used for the quick change of hydraulic tools in a variety of industries. Our couplings include a dust cap for protection against dust and debris when not in use and are ISO 16028 compliant

M43-06FFCF
M43-06FFCM
M43-06FFCS

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M43-06FFCF	3/8"	Female	Flush Face	5.9	5,000	YES
M43-06FFCM		Male				
M43-06FFCS		Complete Set (M & F)				



M47-12FFCF
M47-12FFCM
M47-12FFSF

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M47-12FFCF	3/4"	Coupler	Flush Face	28.0	5,000	YES
M47-12FFCM		Plug				
M47-12FFSF		Complete Set (M & F)				



M48-08FFCF
M48-08FFCM
M48-08FFCS

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M48-08FFCF	1/2"	Coupler	Flush Face	12.0	5,000	YES
M48-08FFCM		Plug				
M48-08FFCS		Complete Set (M & F)				



**M44-06SPCFP
M44-06SPCMP
M44-06SPCSP**



3/8" Speedy Hydraulic Coupling (M44)

These 3/8" FNPT quick-connect speedy couplers and plugs are suitable for medium-duty applications. They quickly allow the disconnection and reconnection of your equipment from our coupler, maximizing your efficiency in all aspects. Our speedy coupling would typically be used in a situation where the coupling needs to be changed out one or more times a week. This coupling is ISO 14540 compliant

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M44-06SPCFP	3/8"	Female	Poppet	5.9	10,000	YES
M44-06SPCMP		Male				
M44-06SPCSP		Complete Set (M & F)				

**M45-04RFCFB
M45-04RFCMB
M45-04RFCSB**



1/4" Regular Flow Hydraulic Coupling (M45)

This 1/4" FNPT regular flow coupling is used for the quick disconnection and reconnection of hydraulic lines and comes with a ball valve providing a metal-to-metal seal between the ball and coined seat. This coupling is ISO 14540 compliant and is machined from solid steel barstock for durability

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M45-04RFCFB	1/4"	Female	Ball	2.9	10,000	YES
M45-04RFCMB		Male				
M45-04RFCSB		Complete Set (M & F)				

**M46-04SOCFB
M46-04SOCMB
M46-04SOCB**



1/4" Spin-On Hydraulic Coupling (M46)

This 1/4" FNPT Spin-On hydraulic coupling is for use with torque wrenches and has a locking ball valve. Our couplings include a dust cap for protection against dust and debris when not in use. The interface seal on this coupling is polyurethane, which resists high pressure extrusion, and is ISO 14540 compliant

Part No.	Size NPT	Connection	Valve Type	Capacity (GPM)	Operating PSI	Dust Cap?
M46-04SOCFB	1/4"	Female	Ball	2.9	10,000	YES
M46-04SOCMB		Male				
M46-04SOCB		Complete Set (M & F)				