


# Compressed Air



## T903LE 150 PSI High Quality FDA Hot Air Blower Hose

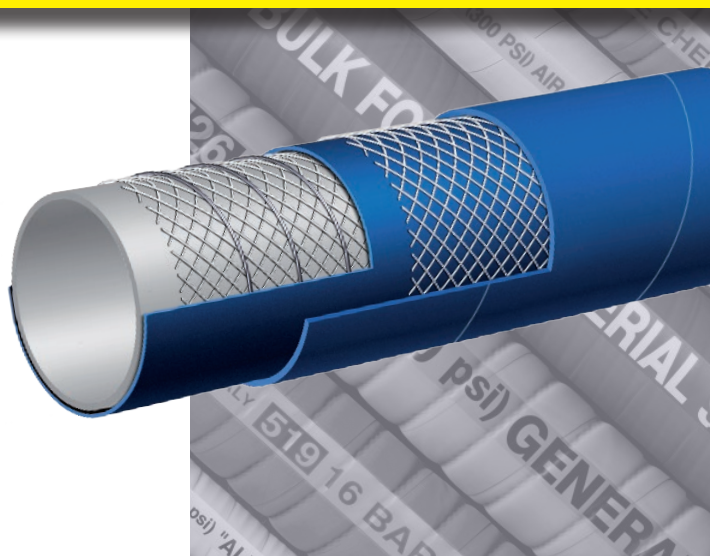

### Applications:

Hot air transfer between the air compressor and dry bulk tank on bulk material carriers.

### Cover:

Blue EPDM – heat, abrasion and ozone resistant.

### Reinforcement:

Spiraled high tensile textile cords with flexible steel helix wire.

### Tube:

White EPDM – heat-resistant. Meets FDA requirements.

### Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

### Temperature Range:

-40°F (-40°C) to 356°F (+180°C)

### Branding:

ALFAGOMMA – ITALY T903 10 BAR (150 PSI) – HOT AIR SERVICE – FDA (in white letters)

### Standard Length:

100 feet

### Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T903LE300	3	76	3.54	90	150	27	9	1.65
T903LE400	4	102	4.57	116	150	27	12	2.26

### COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

★ Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples. Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.