




Kuriyama of America, Inc.
 150 N MARTINGALE ROAD
 SCHAUMBURG, IL 60173-5335 USA
Phone: (847) 755-0360
Toll-Free FAX: (800) 800-0320
International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

PNEU-THANE™ Series K5090 Lightweight Reinforced Polyurethane Pneumatic Air Tool Hose

An extremely lightweight, tough, flexible pneumatic air tool hose that is suitable for a wide range of industrial and construction applications.

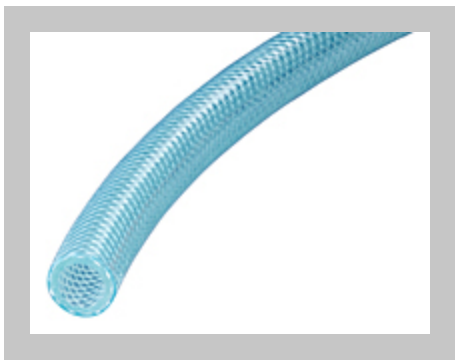

1

<u>Item #</u>	<u>Standard Stock Color</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Maximum Working Pressure at 70 °F (20 °C)</u>	<u>Maximum Working Pressure at 122 °F (50 °C)</u>	<u>Standard Lengths</u>	<u>Packaging</u>	<u>Approx. Wt. Per Pkg.</u>
<u>K5090-04X100</u>	Turquoise Tint	04	1/4 in 6.5 mm	0.395 in 10.0 mm	250 psi	200 psi	100 ft	Coil/ Box	4.0 lb
<u>K5090-04X500</u>	Turquoise Tint	04	1/4 in 6.5 mm	0.395 in 10.0 mm	250 psi	200 psi	500 ft	Reel	27 lb
<u>K5090-06X100</u>	Turquoise Tint	06	3/8 in 9.5 mm	0.560 in 14.2 mm	250 psi	200 psi	100 ft	Coil/ Box	8.0 lb
<u>K5090-06X500</u>	Turquoise Tint	06	3/8 in 9.5 mm	0.560 in 14.2 mm	250 psi	200 psi	500 ft	Reel	47 lb

<u>Item #</u>	<u>Standard Stock Color</u>	<u>Size Code</u>	<u>Nominal ID</u>	<u>Nominal OD</u>	<u>Maximum Working Pressure at 70 °F (20 °C)</u>	<u>Maximum Working Pressure at 122 °F (50 °C)</u>	<u>Standard Lengths</u>	<u>Packaging</u>	<u>Approx. Wt. Per Pkg.</u>
<u>K5090-08X100</u>	Turquoise Tint	08	1/2 in 12.5 mm	0.688 in 17.5 mm	250 psi	200 psi	100 ft	Coil/ Box	10 lb
<u>K5090-08X500</u>	Turquoise Tint	08	1/2 in 12.5 mm	0.688 in 17.5 mm	250 psi	200 psi	500 ft	Reel	57 lb