

flexDUCT™ E (Kanaduct)




Polypropylene general ducting and blower hose

A versatile solution with interlock construction for adjustable inside diameter. Ideal for general ducting, spot coolers, clean room venting, and fume/dust removal, as well as elbows for rigid pipe.

FEATURES

Interlock construction allows the inside diameter to be changed by twisting the hose, while still holding its shape.

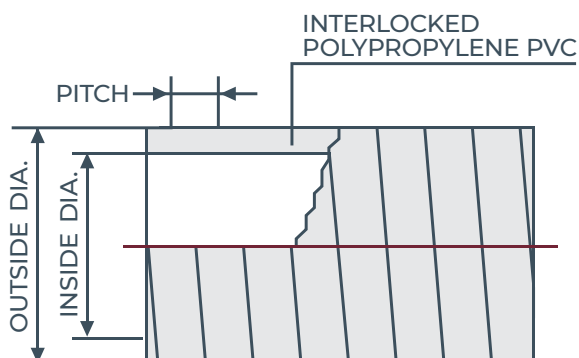

APPLICATIONS

General ducting and blower hose used for spot coolers, clean room venting, fume/dust removal, elbows for rigid pipe

CONSTRUCTION

Interlocked polypropylene

TEMP. RANGE

-13°F to 180°F

NOTE

Not a food grade hose.

AVAILABLE SIZES

ID (inches)	OD (inches)	Pitch (inches)	Minimum Bend Radius (72°F, inches)	Working Pressure (72°F, PSI)	Vacuum Rating (72°F, in Hg)	Weight (Lbs/Ft)	Standard Length (Ft)
2-1/2	2.80	—	6.0	—	—	0.35	20
3	3.23	—	7.0	—	—	0.36	20
4	4.20	—	11.0	—	—	0.52	20
5	5.20	—	14.0	—	—	0.76	20
6	6.16	—	15.0	—	—	0.79	20
8	8.06	—	20.0	—	—	1.07	20
10	10.21	—	27.0	—	—	1.52	10
12	12.07	—	32.0	—	—	1.68	10