

flexFlo™ Spa (SPA WHITE)




Flexible PVC spa hose

A versatile solution for spa applications. Flexible, lightweight, and featuring a smooth bore for precise flow and efficient drainability. Compatible with PVC solvent weld fittings only.

FEATURES

Flexible and lightweight. The smooth bore allows for precise flow because no irregularities in the wall can cause interruptions. Smooth bore also promotes drainability.

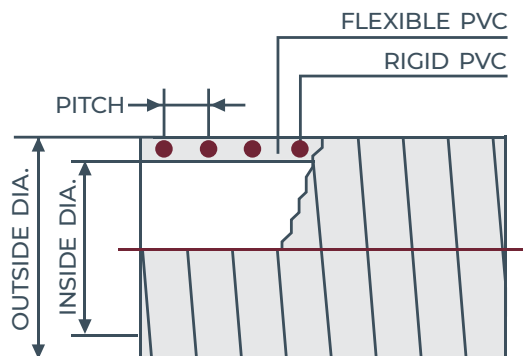

APPLICATIONS

Water lines, air lines, pump lines

CONSTRUCTION

Flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

TEMP. RANGE

-13°F to 158°F

ACCESSORIES

For use with PVC solvent weld fittings only.

NOTE

Not a food-grade hose. For use with PVC solvent weld fittings only. Inside diameter is nominal.

Tolerance on outside diameter is + .020, - .005

See usage/storage suggestions and warranty information before use.

AVAILABLE SIZES

| ID (inches) | OD (inches) | Pitch (inches) | Minimum Bend Radius (72°F, inches) | Working Pressure (72°F, PSI) | Vacuum Rating (72°F, In Hg) | Weight (Lbs/Ft) | Standard Length (Ft) |
|----------------|----------------|-------------------|--|------------------------------------|-----------------------------------|--------------------|----------------------------|
| 1/2 | 0.840 | 0.22 | 3.0 | 100 | 29.8 | 0.16 | 50,100 |
| 3/4 | 1.050 | 0.22 | 3.0 | 100 | 29.8 | 0.23 | 50,100 |
| 1 | 1.315 | 0.28 | 3.0 | 100 | 29.8 | 0.32 | 50,100 |
| 1-1/4 | 1.660 | 0.30 | 4.0 | 80 | 29.8 | 0.37 | 50,100 |
| 1-1/2 | 1.900 | 0.30 | 4.0 | 65 | 29.8 | 0.50 | 50,100 |
| 2 | 2.375 | 0.34 | 5.0 | 60 | 29.8 | 0.65 | 50,100 |

Like other materials, Spa Hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them. Spa Hose should not be used underground in areas infested by termites.